

This is a reproduction of a library book that was digitized by Google as part of an ongoing effort to preserve the information in books and make it universally accessible.

GoogleTM books

<https://books.google.com>



Official handbook of automobiles

Association of
Licensed
Automobile ...



HAND BOOK OF AUTOMOBILES

1916

**NATIONAL AUTOMOBILE
CHAMBER OF COMMERCE
INCORPORATED**

Engineering
Library

TL

I

.H24

1916

Copyright, 1916, by the
NATIONAL AUTOMOBILE CHAMBER OF COMMERCE, Inc.
New York City, N. Y.

Engraved and Printed by
Redfield-Kendrick-Odell Co., Inc.
New York

THIRTEENTH ANNUAL ANNOUNCEMENT

WITH illustrations and specifications describing in detail the products of the principal manufacturers of automobiles in the United States, it is believed that this issue of the annual Hand Book, now the standard authority in the industry, will prove as useful as previous issues.

That comparison may be easy and accurate, all cars herein have been subjected to a uniform investigation as to the equipment and details of construction.

Individual manufacturers listed in this Hand Book will be glad, upon request, to send complete catalogs descriptive of their product, and catalogs may also be obtained from dealers in the principal cities and towns.

January, 1916.

ORGANIZATION OF NATIONAL AUTOMOBILE CHAMBER OF COMMERCE

(INCORPORATED)

OFFICERS

Charles Clifton, <i>President</i>	Pierce-Arrow Motor Car Company
Wilfred C. Leland, <i>Vice-President</i>	Cadillac Motor Car Company
Hugh Chalmers, <i>Second Vice-President</i>	Chalmers Motor Company Gasoline Passenger Division
Windsor T. White, <i>Second Vice-President</i>	The White Company Commerical Vehicle Division
H. H. Rice, <i>Second Vice-President</i>	The Waverley Company Electric Vehicle Division
R. D. Chapin, <i>Secretary</i>	Hudson Motor Car Company
George Pope, <i>Treasurer</i>	Pope Manufacturing Company
Alfred Reeves, <i>General Manager</i>	
	National Automobile Chamber of Commerce
S. A. Miles, <i>Show Manager</i> .	National Automobile Chamber of Commerce

BOARD OF DIRECTORS

Charles Clifton	Pierce-Arrow Motor Car Company
Wilfred C. Leland	Cadillac Motor Car Company
C. C. Hanch	Studebaker Corporation
Hugh Chalmers	Chalmers Motor Company
Alvan Macauley	Packard Motor Car Company
Windsor T. White	The White Company
Wm. E. Metzger	Argo Electric Vehicle Company
J. Walter Drake	Hupp Motor Car Company
Carl H. Pelton	Maxwell Motor Company, Inc.
R. E. Olds	Reo Motor Car Company
H. H. Rice	The Waverley Company
John N. Willys	Willys-Overland Company
R. D. Chapin	Hudson Motor Car Company
C. W. Churchill	The Winton Company

PATENTS COMMITTEE

C. C. Hanch, *Chairman* Studebaker Corporation
Wm. H. VanDervoort Moline Automobile Company
Windsor T. White The White Company
Wilfred C. Leland Cadillac Motor Car Company
Howard E. Coffin Hudson Motor Car Company

TRAFFIC COMMITTEE

Wm. E. Metzger, *Chairman* Argo Electric Vehicle Company
R. E. Olds Reo Motor Car Company
A. I. Philp Dodge Brothers

SHOW COMMITTEE

George Pope, *Chairman* Pope Manufacturing Company
Wilfred C. Leland Cadillac Motor Car Company

LEGISLATIVE COMMITTEE

H. H. Rice, *Chairman* The Waverley Company
J. Walter Drake Hupp Motor Car Company
J. I. Farley Auburn Automobile Company

ELECTRIC VEHICLE COMMITTEE

H. H. Rice, *Chairman* The Waverley Company
Fred R. White The Baker R. & L. Company
W. C. Anderson Anderson Electric Car Company

COMMERCIAL VEHICLE COMMITTEE

Windsor T. White, *Chairman* The White Company
Alvan Macauley Packard Motor Car Company
H. Kerr Thomas Pierce-Arrow Motor Car Company
P. D. Wagoner General Vehicle Company
M. L. Pulcher Federal Motor Truck Company

GOOD ROADS COMMITTEE

R. D. Chapin, *Chairman* Hudson Motor Car Company
S. D. Waldon Cadillac Motor Car Company
Wm. E. Metzger Argo Electric Vehicle Company

HAND BOOK COMMITTEE

Carl H. Pelton, *Chairman* Maxwell Motor Company, Inc.
A. I. Philp Dodge Brothers
A. L. Riker Locomobile Co. of America

ALPHABETICAL INDEX

GASOLINE PASSENGER VEHICLES

	PAGES		PAGES
Allen Motor Company . . .	50	Lexington-Howard Co. . .	64
Apperson Bros. Automobile Co. 82-83		Locomobile Co. of America	70-71
Argo Motor Company . . .	145	Lozier Motor Company . . .	17
Auburn Automobile Co. . .	112-113	McFarlan Motor Company . .	22
Austin Automobile Co. . . .	131	Maxwell Motor Company Inc.	51
Avery Company	136	Mercer Automobile Co. . .	118-120
Briggs-Detroit Co.	147	Mitchell-Lewis Motor Co. . .	54
Briscoe Motor Co. Inc. . .	121-122	Moline Automobile Co. . . .	52-53
Buick Motor Co.	102-103	Moon Motor Car Co.	58
Cadillac Motor Car Co. . .	45-49	Mutual Motors Co.	137
J. I. Case T. M. Co. Inc. . .	66	National Motor Vehicle Co.	55-57
Chalmers Motor Co.	105-106	Nordyke & Marmon Co. . .	101
Chandler Motor Car Co. . .	67	Oakland Motor Car Co. . . .	95-97
Chevrolet Motor Co. of Mich. 41-43		Olds Motor Works	76-77
Cole Motor Car Co.	23	Packard Motor Car Co. . . .	84-86
Consolidated Car Co. . . .	123-124	Paige-Detroit Motor Car Co.	78-79
Jas. Cunningham Son & Co. .	69	W. A. Paterson Co.	44
Dodge Brothers	15	Pathfinder Company	68
Dort Motor Car Co.	144	Peerless Motor Car Co. . . .	138
Elkhart Carr. & Motor Car Co.	104	Pierce-Arrow Motor Car Co.	25-35
Empire Automobile Co. . . .	110	Premier Motor Mfg. Co. . .	114-117
F. I. A. T.	59	Pullman Motor Car Co. . . .	60
H. H. Franklin Mfg. Co. . .	16	Regal Motor Car Co.	111
Grant Motor Company	146	Reo Motor Car Co.	91-92
Great Western Automobile Co.	37	Saxon Motor Company	89-90
Haynes Automobile Co. . . .	61-63	Scripps-Booth Company . . .	36
Hudson Motor Car Co. . . .	139-142	F. B. Stearns Company . . .	80-81
Hupp Motor Car Co.	18-21	Studebaker Corporation . . .	93-94
Inter-State Motor Co. . . .	24	Stutz Motor Car Co.	87-88
Jackson Automobile Co. . . .	98-100	Velie Motor Vehicle Co. . . .	38
Thomas B. Jeffery Co.	65	Westcott Motor Car Co. . . .	39-40
King Motor Car Co.	107-109	The White Company	132-135
Kissel Motor Car Co.	125-126	Willys-Overland Co.	72-75
Kline Motor Car Corp. . . .	143	The Winton Company	129-130
Lewis Spring & Axle Co. . .	127-128		

ALPHABETICAL INDEX—Continued

ELECTRIC VEHICLES

	PAGES		PAGES
American Electric Car Co.	161	General Vehicle Co. Inc.	157
Anderson Electric Car Co.	151	Milburn Wagon Co.	158
Argo Electric Vehicle Co.	159	Ohio Electric Car Co.	152
Baker R. & L. Co.	154-155	The Waverley Co.	156
Borland-Grannis Co.	160	Woods Motor Vehicle Co.	153

GASOLINE COMMERCIAL VEHICLES

American-La France Fire En- gine Co.	186-193	Packard Motor Car Co.	184-185
Autocar Company	171	Peerless Motor Car Co.	202-203
Buick Motor Co.	176	Pierce-Arrow Motor Car Co.	169-170
Denby Motor Truck Co.	212-213	Reo Motor Car Co.	194-195
Federal Motor Truck Co.	172-173	Saurer Motor Co.	178
General Motors Truck Co.	165	Selden Motor Vehicle Co.	208-211
General Vehicle Co. Inc.	166	Sterling Motor Truck Co.	168
Gamm Motor Truck Co.	196-197	Studebaker Corporation	183
Kelly-Springfield M. T. Co.	180-182	Velie Motor Vehicle Co.	167
Kissel Motor Car Co.	199-201	Vim Motor Truck Co.	198
Locomobile Co. of America	174-175	Walter Motor Truck Co.	177
Mack Bros. Motor Car Co.	179	The White Company	204-207

ALPHABETICAL INDEX

GASOLINE PASSENGER VEHICLES

	PAGES		PAGES
Allen Motor Company . . .	50	Lexington-Howard Co. . .	64
Apperson Bros. Automobile Co. . .	82-83	Locomobile Co. of America . .	70-71
Argo Motor Company . . .	145	Lozier Motor Company . . .	17
Auburn Automobile Co. . .	112-113	McFarlan Motor Company . .	22
Austin Automobile Co. . .	131	Maxwell Motor Company Inc. .	51
Avery Company . . .	136	Mercer Automobile Co. . .	118-120
Briggs-Detroit Co. . .	147	Mitchell-Lewis Motor Co. . .	54
Briscoe Motor Co. Inc. . .	121-122	Moline Automobile Co. . .	52-53
Buick Motor Co. . .	102-103	Moon Motor Car Co. . .	58
Cadillac Motor Car Co. . .	45-49	Mutual Motors Co. . .	137
J. I. Case T. M. Co. Inc. . .	66	National Motor Vehicle Co. .	55-57
Chalmers Motor Co. . .	105-106	Nordyke & Marmon Co. . .	101
Chandler Motor Car Co. . .	67	Oakland Motor Car Co. . .	95-97
Chevrolet Motor Co. of Mich. .	41-43	Olds Motor Works . . .	76-77
Cole Motor Car Co. . .	23	Packard Motor Car Co. . .	84-86
Consolidated Car Co. . .	123-124	Paige-Detroit Motor Car Co. .	78-79
Jas. Cunningham Son & Co. . .	69	W. A. Paterson Co. . .	44
Dodge Brothers . . .	15	Pathfinder Company . . .	68
Dort Motor Car Co. . .	144	Peerless Motor Car Co. . .	138
Elkhart Carr. & Motor Car Co. .	104	Pierce-Arrow Motor Car Co. .	25-35
Empire Automobile Co. . .	110	Premier Motor Mfg. Co. . .	114-117
F. I. A. T. . . .	59	Pullman Motor Car Co. . .	60
H. H. Franklin Mfg. Co. . .	16	Regal Motor Car Co. . .	111
Grant Motor Company . . .	146	Reo Motor Car Co. . .	91-92
Great Western Automobile Co. .	37	Saxon Motor Company . . .	89-90
Haynes Automobile Co. . .	61-63	Scripps-Booth Company . . .	36
Hudson Motor Car Co. . .	139-142	F. B. Stearns Company . . .	80-81
Hupp Motor Car Co. . .	18-21	Studebaker Corporation . .	93-94
Inter-State Motor Co. . .	24	Stutz Motor Car Co. . .	87-88
Jackson Automobile Co. . .	98-100	Velie Motor Vehicle Co. . .	38
Thomas B. Jeffery Co. . .	65	Westcott Motor Car Co. . .	39-40
King Motor Car Co. . .	107-109	The White Company . . .	132-135
Kissel Motor Car Co. . .	125-126	Willys-Overland Co. . .	72-75
Kline Motor Car Corp. . .	143	The Winton Company . . .	129-130
Lewis Spring & Axle Co. . .	127-128		

ALPHABETICAL INDEX—Continued

ELECTRIC VEHICLES

	PAGES		PAGES
American Electric Car Co.	161	General Vehicle Co. Inc.	157
Anderson Electric Car Co.	151	Milburn Wagon Co.	158
Argo Electric Vehicle Co.	159	Ohio Electric Car Co.	152
Baker R. & L. Co.	154-155	The Waverley Co.	156
Borland-Grannis Co.	160	Woods Motor Vehicle Co.	153

GASOLINE COMMERCIAL VEHICLES

American-La France Fire En- gine Co.	186-193	Packard Motor Car Co.	184-185
Autocar Company	171	Peerless Motor Car Co.	202-203
Buick Motor Co.	176	Pierce-Arrow Motor Car Co.	169-170
Denby Motor Truck Co.	212-213	Reo Motor Car Co.	194-195
Federal Motor Truck Co.	172-173	Saurer Motor Co.	178
General Motors Truck Co.	165	Selden Motor Vehicle Co.	208-211
General Vehicle Co. Inc.	166	Sterling Motor Truck Co.	168
Gramm Motor Truck Co.	196-197	Studebaker Corporation	183
Kelly-Springfield M. T. Co.	180-182	Velie Motor Vehicle Co.	167
Kissel Motor Car Co.	199-201	Vim Motor Truck Co.	198
Locomobile Co. of America	174-175	Walter Motor Truck Co.	177
Mack Bros. Motor Car Co.	179	The White Company	204-207

INDEX OF TRADE NAMES

GASOLINE PASSENGER VEHICLES

	PAGES		PAGES
Abbott-Detroit	123-124	Lexington	64
Allen	50	Locomobile	70-71
Apperson	82-83	Lozier	17
Argo	145	McFarlan	22
Auburn	112-113	Marion	137
Austin	131	Marmon	101
Briscoe	121-122	Maxwell	51
Buick	102-103	Mercer	118-120
Cadillac	45-49	Mitchell	54
Case	66	Moline-Knight	52-53
Chalmers	105-106	Moon	58
Chandler	67	National	55-57
Chevrolet	41-43	Oakland	95-97
Cole	23	Oldsmobile	76-77
Cunningham	69	Overland	72-74
Detroit	147	Packard	84-86
Dodge Brothers	15	Paige	78-79
Dort	144	Paterson	44
Elcar	104	Pathfinder	68
Empire	110	Peerless	138
F. I. A. T.	59	Pierce-Arrow	25-35
Franklin	16	Premier	114-117
Glide	136	Pullman	60
Grant	146	Regal	111
Great Western	37	Reo	91-92
Haynes	61-63	Saxon	89-90
Hollier	127-128	Scripps-Booth	36
Hudson	139-142	Stearns-Knight	80-81
Hupmobile	18-21	Studebaker	93-94
Inter-State	24	Stutz	87-88
Jackson	98-100	Velie	38
Jeffery	65	Westcott	39-40
King	107-109	White	132-135
Kissel-Kar	125-126	Willys-Knight	75
Kline-Kar	143	Winton	129-130

INDEX OF TRADE NAMES—Continued

ELECTRIC VEHICLES

	PAGES		PAGES
American-Argo	159	Milburn	158
American-Borland	160	Ohio	152
American-Broc	161	Rauch & Lang	154
Baker	155	Waverley	156
Detroit	151	Woods	153
G. V. Electric	157		

GASOLINE COMMERCIAL VEHICLES

American-La France	186-193	Packard	184-185
Autocar	171	Peerless	202-203
Buick	176	Pierce-Arrow	169-170
Denby	212-213	Reo	194-195
Federal	172-173	Saurer	178
G. M. C.	165	Selden	208-211
G. V. Mercedes	166	Sterling	168
Garford	196-197	Studebaker	183
Kelly-Springfield	180-182	Velie	167
Kissel-Kar	199-201	Vim	198
Locomobile	174-175	Walter	177
Mack	179	White	204-207

N. A. C. C. HORSE-POWER RATING

The standard horse-power rating, formerly known as the A. L. A. M. Rating, has been officially adopted by the National Automobile Chamber of Commerce, Inc.

The formula adopted is $\frac{D^2 \times N}{2.5}$. D is the cylinder bore in inches, N the number of cylinders, and 2.5 a constant, based on the average view of eminent engineers as to a fair, conservative rating for a four-cycle motor at one thousand feet per minute piston speed.

TABLE OF HORSE-POWER FOR USUAL SIZES OF MOTORS


Ins.	2 CYLS.	4 CYLS.	6 CYLS.	8 CYLS.	12 CYLS.
2½	5.00	10.00	15.00	20.00	30.00
2⅝	5.50	11.03	16.54	22.05	33.08
2¾	6.00	12.10	18.15	24.20	36.30
2⅞	6.62	13.23	19.84	26.45	39.68
3	7.20	14.40	21.60	28.80	43.20
3⅛	7.81	15.63	23.44	31.25	46.88
3¼	8.50	16.90	25.35	33.80	50.70
3⅝	9.12	18.23	27.34	36.45	54.68
3½	9.80	19.60	29.40	39.20	58.80
3⅞	10.50	21.03	31.54	42.05	63.08
3¾	11.25	22.50	33.75	45.00	67.50
3⅞	12.00	24.03	36.04	48.05	72.08
4	12.80	25.60	38.40	51.20	76.80
4⅛	13.62	27.23	40.84	54.45	81.68
4¼	14.50	28.90	43.35	57.80	86.70
4⅝	15.31	30.63	45.94	61.25	91.88
4½	16.20	32.40	48.60	64.80	97.20
4⅞	17.12	34.23	51.34	68.45	102.68
4¾	18.00	36.10	54.15	72.20	108.30
4⅞	19.00	38.03	57.04	76.05	114.08
5	20.00	40.00	60.00	80.00	120.00
5⅛	21.00	42.03	63.04	84.05	126.08
5¼	22.00	44.10	66.15	88.20	132.30
5⅝	23.00	46.23	69.34	92.45	138.68
5½	24.20	48.40	72.60	96.80	145.20
5⅞	25.31	50.63	75.94	101.25	151.88
5¾	26.50	52.90	79.35	105.80	158.70
5⅞	27.62	55.23	82.84	110.45	165.68
6	28.80	57.60	86.40	115.20	172.80

**ILLUSTRATIONS AND
SPECIFICATIONS
GASOLINE
PASSENGER
VEHICLES**

STANDARD CARS, TRUCKS, AND BUSES, 1914-1915

**D O D G E
B R O T H E R S**
DETROIT MOTOR CAR CO. DETROIT, MICH.
**D E T R O I T
M I C H I G A N**

Price	\$785
Winter Touring Car . . .	950
Winter Roadster	950
Standard Roadster . . .	785

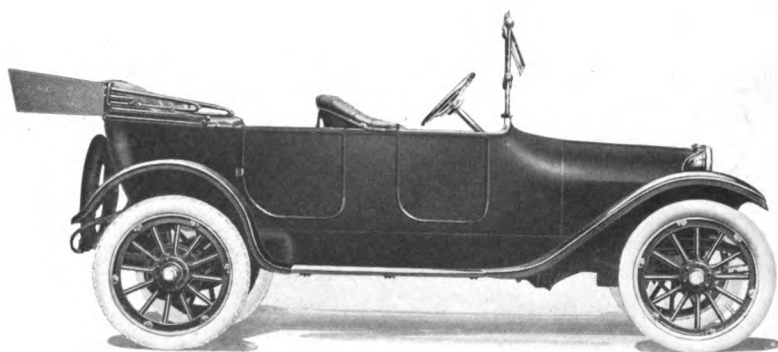

DODGE BROTHERS MOTOR CAR


COLOR	Ebony black
SEATING CAPACITY . .	Five persons
POSITION OF DRIVER .	Left side
WHEELBASE	110 inches
GAUGE	56 or 60 inches
WHEELS	Wood
FRONT TIRES	32 x 3 1/4 inches
REAR TIRES	32 x 3 1/4 inches, anti-skid
SERVICE BRAKE . . .	Contracting on rear wheels
EMERGENCY BRAKE . .	Expanding on rear wheels
CYLINDERS	Four
ARRANGED	Vertically
CAST	En bloc
HORSEPOWER	24.03 (N. A. C. C. Rating)
BORE AND STROKE . .	3 3/4 x 4 1/2 inches
LUBRICATION	Splash with circulating pump

RADIATOR	Tubular
COOLING	Water pump
IGNITION	High-tension magneto
STARTING SYSTEM . .	Single unit
STARTER OPERATED .	Chain to crank shaft
LIGHTING SYSTEM . .	Electric
VOLTAGES	Starting, twelve; lighting, fourteen
WIRING SYSTEM . . .	Starting, double; lighting, single
GASOLINE SYSTEM . .	Vacuum
CLUTCH	Cone
TRANSMISSION	Selective sliding
GEAR CHANGES . . .	Three forward, one reverse
DRIVE	Plain bevel
REAR AXLE	Full floating
STEERING GEAR	Worm and worm wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, battery indicator and demountable rim

**H. H. FRANKLIN
MANUFACTUR-
ING COMPANY
SYRACUSE
NEW YORK**

Price	\$1950
Three-Passenger Roadster	1900
Five-Passenger Sedan	2850
Four - Passenger Doctor's Car	2800
Seven-Passenger Berlin	3100

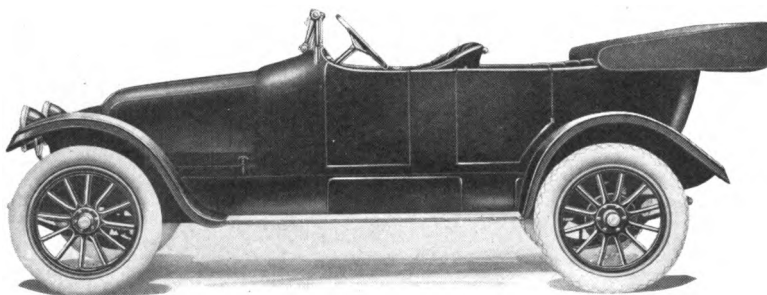

FRANKLIN TOURING CAR

COLOR	Brewster green with russet brown wheels	BORE AND STROKE	3½ x 4 inches
SEATING CAPACITY	Five persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	COOLING	Air
WHEELBASE	120 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Chain to crankshaft
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Twelve
SERVICE BRAKE	Contracting on transmission	WIRING SYSTEM	Double
EMERGENCY BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Six	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	Separately	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	31.54 (N. A. C. C. Rating)	DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes
top, hood, windshield and speedometer




LOZIER TOURING CAR—TYPE 82

COLOR	Lozier blue	RADIATOR	Cellular
SEATING CAPACITY . .	Seven persons	COOLING	Water pump
POSITION OF DRIVER .	Left side	IGNITION	High tension magneto and storage battery
WHEELBASE	132 inches	STARTING SYSTEM . .	Two unit
GAUGE	56 inches	STARTER OPERATED .	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM . .	Electric
FRONT TIRES	36 x 4½ inches	VOLTAGES	Six
REAR TIRES	36 x 4½ inches, anti-skid	WIRING SYSTEM . . .	Single
SERVICE BRAKE	Internal on rear wheels	GASOLINE SYSTEM . .	Pressure
EMERGENCY BRAKE . .	Internal on rear wheels	CLUTCH	Multiple disc in oil
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Three forward, one reverse
CAST	In threes	DRIVE	Spiral bevel
HORSEPOWER	36.04 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE . .	3¾ x 6 inches	STEERING GEAR	Worm
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**HUPP MOTOR
CAR COMPANY
DETROIT
MICHIGAN**

Price \$1085
Two-Passenger Roadster . . 1085

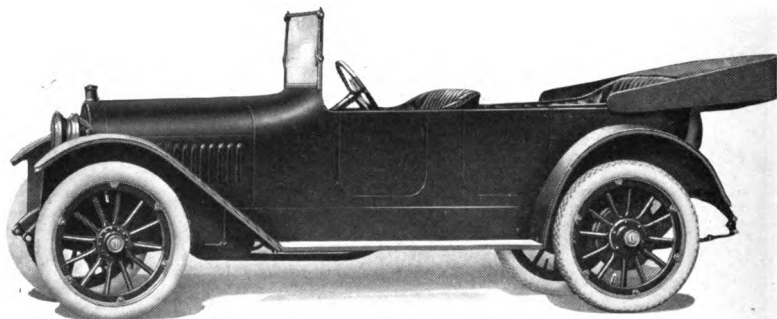

HUPMOBILE FIVE-PASSENGER TOURING CAR


COLOR	Body, Brewster green; chassis, black.	BORE AND STROKE	3¼ x 5½ inches
SEATING CAPACITY	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	119 inches	COOLING	Thermo-syphon
GAUGE	56 or 60 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically, under hood	CLUTCH	Multiple disc in oil
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	22.5	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Split nut

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

HUPP MOTOR CAR COMPANY

DETROIT
MICHIGAN

Price \$1185
Two-Passenger Year-'round Coupe . 1165

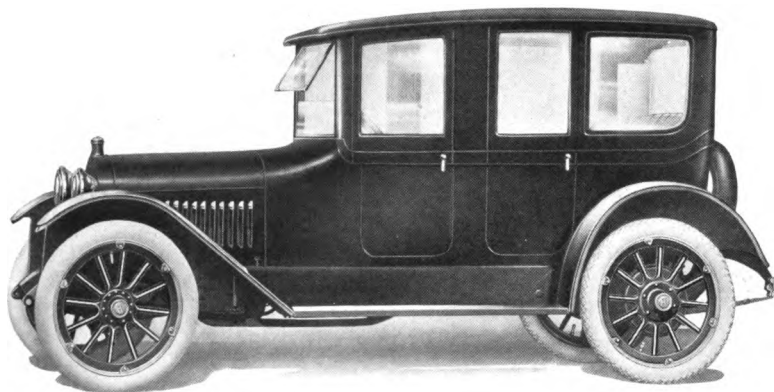


HUPMOBILE YEAR-'ROUND TOURING CAR

COLOR	Body, Brewster green; chassis, black	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	119 inches	IGNITION	Storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE . .	3¼ x 5½ inches	REAR AXLE	Three-quarters floating
		SLIDING GEAR	Split nut

**HUPP MOTOR
CAR COMPANY**
DETROIT
MICHIGAN

Price \$1225
Seven-Passenger Limousine . 2365

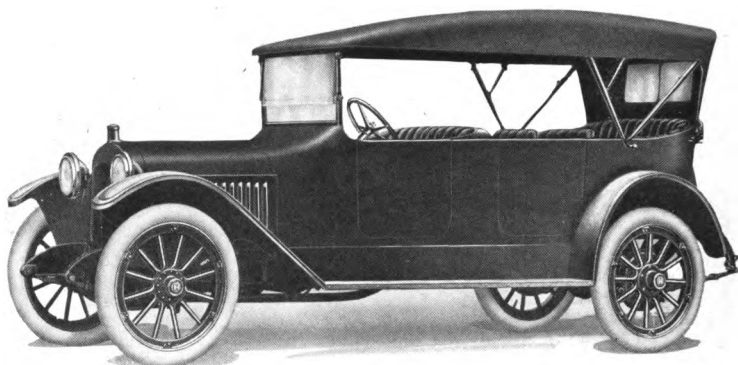

HUPMOBILE SEVEN-PASSENGER TOURING CAR


COLOR	Body, Brewster green; chassis, black	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	22.5	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Three-quarters floating
BORE AND STROKE .	3¼ x 5½ inches	STEERING GEAR . . .	Split nut

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

HUPP MOTOR CAR COMPANY

DETROIT
MICHIGAN

Price, \$1365

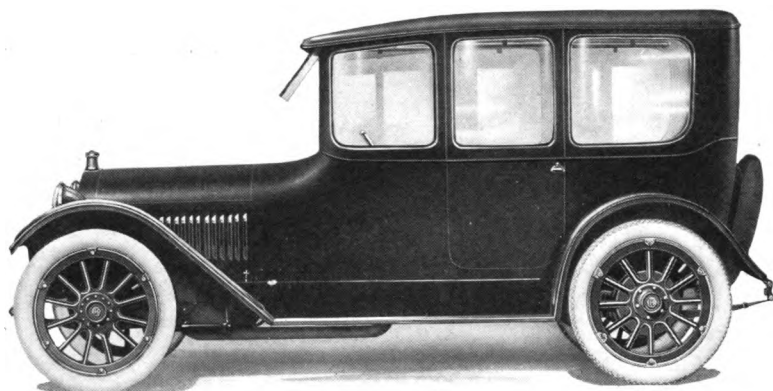

HUPMOBILE SEDAN


COLOR	Body, Hupmobile blue; chassis, black	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER.	Left side	COOLING	Thermo-syphon
WHEELBASE	119 inches	IGNITION	Storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¼ x 5½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Split nut

HUPP MOTOR CAR COMPANY

FINANCIAL - JET - AIR - ROAD - TOUR - MOTOR - CAR - EQUIPMENT - & - ACCESSORIES

DETROIT
MICHIGAN


Price \$1225
Seven-Passenger Limousine . 2365

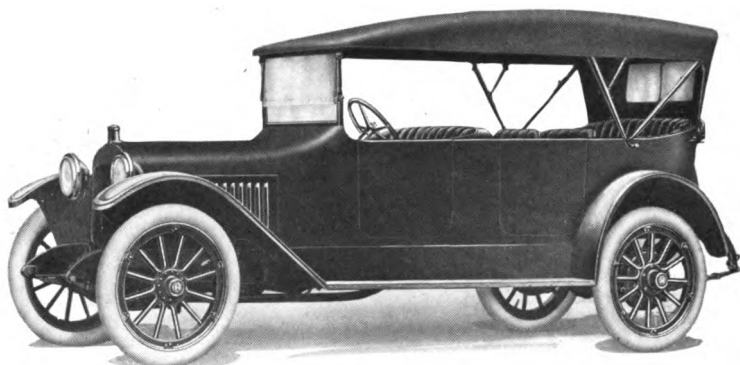

HUPMOBILE SEVEN-PASSENGER TOURING CAR

COLOR	Body, Brewster green; chassis, black	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM .	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM .	Gravity
CYLINDERS	Four	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . .	Three forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¾ x 5½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Split nut

In addition to above specifications, price includes top, hood, windshield, speedometer and demountable rims

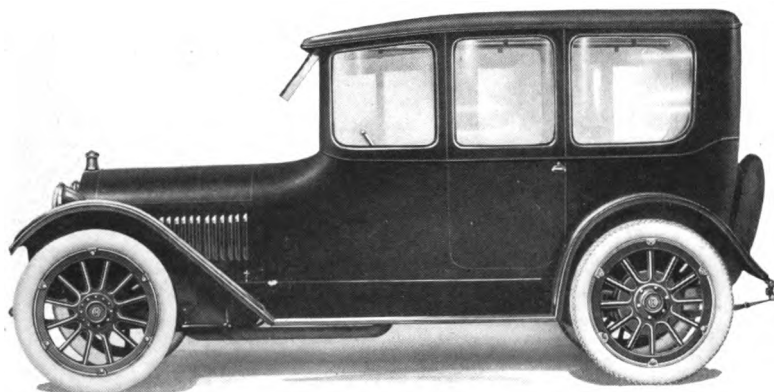


HUPMOBILE SEDAN

COLOR	Body, Hupmobile blue; chassis, black	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER.	Left side	COOLING	Thermo-syphon
WHEELBASE	119 inches	IGNITION	Storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM .	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM .	Gravity
CYLINDERS	Four	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . .	Three forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¾ x 5½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Split nut

**McFARLAN
MOTOR
COMPANY**
CONNSVILLE
INDIANA

Price	\$2990
Touring Roadster	2990
Four-Passenger Submarine.	3140
Six-Passenger Touring	2990
Semi-Touring	4400
Six-Passenger Sedan	4000
Town Car	4000
Coupe	3600
Berline	4300
Limousine	4200
Landaulet	4200

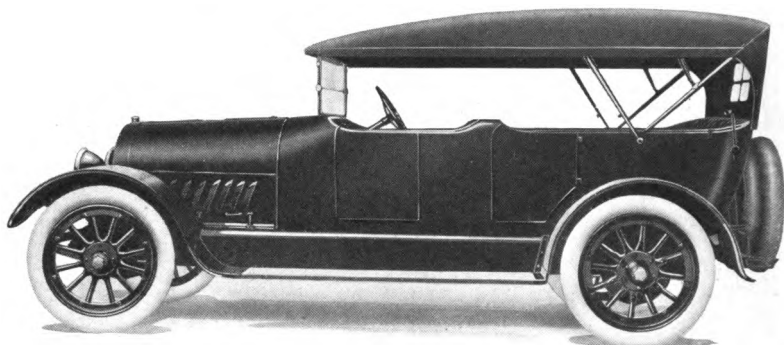

McFARLAN SIX—SERIES X-107


COLOR	Optional	BORE AND STROKE	4½ x 6 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Honeycomb
WHEELBASE	132 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	36 x 4½ inches, cord	STARTER OPERATED	Gear to fly wheel
REAR TIRES	36 x 4½ inches, cord	LIGHTING SYSTEM	Electric
SERVICE BRAKE	External contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Internal expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	48.6	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**COLE MOTOR
CAR COMPANY**

**INDIANAPOLIS
I N D I A N A**

Price \$1595
Three-Passenger Roadster . . 1595

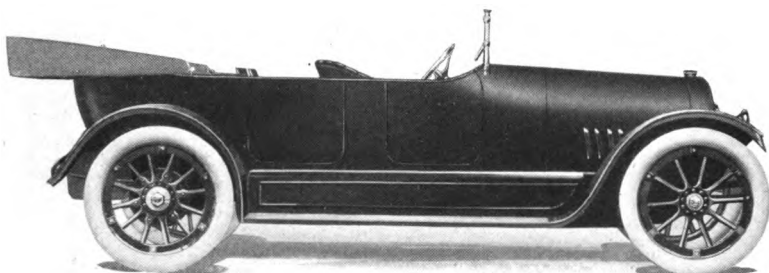


COLE TOURING CAR—860-G

COLOR	Norland green	BORE AND STROKE . . .	3½ x 4½ inches
SEATING CAPACITY . .	Seven persons	LUBRICATION	Force feed
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	127 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . . .	Single unit
FRONT TIRES	35 x 4½ inches	STARTER OPERATED . .	Gear to fly wheel
REAR TIRES	35 x 4½ inches, anti-skid	LIGHTING SYSTEM . . .	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE . .	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Eight	GASOLINE SYSTEM . . .	Vacuum
ARRANGED	V-type, 90 degrees	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	39.2 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter and demountable rims

**INTER-STATE
MOTOR
COMPANY
MUNCIE
INDIANA**

**Price . . . \$850
Roadster . . 850**

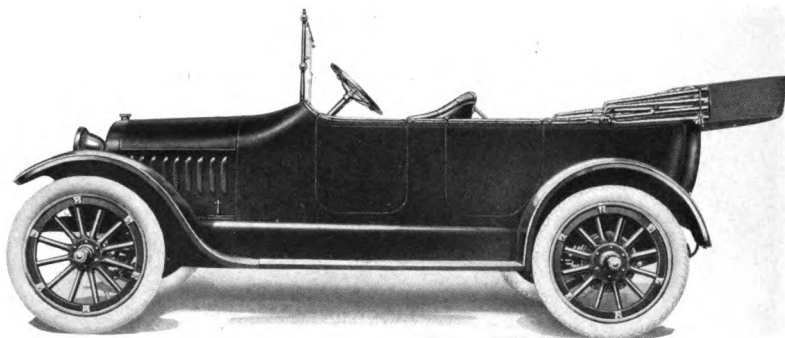


INTER-STATE TOURING CAR—T

COLOR	Blue	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER.	Left side	COOLING	Thermo-syphon
WHEELBASE	110 inches	IGNITION	Storage battery
GAUGE.	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	33 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	33 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	External on rear axle	WIRING SYSTEM. . .	Single
EMERGENCY BRAKE .	Internal on rear axle	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	19.6 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	3½ x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, electrical indicator and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY
B U F F A L O
N E W Y O R K**

Price	\$4300
Two-Passenger Runabout	4300
Three-Passenger Runabout	4300
Two-Passenger Coupe	5000
Three-Passenger Coupe	5000
Four-Passenger Touring	4300
Brougham	5200
Landaulet	5200
Sedan	5200
Brougham-Landaulet	5200
Vestibule Brougham	5350
Vestibule Landaulet	5350
Vestibule Brougham-Landaulet	5350

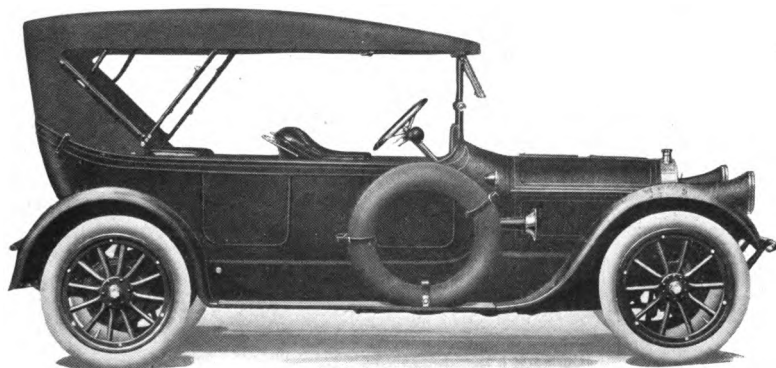


PIERCE-ARROW FIVE-PASSENGER TOURING CAR—38-C-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Five persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	134 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	36 x 4½ inches	VOLTAGES	Six
REAR TIRES	36 x 4½ inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically under hood	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	38.4 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4 x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes top, top hood, windshield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY**
JANUARY 1914
**BUFFALO
NEW YORK**

Price	\$4300
Two-Passenger Runabout	4300
Four-Passenger Touring	4300
Two-Passenger Coupe	5000
Three-Passenger Coupe	5000
Five-Passenger Touring	4300
Brougham	5200
Landaulet	5200
Sedan	5200
Brougham-Landaulet	5200
Vestibule Brougham	5350
Vestibule Landaulet	5350
Vestibule Brougham-Landaulet	5350

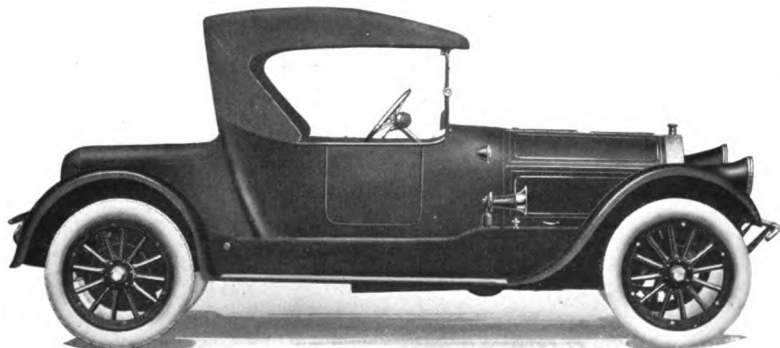


PIERCE-ARROW THREE-PASSENGER RUNABOUT—38-C-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Four persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	134 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	36 x 4½ inches	VOLTAGES	Six
REAR TIRES	36 x 4½ inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	38.4 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4 x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes top, top hood, windshield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY
B U F F A L O
N E W Y O R K**

Price	\$5000
Two-Passenger Runabout	4300
Three-Passenger Runabout	4300
Two-Passenger Coupe	5000
Four-Passenger Touring	4300
Five-Passenger Touring	4300
Brougham	5200
Brougham-Landaulet	5200
Vestibule Landaulet	5350
Vestibule Brougham	5350
Vestibule Brougham-Landaulet	5350
Landaulet	5200
Sedan	5200

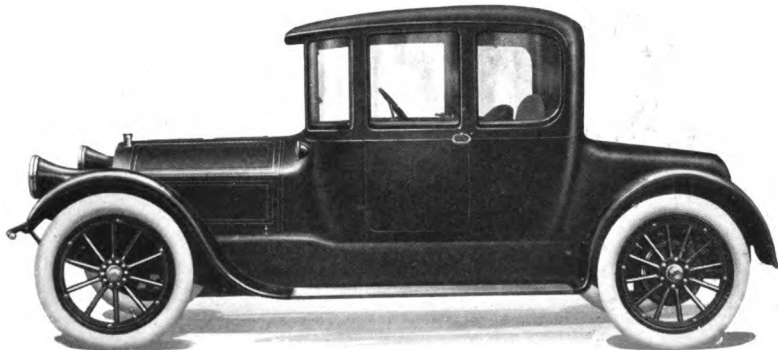


PIERCE-ARROW THREE-PASSENGER COUPE—38-C-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Four persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	134 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	36 x 4 1/2 inches	VOLTAGES	Six
REAR TIRES	36 x 4 1/2 inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	38.4 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4 x 5 1/2 inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes wind-
shield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY**
BUFFALO
NEW YORK

Price	\$5200
Two-Passenger Runabout	4300
Three-Passenger Runabout	4300
Two-Passenger Coupe	5000
Three-Passenger Coupe	5000
Four-Passenger Touring	4300
Five-Passenger Touring	4300
Brougham	5200
Landaulet	5200
Sedan	5200
Vestibule Brougham	5350
Vestibule Landaulet	5350
Vestibule Brougham-Landaulet	5350

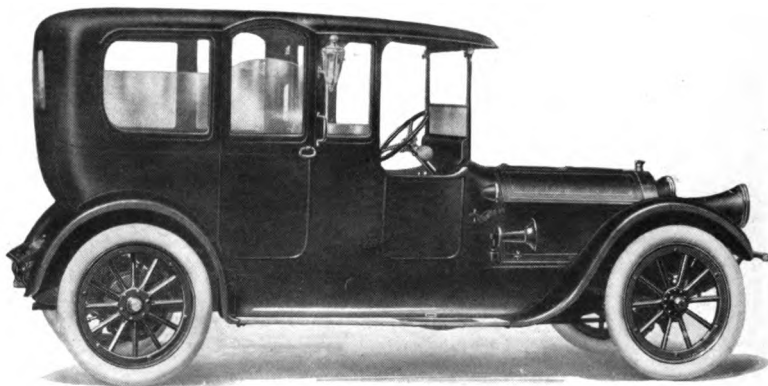


PIERCE-ARROW BROUGHAM—38-C-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	134 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	36 x 4½ inches	VOLTAGES	Six
REAR TIRES	36 x 4½ inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	38.4 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4 x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes wind-
shield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY
BUFFALO
NEW YORK**

Price	\$5200
Two-Passenger Runabout	4300
Three-Passenger Runabout	4300
Two-Passenger Coupe	5000
Three-Passenger Coupe	5000
Four-Passenger Touring	4300
Five-Passenger Touring	4300
Landaulet	5200
Sedan	5200
Brougham	5200
Vestibule Brougham	5350
Vestibule Landaulet	5350
Vestibule Brougham-Landaulet	5350

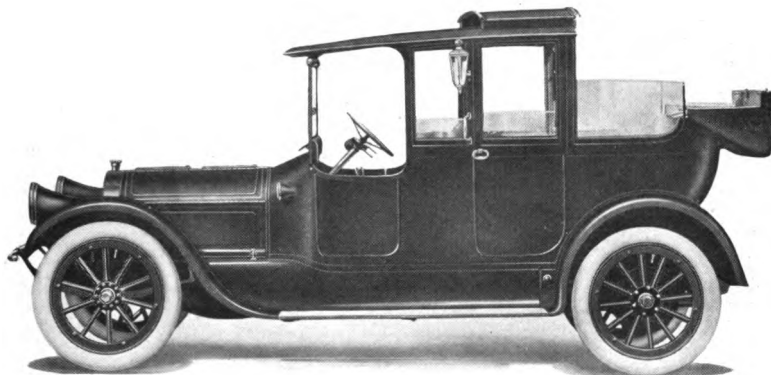

PIERCE-ARROW BROUGHAM-LANDAULET—38-C-4


COLOR	Optional
SEATING CAPACITY	Seven persons
POSITION OF DRIVER	Right side
WHEELBASE	134 inches
GAUGE	56 inches
WHEELS	Wood
FRONT TIRES	36 x 4½ inches
REAR TIRES	36 x 4½ inches
SERVICE BRAKE	Expanding on rear wheels
EMERGENCY BRAKE	Contracting on rear wheels
CYLINDERS	Six
ARRANGED	Vertically
CAST	In pairs
HORSEPOWER	38.4 (N. A. C. C. Rating)
BORE AND STROKE	4 x 5½ inches

LUBRICATION	Force feed
RADIATOR	Cellular
COOLING	Water
IGNITION	High-tension magneto and storage battery
STARTING SYSTEM	Two unit
STARTER OPERATED	Gear to fly wheel
LIGHTING SYSTEM	Electric
VOLTAGES	Six
WIRING SYSTEM	Single
GASOLINE SYSTEM	Pressure
CLUTCH	Cone
TRANSMISSION	Selective sliding
GEAR CHANGES	Four forward, one reverse
DRIVE	Spiral bevel
REAR AXLE	Semi-floating
STEERING GEAR	Screw and nut

In addition to above specifications, price includes windshield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY**
HEADQUARTERS FOR THE UNITED STATES AND CANADA
**BUFFALO
NEW YORK**

Price	\$5000
Two-Passenger Runabout	4900
Three-Passenger Runabout	4900
Two-Passenger Coupe	5700
Three-Passenger Coupe	5700
Four-Passenger Touring	4900
Five-Passenger Touring	4900
Suburban	6000
Landau	6000
Brougham	5800
Suburban-Landau	6000
Vestibule Suburban	6200
Vestibule Landau	6200
Vestibule Brougham	5950
Vestibule Suburban-Landau	6200

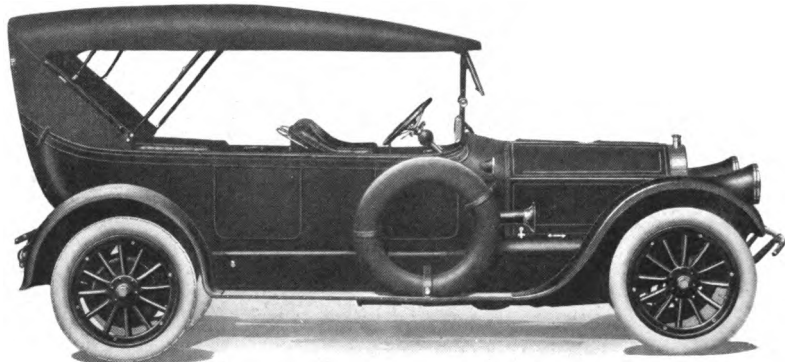


PIERCE-ARROW SEVEN-PASSENGER TOURING CAR—48-B-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	142 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	37 x 5 inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	48.6 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4½ x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes top, top hood, windshield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY**
B U F F A L O
N E W Y O R K

Price	\$6000
Two-Passenger Runabout	4900
Three-Passenger Runabout	4900
Two-Passenger Coupe	5700
Three-Passenger Coupe	5700
Four-Passenger Touring	4900
Five-Passenger Touring	4900
Seven-Passenger Touring	5000
Landau	6000
Brougham	5800
Suburban	6000
Vestibule Suburban	6200
Vestibule Landau	6200
Vestibule Brougham	5950
Vestibule Suburban-Landau	6200

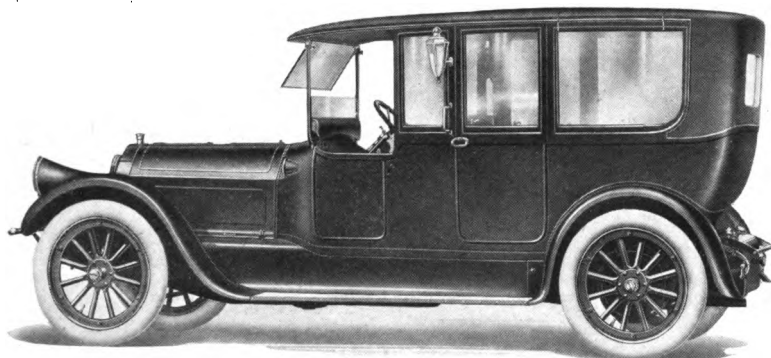

PIERCE-ARROW SUBURBAN LANDAU—48-B-4


COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	142 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	37 x 5 inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	48.6 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4½ x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes wind-
shield, speedometer, autometer, clock and demountable rims

PIERCE-ARROW MOTOR CAR COMPANY

**B U F F A L O
N E W Y O R K**

Price	\$6000
Two-Passenger Runabout	4900
Three-Passenger Runabout	4900
Two-Passenger Coupe	5700
Three-Passenger Coupe	5700
Four-Passenger Touring	4900
Five-Passenger Touring	4900
Seven-Passenger Touring	5000
Suburban Landau	6000
Landau	6000
Brougham	5800
Vestibule Suburban.	6200
Vestibule Landau	6200
Vestibule Brougham	5950
Vestibule Suburban-Landau	6200

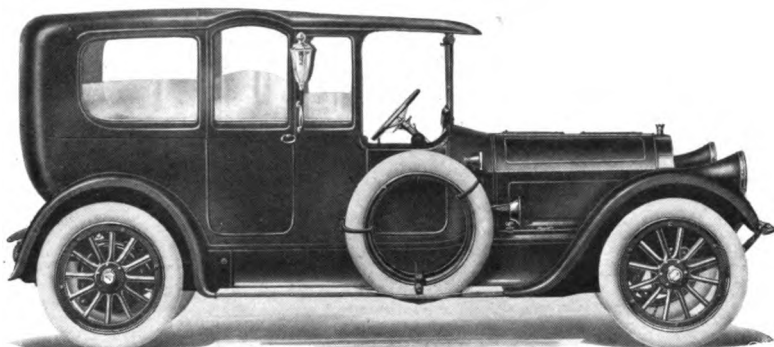


PIERCE-ARROW SUBURBAN—48-B-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	142 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	37 x 5 inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	48.6 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4½ x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes wind-shield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY
BUFFALO
NEW YORK**

Price	\$6000
Two-Passenger Runabout	4900
Three-Passenger Runabout	4900
Two-Passenger Coupe	5700
Three-Passenger Coupe	5700
Four-Passenger Touring	4900
Five-Passenger Touring	4900
Seven-Passenger Touring	5000
Suburban	6000
Brougham	5800
Suburban-Landau	6000
Vestibule Suburban	6200
Vestibule Landau	6200
Vestibule Brougham	5950
Vestibule Suburban-Landau	6200

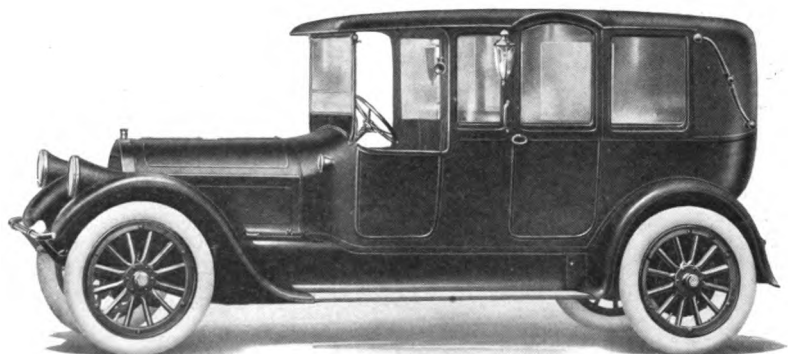


PIERCE-ARROW LANDAU—48-B-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water . .
POSITION OF DRIVER	Right side	IGNITION	High-tension magneto and storage battery
WHEELBASE	142 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	37 x 5 inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	48.6 (N. A. C. C. Rating)	REAR AXLE	Semi-floating
BORE AND STROKE	4½ x 5½ inches	STEERING GEAR	Screw and nut
LUBRICATION	Force feed		

In addition to above specifications, price includes windshield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY**
INCORPORATED
**BUFFALO
NEW YORK**

Price	\$7200
Two-Passenger Runabout	5900
Three-Passenger Runabout	5900
Two-Passenger Coupe	6700
Three-Passenger Coupe	6700
Four-Passenger Touring	5900
Five-Passenger Touring	6000
Seven-Passenger Touring	7000
Suburban	7000
Landau	7000
Brougham	6800
Suburban-Landau	7000
Vestibule Landau	7200
Vestibule Brougham	6950
Vestibule Suburban-Landau	7200

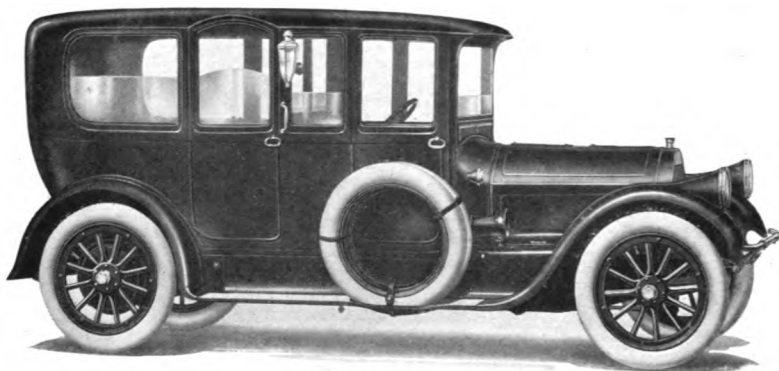

PIERCE-ARROW VESTIBULE SUBURBAN—66-A-4


COLOR	Optional	LUBRICATION	Force feed
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Right side	COOLING	Water
WHEELBASE	147½ inches	IGNITION	High-tension magneto and storage battery
GAUGE	57 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	37 x 5 inches	LIGHTING SYSTEM	Electric
REAR TIRES	38 x 5½ inches	VOLTAGES	Six
SERVICE BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Four forward, one reverse
HORSEPOWER	60 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	5 x 7 inches	REAR AXLE	Semi-floating
		STEERING GEAR	Screw and nut

In addition to above specifications, price includes wind-
shield, speedometer, autometer, clock and demountable rims

**PIERCE-ARROW
MOTOR CAR
COMPANY**

**BUFFALO
NEW YORK**

Price	\$6000
Two-Passenger Runabout	5900
Three-Passenger Runabout	5900
Two-Passenger Coupe	6700
Three-Passenger Coupe	6700
Four-Passenger Touring	5900
Five-Passenger Touring	5900
Suburban	7000
Landau	7000
Brougham	6800
Suburban-Landau	7000
Vestibule Landau	7200
Vestibule Suburban	7200
Vestibule Brougham	6950
Vestibule Suburban-Landau	7200

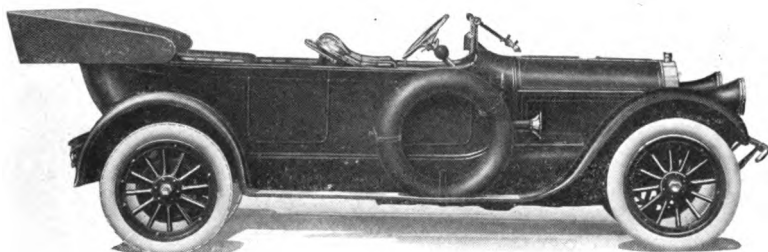


PIERCE-ARROW SEVEN-PASSENGER TOURING CAR—66-A-4

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water
POSITION OF DRIVER	Right side	IGNITION	High tension magneto and storage battery
WHEELBASE	147½ inches	STARTING SYSTEM	Two unit
GAUGE	57 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	38 x 5½ inches	WIRING SYSTEM	Single
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	60	REAR AXLE	Semi-floating
(N. A. C. C. Rating)		STEERING GEAR	Screw and nut
BORE AND STROKE	5 x 7 inches		
LUBRICATION	Force feed		

In addition to above specifications, price includes top, top hood, windshield, speedometer, autometer, clock and demountable rims

**SCRIPPS -
BOOTH
COMPANY**
DETROIT
MICHIGAN

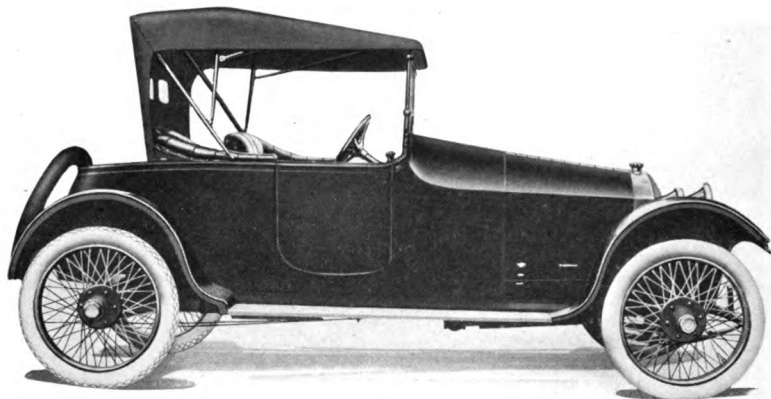


SCRIPPS-BOOTH ROADSTER—D

COLOR	Biscuit, gray or royal blue	LUBRICATION	Force feed
SEATING CAPACITY	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	110 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Double unit
WHEELS	Wire	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Eight	CLUTCH	Dry multiple disc
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	En bloc with crank case	GEAR CHANGES	Three forward
HORSEPOWER	22.05	DRIVE	Plain bevel
	(N. A. C. C. Rating)	REAR AXLE	Three-quarters floating
BORE AND STROKE	2 $\frac{5}{8}$ x 3 $\frac{3}{4}$ inches	STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable wheel

**GREAT WESTERN
AUTOMOBILE
COMPANY**
PERU, INDIANA

Price, \$1185

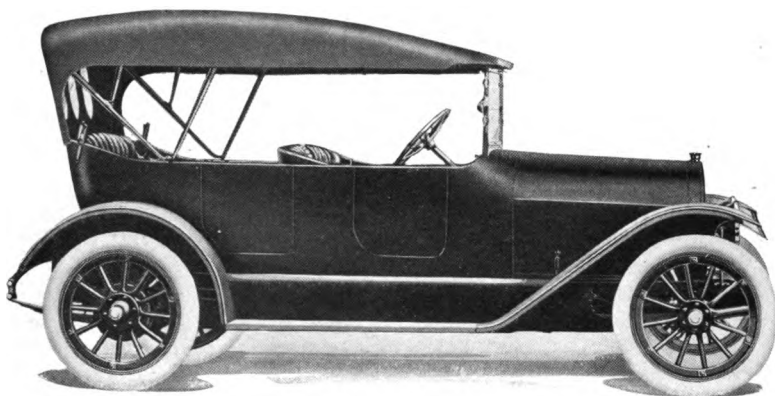


GREAT WESTERN 1916 TOURING CAR

COLOR	Black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	118 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	32 x 3½ or 33 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 3½ or 33 x 4 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	21.6 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 x 5 inches	REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rim

**VELIE MOTOR
VEHICLE
COMPANY
M O L I N E
I L L I N O I S**

Price \$1065
With winter top 1240
Two-Passenger Roadster 1045
Four-Passenger Coupe . 1750

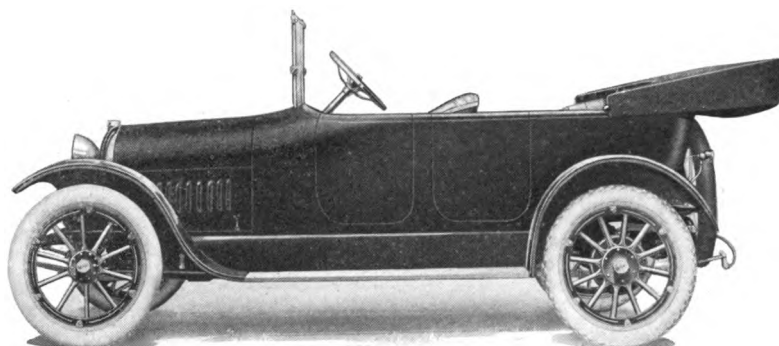

VELIE BILTWEL SIX—22


COLOR	Velie blue	RADIATOR	Cellular
SEATING CAPACITY .	Five persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	Storage battery
WHEELBASE	115 inches	STARTING SYSTEM .	Two unit
GAUGE	56 inches	STARTER OPERATED .	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM .	Electric
FRONT TIRES	32 x 4 inches	VOLTAGES	Six
REAR TIRES	32 x 4 inches, anti-skid	WIRING SYSTEM . .	Single
SERVICE BRAKE . .	Rear axle	GASOLINE SYSTEM .	Vacuum
EMERGENCY BRAKE .	Rear axle	CLUTCH	Dry multiple disc
CYLINDERS	Six	TRANSMISSION . . .	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . .	Three forward, one reverse
CAST	En bloc	DRIVE	Spiral bevel
HORSEPOWER	25.35 (N. A. C. C. Rating)	REAR AXLE	Three-quarters floating
BORE AND STROKE . .	3¼ x 4½ inches	STEERING GEAR . . .	Worm and gear
LUBRICATION	Force feed and splash		

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

WESTCOTT MOTOR CAR COMPANY

RICHMOND
INDIANA

Price \$1595
Three-Passenger Cloverleaf
Roadster 1595
Seven-Passenger Sedan . . 1945

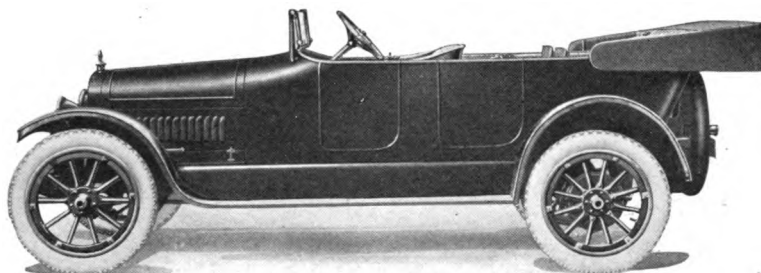


WESTCOTT TOURING CAR—51

COLOR	Dark green or dark gray	BORE AND STROKE . .	3 1/2 x 5 1/4 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	126 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	35 x 4 1/2 inches, anti-skid	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	35 x 4 1/2 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Six	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	29.4	GEAR CHANGES . . .	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR . . .	Worm and wheel

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**WESTCOTT
MOTOR CAR
COMPANY**
MANUFACTURED BY THE WESTCOTT MOTOR CAR COMPANY, RICHMOND, INDIANA
**RICHMOND
INDIANA**

Price	\$1445
Three-Passenger Cloverleaf Roadster	1445
Three-Passenger Cloverleaf Cabriolet	1745

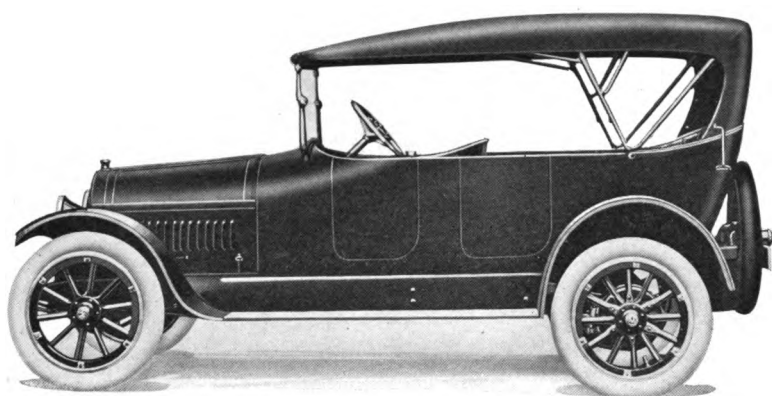

WESTCOTT TOURING CAR—42


COLOR	Dark green or dark gray	BORE AND STROKE	3½ x 5¼ inches
SEATING CAPACITY	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	121 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	34 x 4 inches, anti-skid	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	29.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**

**F L I N T
M I C H I G A N**

Price, \$750

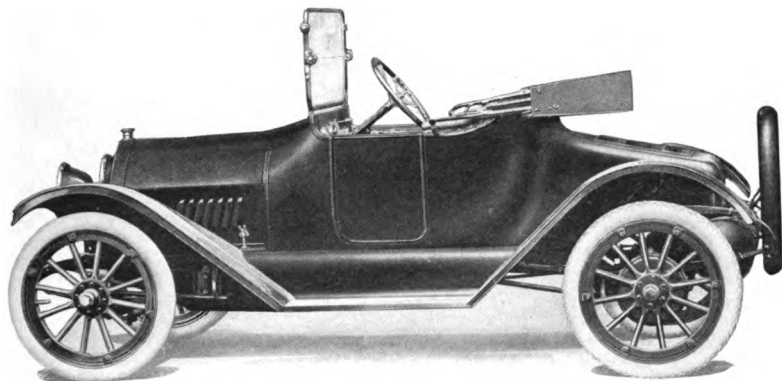

CHEVROLET ROYAL MAIL—TYPE H-2½


COLOR	Body and wheels, Chevrolet green; chassis and fenders, black	BORE AND STROKE	3½ x 4 inches
SEATING CAPACITY	Two persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3¼ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	32 x 3¼ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Rear wheel	VOLTAGES	Six
EMERGENCY BRAKE	Internal expanding	WIRING SYSTEM	Single; double on starting motor
CYLINDERS	Four	GASOLINE SYSTEM	Pressure
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.74 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top
hood, windshield, speedometer, ammeter and demountable rims

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**

**F L I N T
M I C H I G A N**

Price, \$750

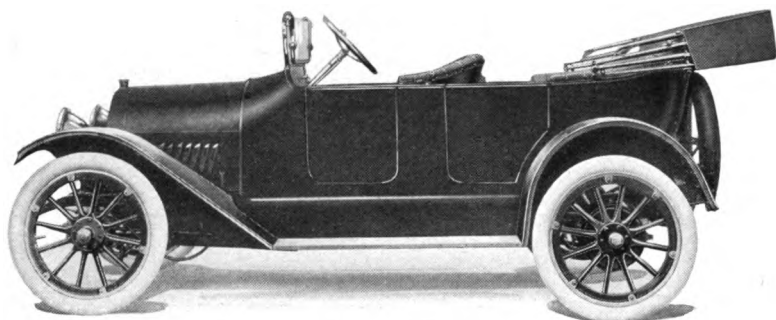

CHEVROLET BABY GRAND—TYPE H-4


COLOR	Body and wheels, Chevrolet green; chassis and fenders, black	BORE AND STROKE	3 $\frac{1}{2}$ x 4 inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with cir- culating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3 $\frac{1}{2}$ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	32 x 3 $\frac{1}{2}$ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Internal expand- ing	WIRING SYSTEM	Single; double on starting motor
CYLINDERS	Four	GASOLINE SYSTEM	Pressure
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.74 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top
hood, windshield, speedometer, ammeter and demountable rims

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**

**F L I N T
M I C H I G A N**

Price, \$750

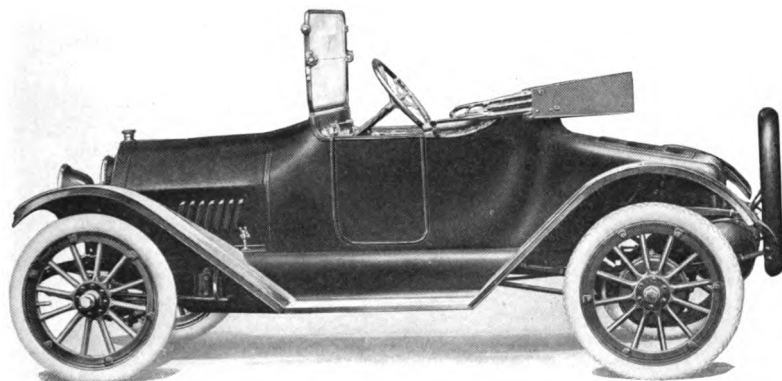


CHEVROLET ROYAL MAIL—TYPE H-2½

COLOR	Body and wheels, Chevrolet green; chassis and fenders, black	BORE AND STROKE . . .	3½ x 4 inches
SEATING CAPACITY . .	Two persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . . .	Single unit
FRONT TIRES	32 x 3½ inches	STARTER OPERATED . .	Gear to fly wheel
REAR TIRES	32 x 3½ inches, anti-skid	LIGHTING SYSTEM . . .	Electric
SERVICE BRAKE	Rear wheel	VOLTAGES	Six
EMERGENCY BRAKE . .	Internal expanding	WIRING SYSTEM	Single; double on starting motor
CYLINDERS	Four	GASOLINE SYSTEM . . .	Pressure
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.74 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**
**F L I N T
M I C H I G A N**

Price. \$750

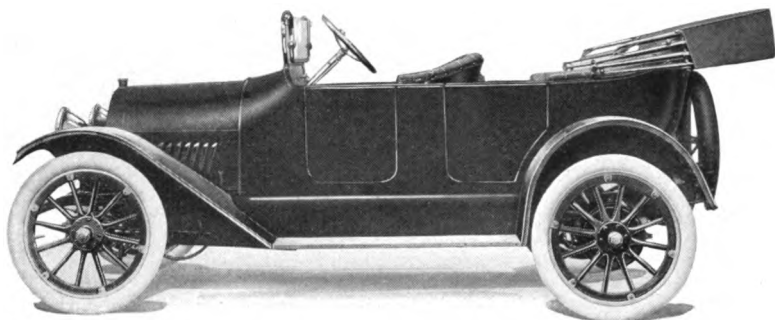

CHEVROLET BABY GRAND—TYPE H-4


COLOR	Body and wheels, Chevrolet green; chassis and fenders, black	BORE AND STROKE	3½ x 4 inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3½ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	32 x 3½ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Internal expanding	WIRING SYSTEM	Single; double on starting motor
CYLINDERS	Four	GASOLINE SYSTEM	Pressure
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.74 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**

**F L I N T
M I C H I G A N**

Price \$490
With Electric Lighting and
Starting 550

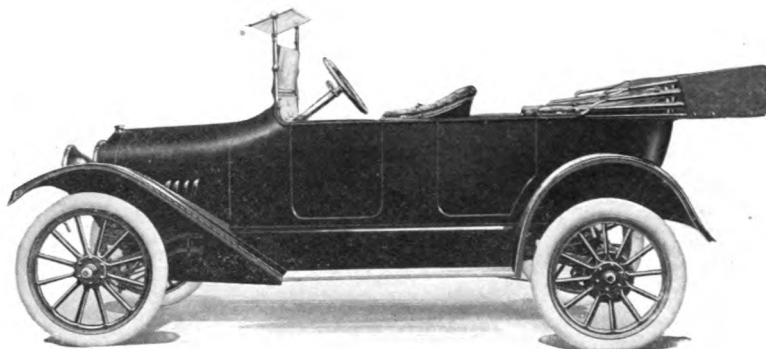

CHEVROLET FOUR NINETY—TYPE 490


COLOR	Ebony black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY . .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER .	Left side	COOLING	Thermo-syphon
WHEELBASE	102 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	30 x 3 inches	LIGHTING SYSTEM . .	Gas
REAR TIRES	30 x 3½ inches	GASOLINE SYSTEM . .	Gravity
SERVICE BRAKE . . .	Rear wheels	CLUTCH	Cone
EMERGENCY BRAKE . .	Internal expanding	TRANSMISSION . . .	Selective sliding
CYLINDERS	Four	GEAR CHANGES . . .	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Plain bevel
CAST	En bloc	REAR AXLE	Three-quarters floating
HORSEPOWER	21.74 (N. A. C. Rating)	STEERING GEAR . . .	Spur gears and sector
BORE AND STROKE . .	3½ x 4 inches		

In addition to above specifications, price includes top, top hood and windshield

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**

**F L I N T
M I C H I G A N**

Price. \$750

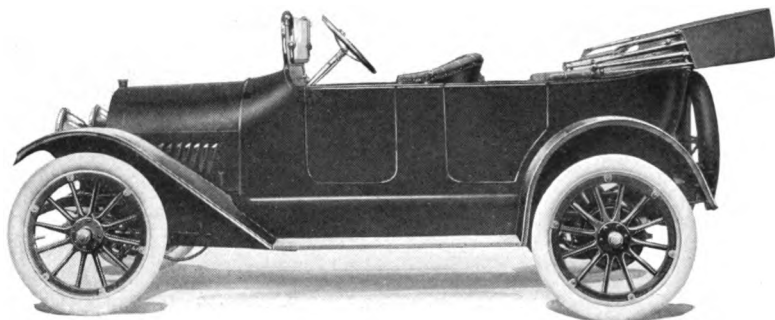

CHEVROLET BABY GRAND—TYPE H-4


COLOR	Body and wheels, Chevrolet green; chassis and fenders, black	BORE AND STROKE	3 $\frac{1}{2}$ x 4 inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3 $\frac{1}{2}$ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	32 x 3 $\frac{1}{2}$ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Internal expanding	WIRING SYSTEM	Single; double on starting motor
CYLINDERS	Four	GASOLINE SYSTEM	Pressure
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.74	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

**CHEVROLET
MOTOR
COMPANY
OF MICHIGAN**

**F L I N T
M I C H I G A N**

Price \$490
With Electric Lighting and
Starting 550

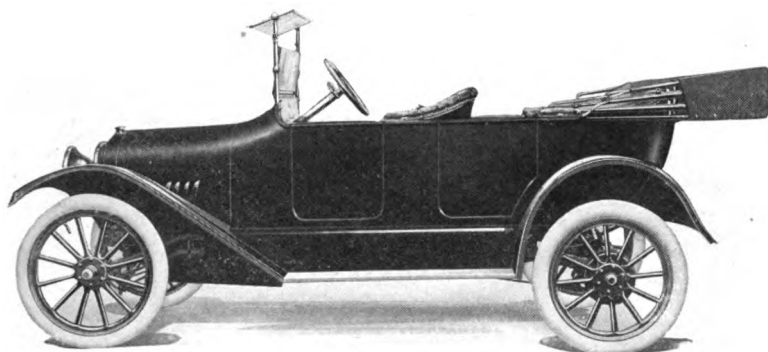

CHEVROLET FOUR NINETY—TYPE 490


COLOR	Ebony black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	102 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	30 x 3 inches	LIGHTING SYSTEM	Gas
REAR TIRES	30 x 3½ inches	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Rear wheels	CLUTCH	Cone
EMERGENCY BRAKE	Internal expanding	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Plain bevel
CAST	En bloc	REAR AXLE	Three-quarters floating
HORSEPOWER	21.74 (N. A. C. C. Rating)	STEERING GEAR	Spur gears and sector
BORE AND STROKE	3½ x 4 inches		

In addition to above specifications, price includes top, top hood and windshield

**W. A. PATERSON
COMPANY**

**F L I N T
M I C H I G A N**

Price \$985
Seven-Passenger . 1060

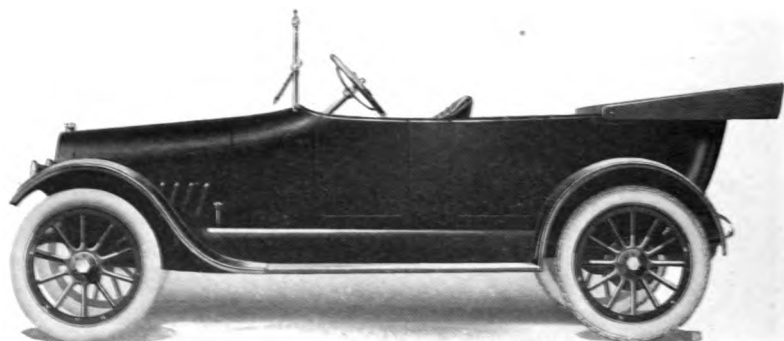

PATERSON TOURING CAR—4-42


COLOR	Blue	LUBRICATION	Force feed and splash
SEATING CAPACITY	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	117 inches	IGNITION	Delco distributor and storage battery
GAUGE	36 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward
HORSEPOWER	23.35 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 $\frac{1}{4}$ x 4 $\frac{1}{2}$ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**CADILLAC
MOTOR CAR
COMPANY**

**DETROIT
MICHIGAN**

Price, \$2080

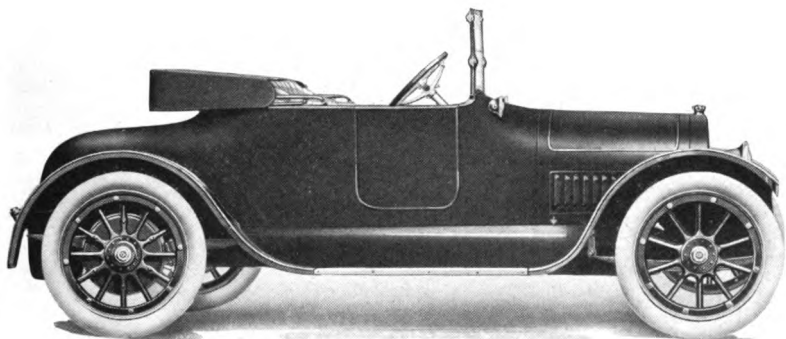


CADILLAC ROADSTER—TYPE 53

COLOR	Royal green	LUBRICATION	Force feed
SEATING CAPACITY . .	Two persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Generator and storage battery
GAUGE	56 or 61 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Pressure
CYLINDERS	Eight	CLUTCH	Dry multiple disc
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES . . .	Three forward and reverse
HORSEPOWER	31.25 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3⅞ x 5⅞ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**W. A. PATERSON
C O M P A N Y**
**F L I N T
M I C H I G A N**

Price \$985
Seven-Passenger . 1060

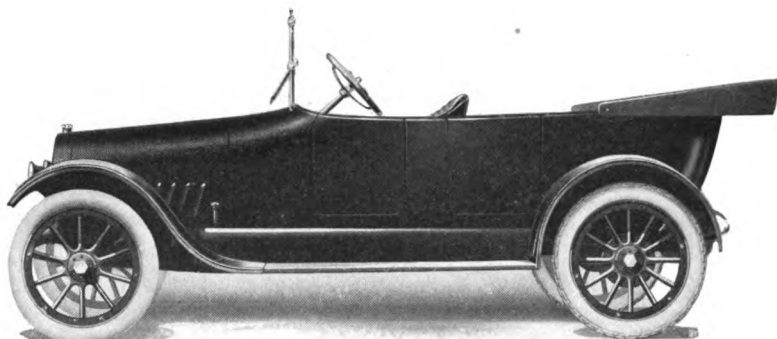

PATERSON TOURING CAR—6-42


COLOR	Blue	LUBRICATION	Force feed and splash
SEATING CAPACITY	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	117 inches	IGNITION	Delco distributor and storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward
HORSEPOWER	25.35 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3¼ x 4¼ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

CADILLAC MOTOR CAR COMPANY

DETROIT
MICHIGAN

Price, \$2080

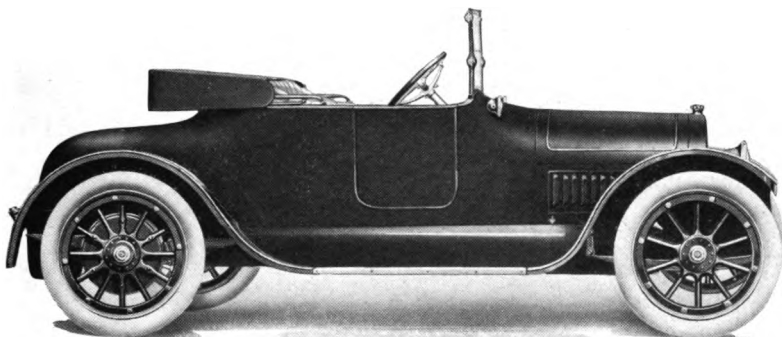

CADILLAC ROADSTER—TYPE 53


COLOR	Royal green	LUBRICATION	Force feed
SEATING CAPACITY . .	Two persons	RADIATOR	Tubular
POSITION OF DRIVER .	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Generator and storage battery
GAUGE	56 or 61 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE . .	Expanding on rear wheels	GASOLINE SYSTEM . .	Pressure
CYLINDERS	Eight	CLUTCH	Dry multiple disc
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES . . .	Three forward and reverse
HORSEPOWER	31.25 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE . .	3½ x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

CADILLAC MOTOR CAR COMPANY

DETROIT
MICHIGAN

Price . . \$2400
Coupe . 2800

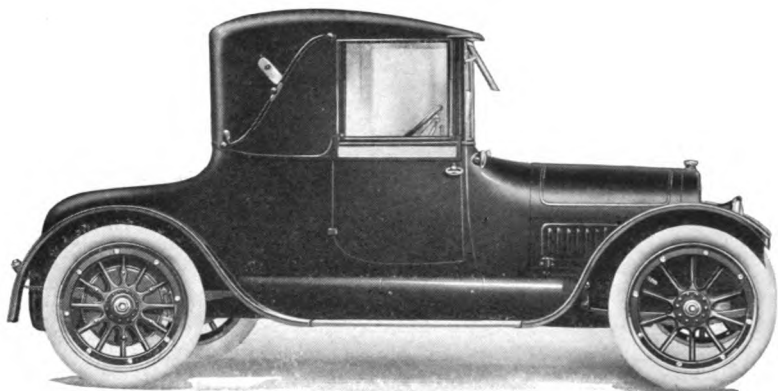


CADILLAC VICTORIA—TYPE 53

COLOR	Calumet green and black	BORE AND STROKE	3¼ x 5¼ inches
SEATING CAPACITY	Three persons	LUBRICATION	Force feed circulating
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	122 inches	COOLING	Water pump
GAUGE	56 or 61 inches	IGNITION	Generator and storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	36 x 4½ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	36 x 4½ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Eight	GASOLINE SYSTEM	Pressure
ARRANGED	V type, 90 degrees	CLUTCH	Dry multiple disc
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	31.25 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top hood, windshield, speedometer, ammeter, clock and demountable rims

**CADILLAC
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price \$2080
Five-Passenger Salon . . 2080

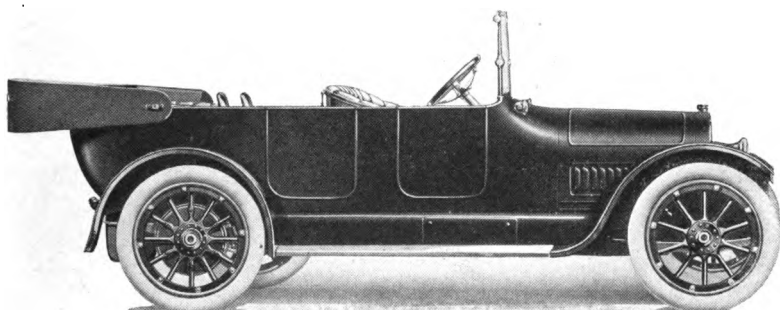

CADILLAC SEVEN-PASSENGER CAR—TYPE 53


COLOR	Royal green	RADIATOR	Tubular
SEATING CAPACITY	Seven persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	Generator and storage battery
WHEELBASE	122 inches	STARTING SYSTEM	Single unit
GAUGE	56 or 61 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	36 x 4½ inches	VOLTAGES	Six
REAR TIRES	36 x 4½ inches, anti-skid	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Eight	TRANSMISSION	Selective sliding
ARRANGED	V-type, 90 degrees	GEAR CHANGES	Three forward and reverse
CAST	In fours	DRIVE	Spiral bevel
HORSEPOWER	31.25 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE	3½ x 5½ inches	STEERING GEAR	Worm and sector
LUBRICATION	Force feed		

In addition to above specifications, price includes top, top hood windshield, speedometer, ammeter, clock and demountable rims

**CADILLAC
MOTOR CAR
COMPANY**

**DETROIT
MICHIGAN**

**Price . . \$2400
Coupe . 2800**

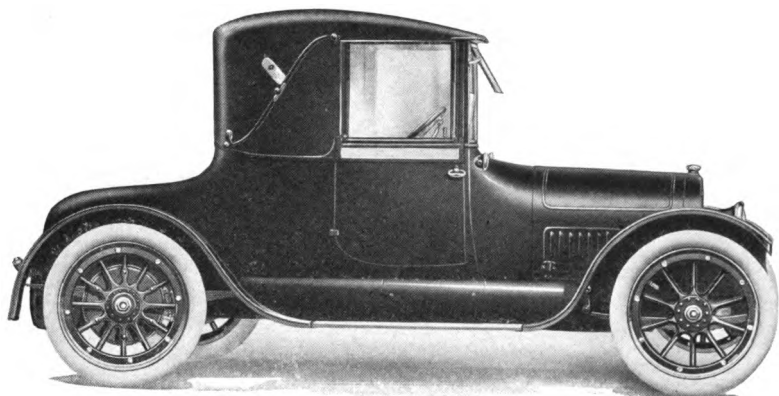

CADILLAC VICTORIA—TYPE 53


COLOR	Calumet green and black	BORE AND STROKE	3½ x 5½ inches
SEATING CAPACITY	Three persons	LUBRICATION	Force feed circulating
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	122 inches	COOLING	Water pump
GAUGE	56 or 61 inches	IGNITION	Generator and storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	36 x 4½ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	36 x 4½ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Eight	GASOLINE SYSTEM	Pressure
ARRANGED	V type, 90 degrees	CLUTCH	Dry multiple disc
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	31.25	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top hood, windshield, speedometer, ammeter, clock and demountable rims

**CADILLAC
MOTOR CAR
COMPANY**

**DETROIT
MICHIGAN**


Price \$2080
Five-Passenger Salon . . 2080

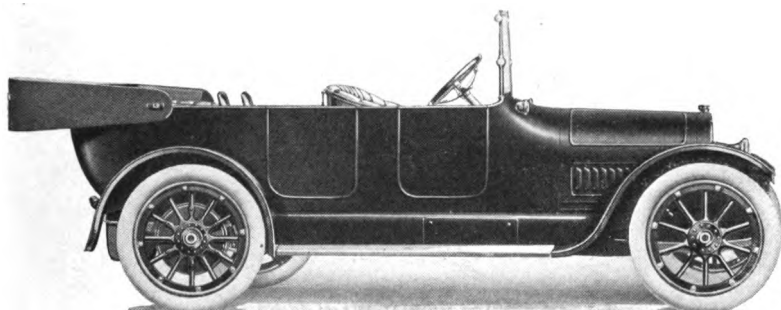

CADILLAC SEVEN-PASSENGER CAR—TYPE 53

COLOR	Royal green	RADIATOR	Tubular
SEATING CAPACITY . .	Seven persons	COOLING	Water pump
POSITION OF DRIVER .	Left side	IGNITION	Generator and storage battery
WHEELBASE	122 inches	STARTING SYSTEM . .	Single unit
GAUGE	56 or 61 inches	STARTER OPERATED .	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM . .	Electric
FRONT TIRES	36 x 4½ inches	VOLTAGES	Six
REAR TIRES	36 x 4½ inches, anti-skid	WIRING SYSTEM . . .	Single
SERVICE BRAKE . . .	Contracting on rear wheels	GASOLINE SYSTEM . .	Pressure
EMERGENCY BRAKE . .	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Eight	TRANSMISSION	Selective sliding
ARRANGED	V-type, 90 degrees	GEAR CHANGES . . .	Three forward and reverse
CAST	In fours	DRIVE	Spiral bevel
HORSEPOWER	31.25 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE . .	3½ x 5½ inches	STEERING GEAR . . .	Worm and sector
LUBRICATION	Force feed		

In addition to above specifications, price includes top, top hood windshield, speedometer, ammeter, clock and demountable rims

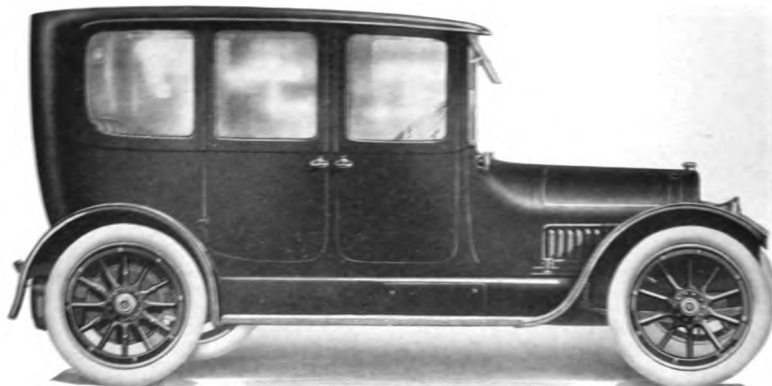


CADILLAC BROUGHAM—TYPE 53

COLOR	Calumet green and black	LUBRICATION	Force feed circulating
SEATING CAPACITY	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Generator and storage battery
GAUGE	56 or 61 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Eight	CLUTCH	Dry multiple disc
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	31.25 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3½ x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes wind-shield, speedometer, ammeter, clock and demountable rims

**CADILLAC
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN


Price . . \$3450
Berlin . . 3600

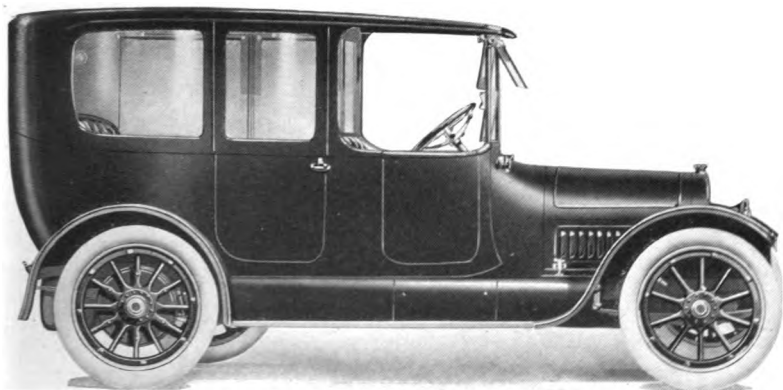

CADILLAC LIMOUSINE—TYPE 53

COLOR	Calumet green and black	BORE AND STROKE . .	3¼ x 5¼ inches
SEATING CAPACITY . .	Seven persons	LUBRICATION	Force feed
POSITION OF DRIVER .	Left side	RADIATOR	Tubular
WHEELBASE	122 inches	COOLING	Water pump
GAUGE	56 or 61 inches	IGNITION	Generator and storage battery
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	36 x 4½ inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	36 x 4½ inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE . .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Eight	GASOLINE SYSTEM . .	Pressure
ARRANGED	V type, 90 degrees	CLUTCH	Dry multiple disc
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	31.25 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward and reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and sector

In addition to above specifications, price includes wind-shield, speedometer, ammeter, clock and demountable rims

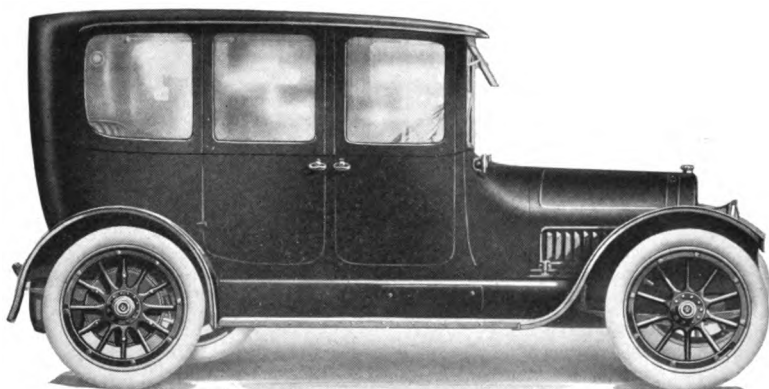


CADILLAC BROUGHAM—TYPE 53

COLOR	Calumet green and black	LUBRICATION	Force feed circulating
SEATING CAPACITY	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Generator and storage battery
GAUGE	56 or 61 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Eight	CLUTCH	Dry multiple disc
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	31.25	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE	3¼ x 5½ inches	STEERING GEAR	Worm and sector

In addition to above specifications, price includes wind-shield, speedometer, ammeter, clock and demountable rims

**CADILLAC
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**


**Price . . \$3450
Berlin . 3600**

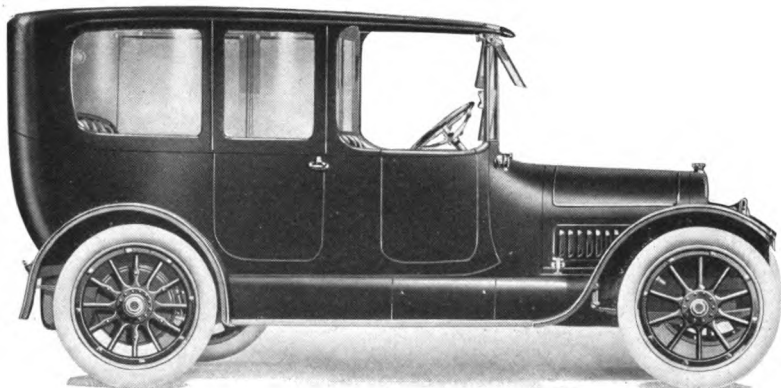

CADILLAC LIMOUSINE—TYPE 53

COLOR	Calumet green and black	BORE AND STROKE . .	3 $\frac{3}{4}$ x 5 $\frac{1}{2}$ inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	122 inches	COOLING	Water pump
GAUGE	56 or 61 inches	IGNITION	Generator and storage battery
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	36 x 4 $\frac{1}{2}$ inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	36 x 4 $\frac{1}{2}$ inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Eight	GASOLINE SYSTEM . .	Pressure
ARRANGED	V type, 90 degrees	CLUTCH	Dry multiple disc
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	31.25 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward and reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes wind-shield, speedometer, ammeter, clock and demountable rims

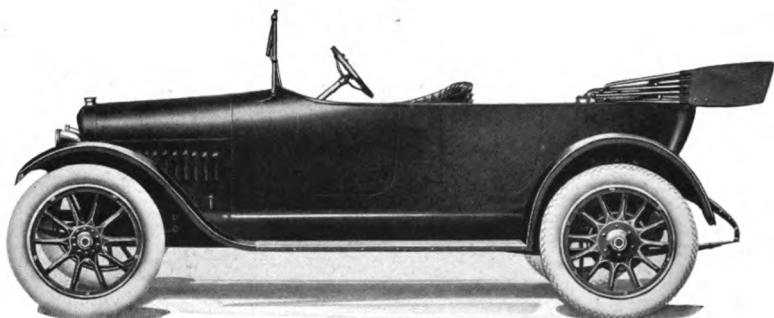


ALLEN TOURING CAR—37

COLOR	Body, olive green; running gear, black	BORE AND STROKE . .	3¼ x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Splash with cir- culating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	112 inches	COOLING	Water
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	32 x 3½ inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	32 x 3½ inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Four	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	22.5	GEAR CHANGES . . .	Three
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top
hood, windshield, speedometer, ammeter and demountable rims

**MAXWELL
MOTOR COM-
PANY, Inc.
DETROIT
MICHIGAN**

Price	\$655
Roadster . .	635
Cabriolet . .	865
Sedan . . .	935
Town Car . .	915

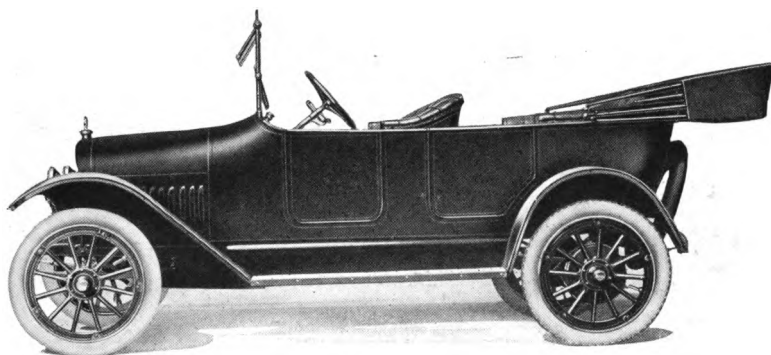

MAXWELL TOURING CAR


COLOR	Black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	103 inches	IGNITION	High-tension magneto
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	30 x 3½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	30 x 3½ inches, anti-skid	VOLTAGES	Lighting, six; starting, twelve
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Cone in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward
HORSEPOWER	21.03 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	3½ x 4½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

ALLEN MOTOR C O M P A N Y

FOSTORIA, OHIO

Price . . . \$795
Roadster . 795

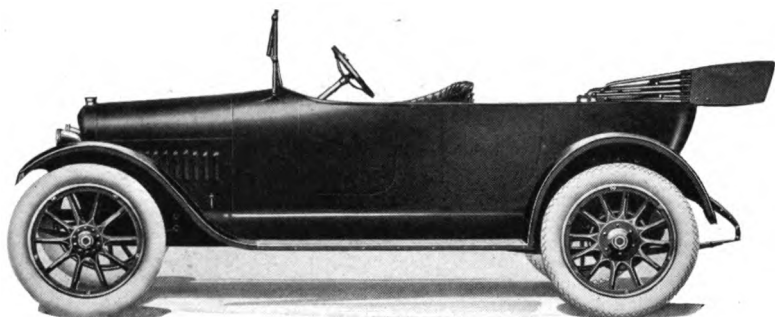

ALLEN TOURING CAR—37


COLOR	Body, olive green; running gear, black	BORE AND STROKE . .	3¼ x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	112 inches	COOLING	Water
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	32 x 3½ inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	32 x 3½ inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Four	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	22.5 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three
		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**MAXWELL
MOTOR COM-
PANY, Inc.**

**DETROIT
MICHIGAN**

Price	\$655
Roadster . .	635
Cabriolet . .	865
Sedan . . .	935
Town Car . .	915

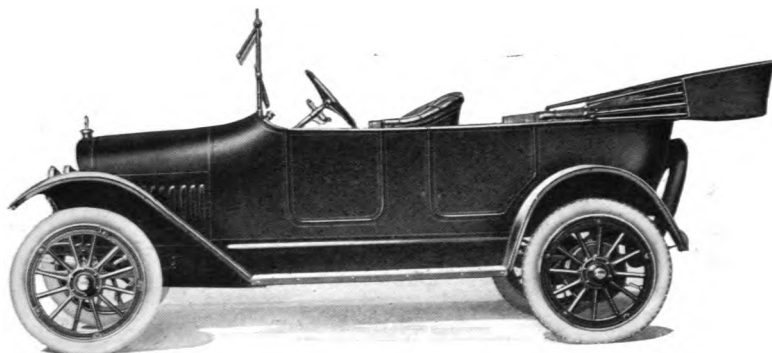


MAXWELL TOURING CAR

COLOR	Black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	103 inches	IGNITION	High-tension magneto
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	30 x 3½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	30 x 3½ inches, anti-skid	VOLTAGES	Lighting, six; starting, twelve
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Cone in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward
HORSEPOWER	21.03 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE . .	3½ x 4½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**M O L I N E
A U T O M O B I L E
C O M P A N Y**
**E A S T M O L I N E
I L L I N O I S**

Price \$2500
Roadster 2500
Limousine 3800
Sedan 3250

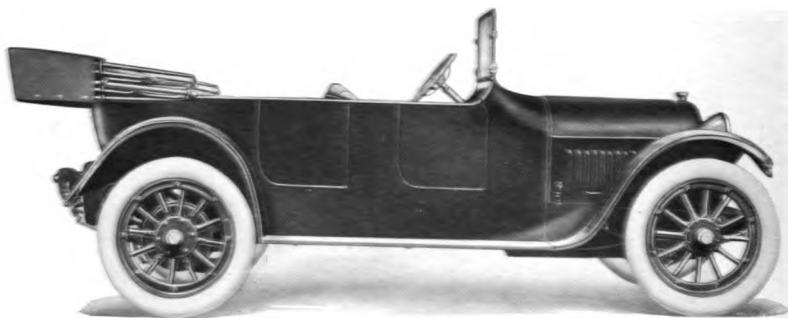

MOLINE-KNIGHT TOURING CAR—50


COLOR	Blue-black with gray striping	LUBRICATION	Force feed
SEATING CAPACITY	Seven persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	128 inches	IGNITION	High-tension magneto and dry batteries
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4 $\frac{1}{2}$ inches	LIGHTING SYSTEM	Electric
REAR TIRES	36 x 4 $\frac{1}{2}$ inches, anti-skid	VOLTAGES	Starting, twelve; lighting, six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Four
HORSEPOWER	25.6 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	4 x 6 inches	REAR AXLE	Full floating
		STEERING GEAR	Screw and nut

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**M O L I N E
AUTOMOBILE
C O M P A N Y**

**EAST MOLINE
I L L I N O I S**

Price . . . \$1450
Roadster . 1450

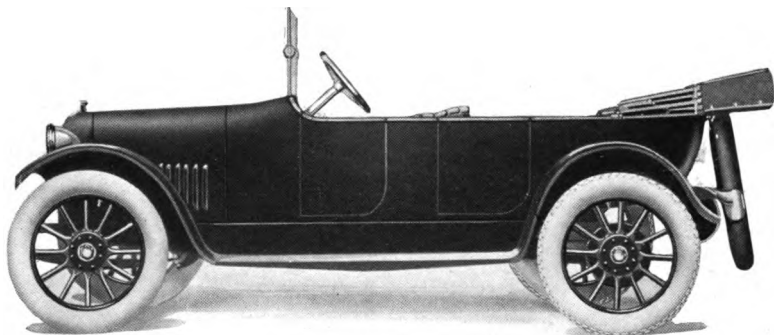

MOLINE-KNIGHT TOURING CAR—40


COLOR	Auto green and black with gold striping	BORE AND STROKE	3¼ x 5 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	RADIATOR	Tubular
Wheel base	118 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	High tension battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	22.5 (N. A. C. C. Rating)	GEAR CHANGES	Three
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**MITCHELL-
LEWIS MOTOR
COMPANY**

**R A C I N E
W I S C O N S I N**

Price \$1250
Three-Passenger . . . 1250
Seven-Passenger . . . 1285

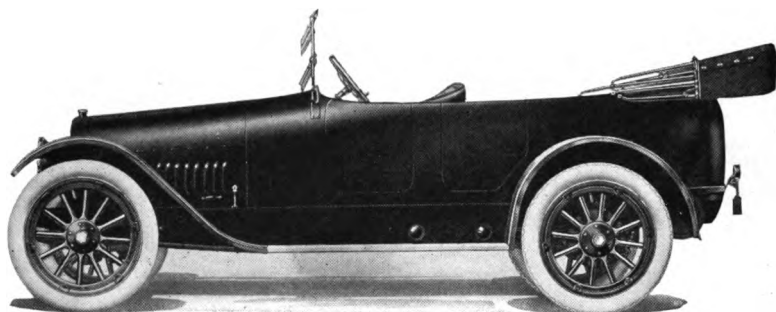


MITCHELL—THE SIX OF '16

COLOR	Body, dark Mitchell blue; running gear, black	BORE AND STROKE . .	3½ x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Pump over and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	125 inches	COOLING	Water pump
GAUGE	56 or 60 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Chain to crank shaft
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Lighting, six; starting, twelve
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Six	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	29.4 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood,
windshield, speedometer, ammeter, voltmeter and demountable rims

**NATIONAL
MOTOR
VEHICLE
COMPANY**
INDIANAPOLIS
INDIANA

Price	\$1990
Four-Passenger Touring	1990
Six-Passenger Touring	2020
Three-Passenger Roadster	1990
Four Passenger Coupe	2650
Five-Passenger Sedan	3200

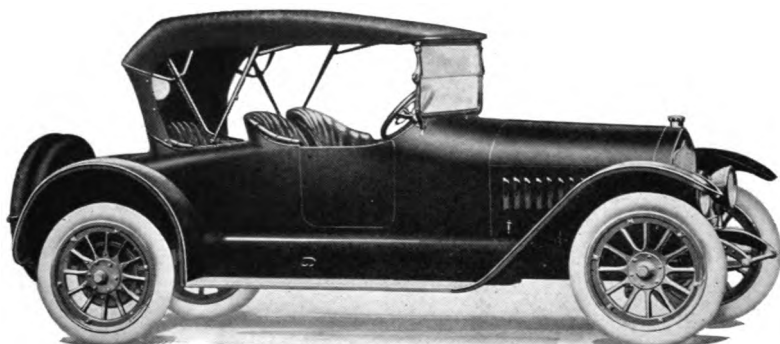

NATIONAL HIGHWAY TWELVE


COLOR	National dark blue	LUBRICATION	Full force feed
SEATING CAPACITY	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	128 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	36 x 4½ inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Twelve	CLUTCH	Cone
ARRANGED	V-type, 60 degrees	TRANSMISSION	Selective sliding
CAST	In sixes	GEAR CHANGES	Three forward
HORSEPOWER	36.3 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	2¾ x 4¾ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

NATIONAL MOTOR VEHICLE COMPANY

INDIANAPOLIS
INDIANA

Price	\$1690
Six-Passenger Touring	1720
Three-Passenger Roadster . .	1690
Four-Passenger Coupe	2350
Five-Passenger Sedan	2900

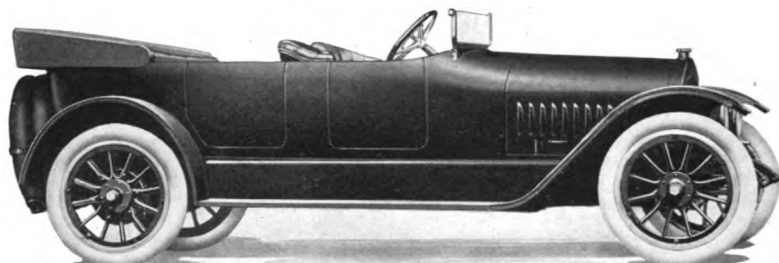


NATIONAL HIGHWAY SIX

COLOR	National dark blue	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Four persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	128 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches	VOLTAGES	Six
SERVICE BRAKE . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward
HORSEPOWER	29.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3½ x 5¼ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**NATIONAL
MOTOR
VEHICLE
COMPANY**
INDIANAPOLIS
INDIANA

Price	\$2500
Four-Passenger Touring	2375
Five-Passenger Touring	2375
Seven-Passenger Touring	2400
Three-Passenger Roadster	2375
Four-Passenger Coupe	2850
Five-Passenger Sedan	3400

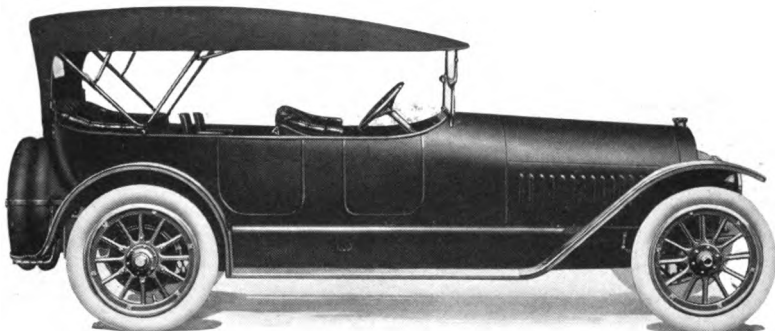

NATIONAL NEWPORT SIX


COLOR	Optional	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Six persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	37 x 5 inches	LIGHTING SYSTEM	Electric
REAR TIRES	37 x 5 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward
HORSEPOWER	33.75 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3 $\frac{3}{4}$ x 5 $\frac{1}{2}$ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

NATIONAL MOTOR VEHICLE COMPANY

INDIANAPOLIS
INDIANA

Price	\$1690
Six-Passenger Touring	1720
Three-Passenger Roadster . . .	1690
Four-Passenger Coupe	2350
Five-Passenger Sedan	2900

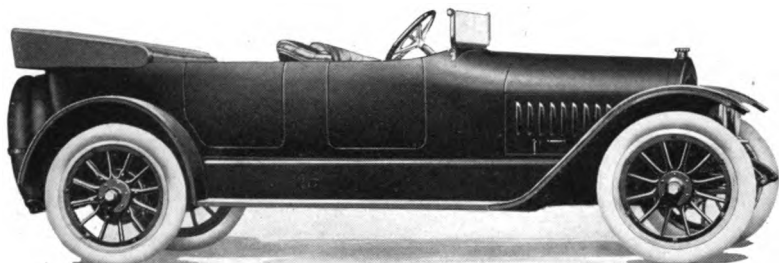


NATIONAL HIGHWAY SIX

COLOR	National dark blue	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Four persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	128 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches	VOLTAGES	Six
SERVICE BRAKE . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward
HORSEPOWER	29.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3½ x 5¼ inches	REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**NATIONAL
MOTOR
VEHICLE
COMPANY**
INDIANAPOLIS
INDIANA

Price	\$2500
Four-Passenger Touring	2375
Five-Passenger Touring	2375
Seven-Passenger Touring	2400
Three-Passenger Roadster	2375
Four-Passenger Coupe	2850
Five-Passenger Sedan	3400

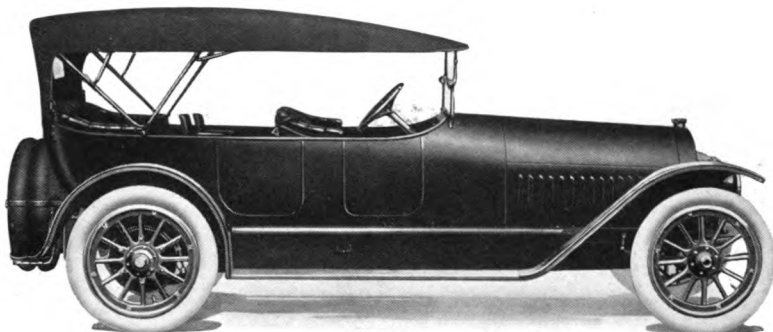

NATIONAL NEWPORT SIX


COLOR	Optional	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Six persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	37 x 5 inches	LIGHTING SYSTEM	Electric
REAR TIRES	37 x 5 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward
HORSEPOWER	33.75 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3¼ x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

MOON MOTOR CAR COMPANY

ST. LOUIS
MISSOURI

Price . . . \$1195
Roadster . 1195

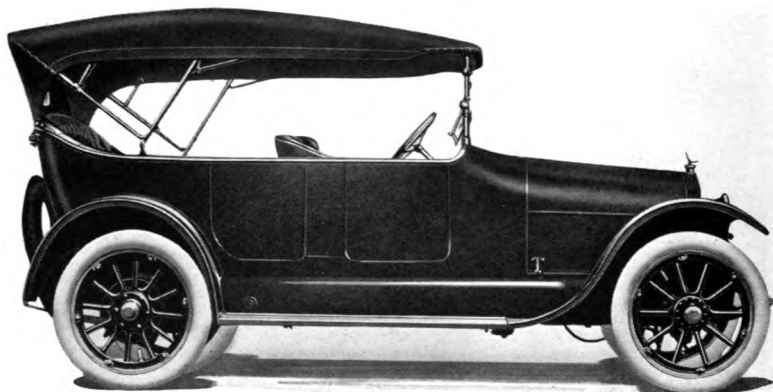


MOON TOURING CAR—6-30

COLOR	Black or Brewster green	BORE AND STROKE	3¼ x 4¼ inches .
SEATING CAPACITY	Five persons	LUBRICATION	Pump over and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	118 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	33 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	25.35 (N. A. C. C. Rating)	GEAR CHANGES	Three and reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

F. I. A. T.
POUGHKEEPSIE
NEW YORK

Price \$4850
Limousine . . . 5850
Landaulet . . . 5950
Runabout . . . 4850

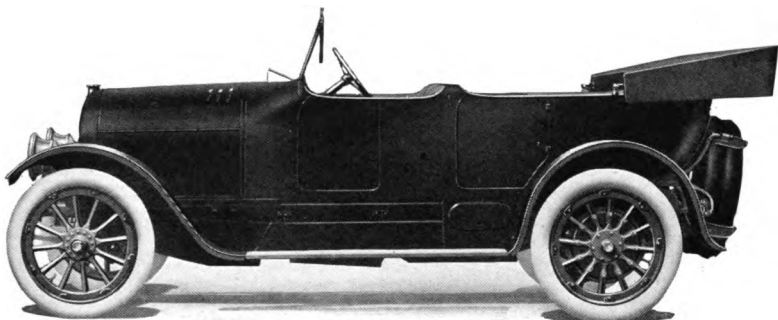


F. I. A. T. RIVIERA—55

COLOR	F. I. A. T. blue, green, maroon or gray	BORE AND STROKE . .	5¼ x 6¾ inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Full-force feed
POSITION OF DRIVER.	Right side	RADIATOR	Honeycomb
WHEELBASE	128 inches	COOLING	Water pump
GAUGE.	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	36 x 4½ inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	37 x 5 inches	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Four	GASOLINE SYSTEM . .	Pressure
ARRANGED	Vertically	CLUTCH	Multiple disc
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	42.03 (N. A. C. C. Rating)	GEAR CHANGES . . .	Four forward one reverse
		DRIVE	Plain bevel
		REAR AXLE.	Semi-floating
		STEERING GEAR. . . .	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**PULLMAN
MOTOR CAR
COMPANY**
MANUFACTURERS OF AUTOMOBILES
YORK, PA


Price	\$740
Two-Passenger Roadster . .	740
Three-Passenger Roadster . .	740
Coupe	990

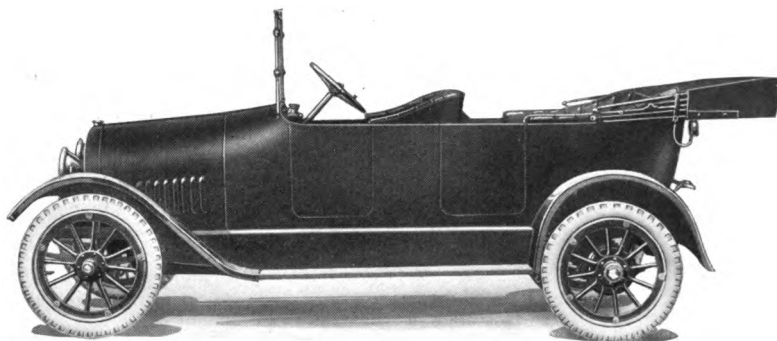

PULLMAN 1916 FOUR

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY . .	Five persons	COOLING	Thermo-syphon
POSITION OF DRIVER .	Left side	IGNITION	High-tension magneto
WHEELBASE	114 inches	STARTING SYSTEM . .	Single unit
GAUGE	56 inches	STARTER OPERATED .	Chain to crank shaft
WHEELS	Wood	LIGHTING SYSTEM . .	Electric
FRONT TIRES	31 x 4 inches, anti-skid	VOLTAGES	Starting, twelve; lighting, six
REAR TIRES	31 x 4 inches, anti-skid	WIRING SYSTEM . . .	Single
SERVICE BRAKE . . .	Contracting on rear wheels	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE . .	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDER	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Three forward, one reverse
CAST	En bloc	DRIVE	Plain bevel
HORSEPOWER	22.5	REAR AXLE	Full floating
(N. A. C. C. Rating)		STEERING GEAR	Worm and wheel
BORE AND STROKE . .	3¼ x 4¼ inches		
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

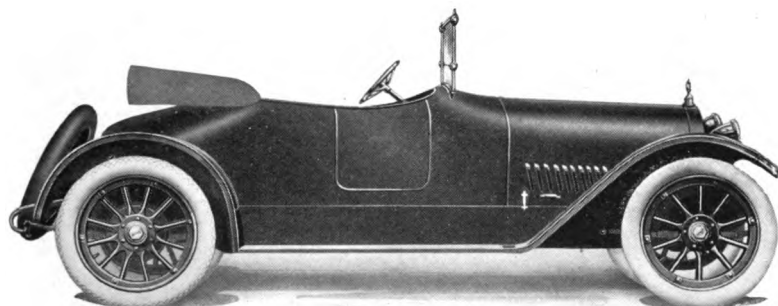

HAYNES ROADSTER—34


COLOR	Body, Brewster green; chassis, hood and fenders, black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	121 inches	IGNITION	Generator and storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	29.4 (N. A. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3½ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR	Full worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, clock and demountable rims

**PULLMAN
MOTOR CAR
COMPANY**

YORK, PA


Price	\$740
Two-Passenger Roadster . . .	740
Three-Passenger Roadster . .	740
Coupe	990

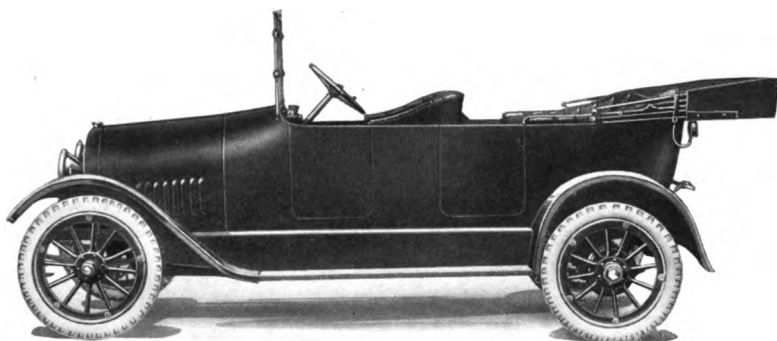

PULLMAN 1916 FOUR

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY . . .	Five persons	COOLING	Thermo-syphon
POSITION OF DRIVER . .	Left side	IGNITION	High-tension magneto
WHEELBASE	114 inches	STARTING SYSTEM . . .	Single unit
GAUGE	56 inches	STARTER OPERATED . .	Chain to crank shaft
WHEELS	Wood	LIGHTING SYSTEM . . .	Electric
FRONT TIRES	31 x 4 inches, anti-skid	VOLTAGES	Starting, twelve; lighting, six
REAR TIRES	31 x 4 inches, anti-skid	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM . . .	Gravity
EMERGENCY BRAKE . . .	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDER	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
CAST	En bloc	DRIVE	Plain bevel
HORSEPOWER	22.5 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE . . .	3¾ x 4¼ inches	STEERING GEAR	Worm and wheel
LUBRICATION	Splash with cir- culating pump		

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter, clock and demountable rims

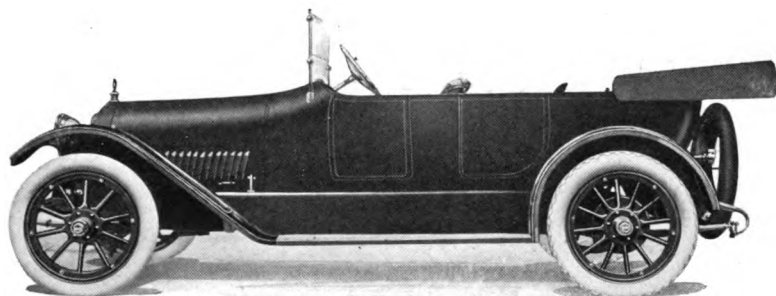

HAYNES KOKOMO SIX—35

COLOR	Body, Brewster green; chassis, hood and fenders, black.	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER.	Left side	COOLING	Water pump
WHEELBASE	127 inches	IGNITION	Generator and storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Chain to crankshaft
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	29.4	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE . .	3½ x 5 inches	STEERING GEAR . . .	Full worm


In addition to above specifications, price includes top, top hood, windshield, speedometer, clock and demountable rims

**PULLMAN
MOTOR CAR
COMPANY**

NEW YORK, N. Y. 10017

Y O R K , P A

Price	\$740
Two-Passenger Roadster . .	740
Three-Passenger Roadster . .	740
Coupe	990

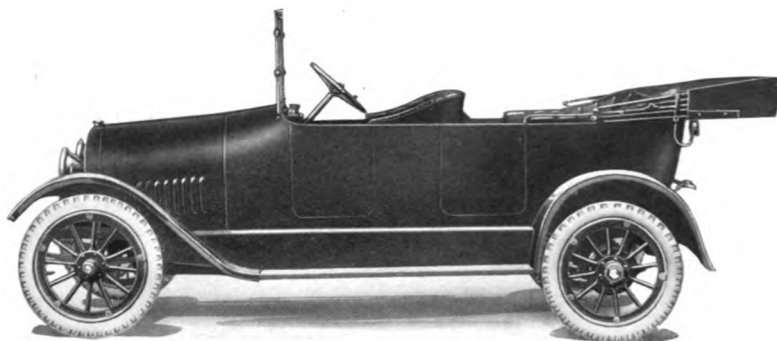

PULLMAN 1916 FOUR


COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY . .	Five persons	COOLING	Thermo-syphon
POSITION OF DRIVER .	Left side	IGNITION	High-tension magneto
WHEELBASE	114 inches	STARTING SYSTEM . .	Single unit
GAUGE	56 inches	STARTER OPERATED .	Chain to crank shaft
WHEELS	Wood	LIGHTING SYSTEM . .	Electric
FRONT TIRES	31 x 4 inches, anti-skid	VOLTAGES	Starting, twelve; lighting, six
REAR TIRES	31 x 4 inches, anti-skid	WIRING SYSTEM . . .	Single
SERVICE BRAKE . . .	Contracting on rear wheels	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE . .	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDER	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Three forward, one reverse
CAST	En bloc	DRIVE	Plain bevel
HORSEPOWER	22.5 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE . .	3¼ x 4¼ inches	STEERING GEAR	Worm and wheel
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

HAYNES AUTOMOBILE COMPANY

K O K O M O
I N D I A N A

Price, \$1485

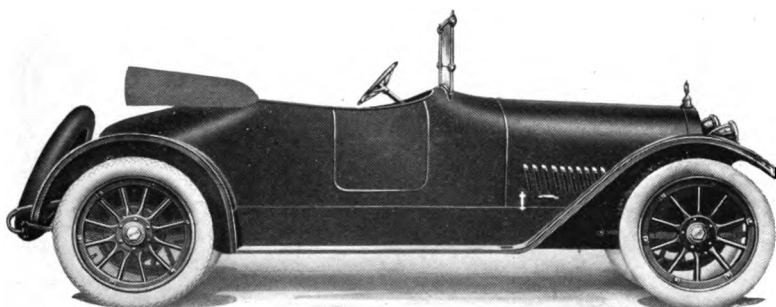


HAYNES ROADSTER—34

COLOR	Body, Brewster green; chassis, hood and fenders, black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	121 inches	IGNITION	Generator and storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	29.4	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE	3½ x 5 inches	STEERING GEAR	Full worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, clock and demountable rims

**H A Y N E S
A U T O M O B I L E
C O M P A N Y
K O K O M O
I N D I A N A**


Price, \$1385

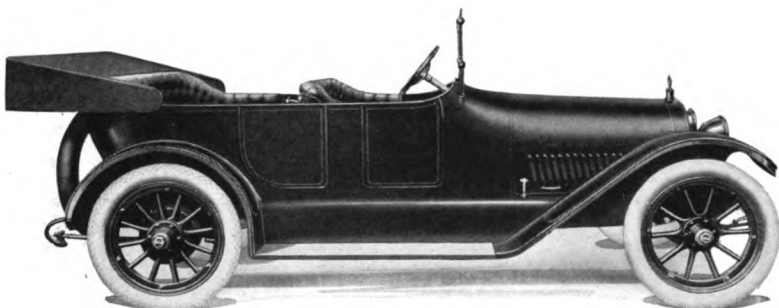

HAYNES LIGHT SIX—34

COLOR	Body, Brewster green; chassis, hood and fenders, black.	BORE AND STROKE . .	3½ x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	121 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Generator and storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Chain to crank shaft
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Expanding on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Six	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	29.4 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Full worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, clock and demountable rims

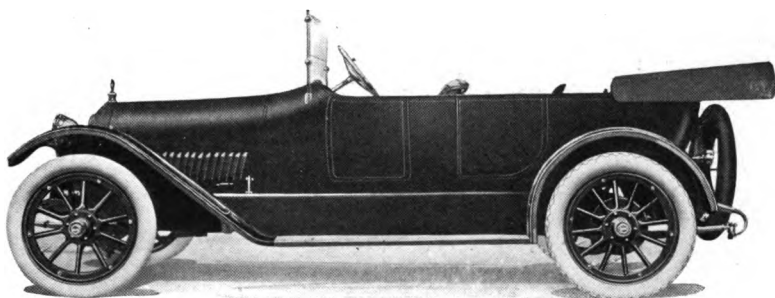


HAYNES KOKOMO SIX—35

COLOR	Body, Brewster green; chassis, hood and fenders, black.	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER.	Left side	COOLING	Water pump
WHEELBASE	127 inches	IGNITION	Generator and storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Chain to crankshaft
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	29.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE . .	3½ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR . . .	Full worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, clock and demountable rims

**THE
LEXINGTON-
HOWARD CO.
CONNERSVILLE
I N D I A N A**

**Price . . . \$1875
Clubster . . 1875**

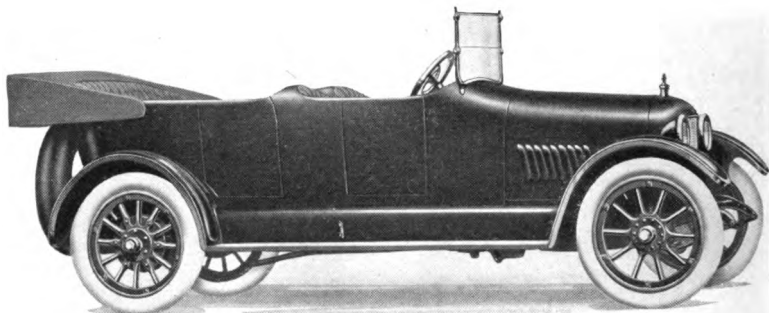


LEXINGTON TOURING CAR—6-N

COLOR	Optional	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Six persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	132 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Internal expanding	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Internal expanding	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	29.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3½ x 5¼ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter and demountable rims

**THE THOMAS
B. JEFFERY
COMPANY**
KENOSHA
WISCONSIN

Price \$1035
Five-Passenger Touring . . . 1000
Seven-Passenger Sedan . . . 1200
Five-Passenger Sedan . . . 1165
Three-Passenger Roadster . . 1000

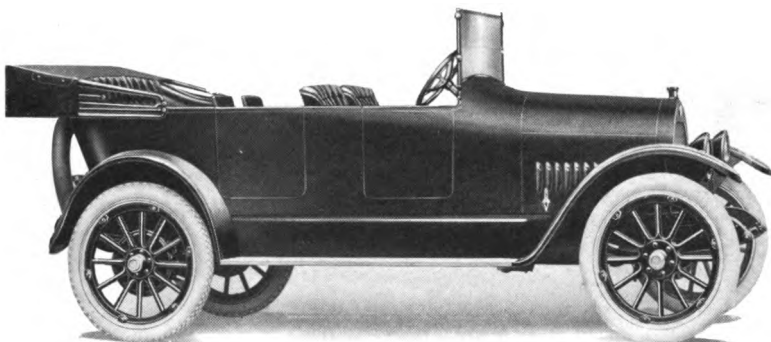


JEFFERY TOURING CAR—462

COLOR	Brewster green and black	LUBRICATION	Force feed and splash
SEATING CAPACITY . .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER .	Left side	COOLING	Water pump
WHEELBASE	116 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4 inches	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE . .	Contracting on drive shaft	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Four	CLUTCH	Plate
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward
HORSEPOWER	22.5	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Semi-floating
BORE AND STROKE . .	3¼ x 5¼ inches	STEERING GEAR . . .	Worm and wheel

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**THE
LEXINGTON-
HOWARD CO.
CONNERSVILLE
I N D I A N A**

**Price \$1875
Clubster . . 1875**

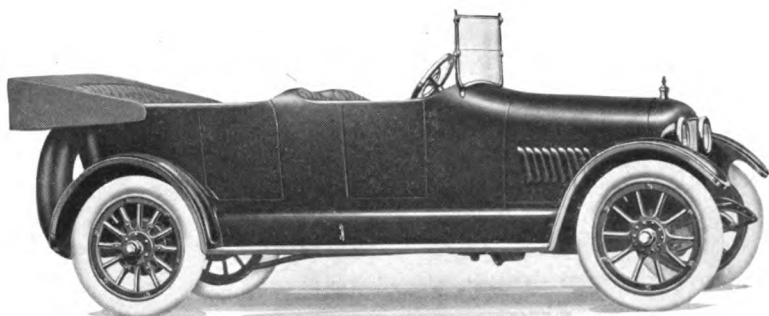


LEXINGTON TOURING CAR—6-N

COLOR	Optional	LUBRICATION	Force feed and splash
SEATING CAPACITY . .	Six persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	132 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Internal expanding	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Internal expanding	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	29.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3½ x 5¼ inches	REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter and demountable rims

**THE THOMAS
B. JEFFERY
COMPANY**
KENOSHA
WISCONSIN


Price	\$1035
Five-Passenger Touring	1000
Seven-Passenger Sedan	1200
Five-Passenger Sedan	1165
Three-Passenger Roadster . . .	1000

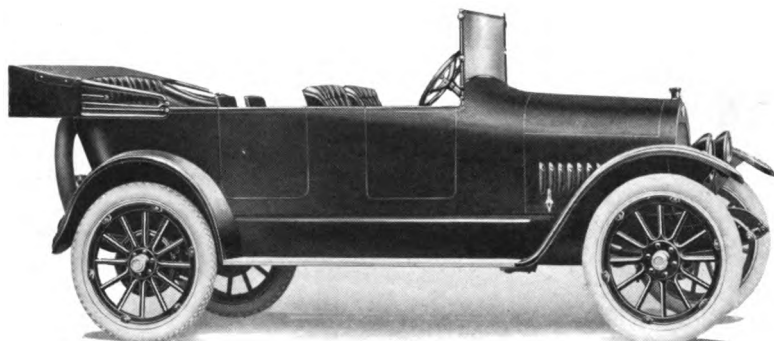

JEFFERY TOURING CAR—462

COLOR	Brewster green and black	LUBRICATION	Force feed and splash
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	116 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . . .	Two unit
WHEELS	Wood	STARTER OPERATED . .	Gear to fly wheel
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM . . .	Electric
REAR TIRES	34 x 4 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Contracting on drive shaft	GASOLINE SYSTEM . . .	Vacuum
CYLINDERS	Four	CLUTCH	Plate
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward
HORSEPOWER	22.5	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Semi-floating
BORE AND STROKE	3¼ x 5¼ inches	STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

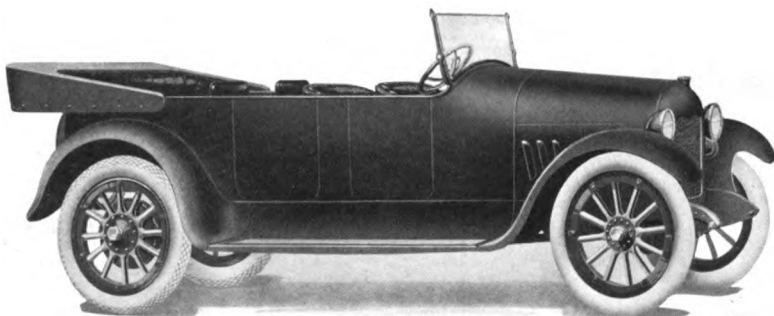

CASE TOURING CAR


COLOR	Body, Brewster green; chassis, black	BORE AND STROKE	3½ x 6 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	External on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Internal on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.03 (N. A. C. C. Rating)	Gear CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Screw and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter and demountable rims

CHANDLER MOTOR CAR COMPANY

CLEVELAND, OHIO


Price	\$1295
Roadster	1295
Limousine	2450
Sedan	2250
Convertible Sedan	1795
Coupe	1950
Cabriolet	1650

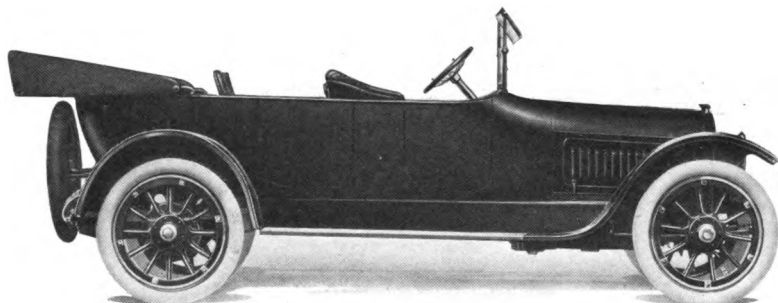

CHANDLER TOURING CAR

COLOR	Dark blue and black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	123 inches	IGNITION	High tension magneto
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES	Three and reverse
HORSEPOWER	27.34 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3 1/4 x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, hood, windshield, speedometer and demountable rims

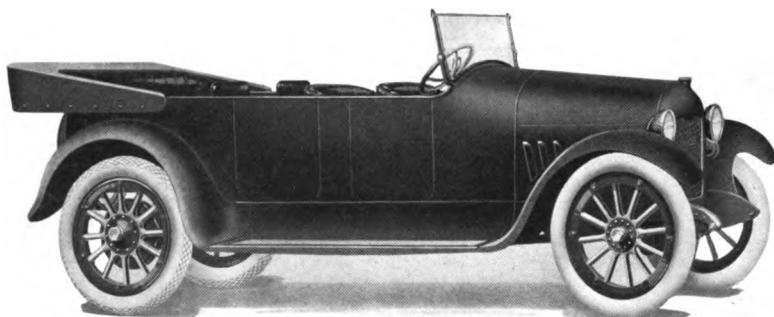

CASE TOURING CAR


COLOR	Body, Brewster green; chassis, black	BORE AND STROKE	3½ x 6 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	External on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Internal on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.03 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Screw and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter and demountable rims

CHANDLER MOTOR CAR COMPANY

CLEVELAND, OHIO

Price	\$1295
Roadster	1295
Limousine	2450
Sedan	2250
Convertible Sedan	1795
Coupe	1950
Cabriolet	1650

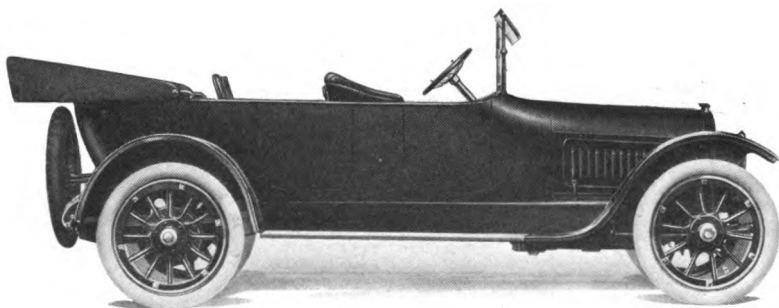

CHANDLER TOURING CAR


COLOR	Dark blue and black
SEATING CAPACITY	Seven persons
POSITION OF DRIVER	Left side
WHEELBASE	123 inches
GAUGE	56 inches
WHEELS	Wood
FRONT TIRES	34 x 4 inches
REAR TIRES	34 x 4 inches
SERVICE BRAKE	Contracting on rear wheels
EMERGENCY BRAKE	Expanding on rear wheels
CYLINDERS	Six
ARRANGED	Vertically
CAST	In threes
HORSEPOWER	27.34 (N. A. C. C. Rating)
BORE AND STROKE	3½ x 5 inches

LUBRICATION	Splash with circulating pump
RADIATOR	Cellular
COOLING	Water pump
IGNITION	High tension magneto
STARTING SYSTEM	Two unit
STARTER OPERATED	Gear to fly wheel
LIGHTING SYSTEM	Electric
VOLTAGES	Six
WIRING SYSTEM	Single
GASOLINE SYSTEM	Vacuum
CLUTCH	Dry multiple disc
TRANSMISSION	Selective sliding
GEAR CHANGES	Three and reverse
DRIVE	Spiral bevel
REAR AXLE	Three-quarters floating
STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

**THE
PATHFINDER
COMPANY**
**INDIANAPOLIS
INDIANA**

Price \$2475
Clover Leaf Roadster . 2750

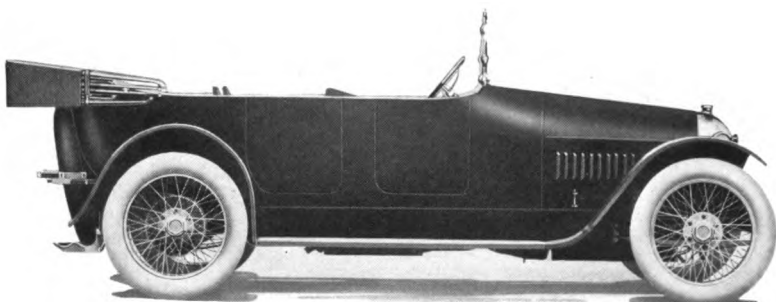


PATHFINDER LA SALLE—1-B

COLOR	Body, blue ; running gear, black	BORE AND STROKE . . .	2 3/4 x 5 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	130 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wire	STARTING SYSTEM . .	Single unit
FRONT TIRES	35 x 5 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	35 x 5 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Expanding on rear axle	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Twelve	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V-type, 60 degrees	CLUTCH	Dry multiple disc
CAST	In threes	TRANSMISSION	Selective sliding
HORSEPOWER	39.68 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**JAS. CUNNINGHAM
SON & COMPANY**
ROCHESTER
NEW YORK

Price	\$3750
Runabout	3500
Four Passenger	3750
Limousine	5000
Landaulet	5000

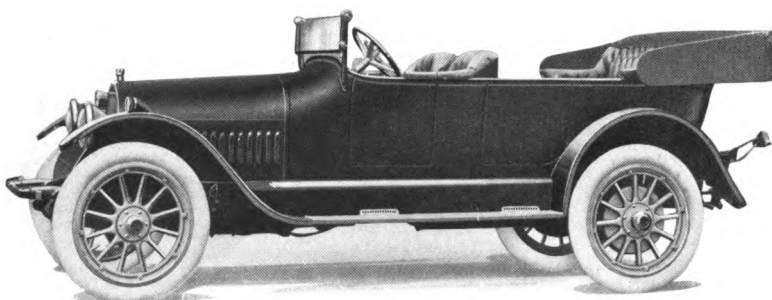


CUNNINGHAM TOURING CAR—S

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	High-tension magneto
WHEELBASE	129 inches	STARTING SYSTEM	Electric
GAUGE	56 inches	STARTER OPERATED	Gear in transmission
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	37 x 5 inches, anti-skid	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Internal expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	36.1 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE	4¾ x 5¾ inches	STEERING GEAR	Worm and sector
LUBRICATION	Full force feed		

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter and demountable rims

**THE
PATHFINDER
COMPANY**
INDIANAPOLIS
INDIANA

Price \$2475
Clover Leaf Roadster . 2750

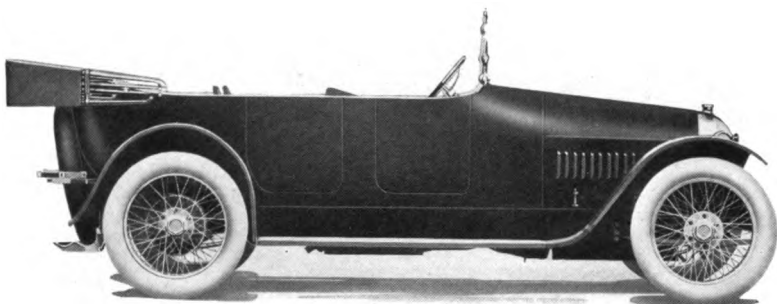


PATHFINDER LA SALLE—1-B

COLOR	Body, blue ; running gear, black	BORE AND STROKE	2 $\frac{1}{4}$ x 5 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	130 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wire	STARTING SYSTEM	Single unit
FRONT TIRES	35 x 5 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	35 x 5 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear axle	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Twelve	GASOLINE SYSTEM	Vacuum
ARRANGED	V-type, 60 degrees	CLUTCH	Dry multiple disc
CAST	In threes	TRANSMISSION	Selective sliding
HORSEPOWER	39.68 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm

In addition to above specifications, price includes top, top hood,
windshield, speedometer, ammeter, clock and demountable rims

**JAS. CUNNINGHAM
SON & COMPANY**
ROCHESTER
NEW YORK

Price	\$3750
Runabout	3500
Four Passenger	3750
Limousine	5000
Landaulet	5000

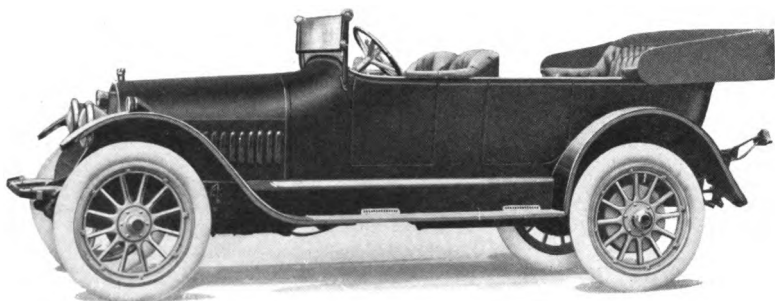


CUNNINGHAM TOURING CAR—S

COLOR	Optional	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	High-tension magneto
WHEELBASE	129 inches	STARTING SYSTEM	Electric
GAUGE	56 inches	STARTER OPERATED	Gear in trans- mission
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	37 x 5 inches	VOLTAGES	Six
REAR TIRES	37 x 5 inches, anti-skid	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Pressure
EMERGENCY BRAKE	Internal expand- ing on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
CAST	In pairs	DRIVE	Spiral bevel
HORSEPOWER	36.1 (N. A. C. C. Rating)	REAR AXLE	Full floating
BORE AND STROKE	4¾ x 5¾ inches	STEERING GEAR	Worm and sector
LUBRICATION	Full force feed		

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter and demountable rims

**LOCOMOBILE
COMPANY
OF AMERICA**
**BRIDGEPORT
CONNECTICUT**

Price	\$4400
Six-Passenger Touring	4400
Seven-Passenger Limousine .	5400
Seven-Passenger Landaulet .	5500
Seven-Passenger Berline . .	5700

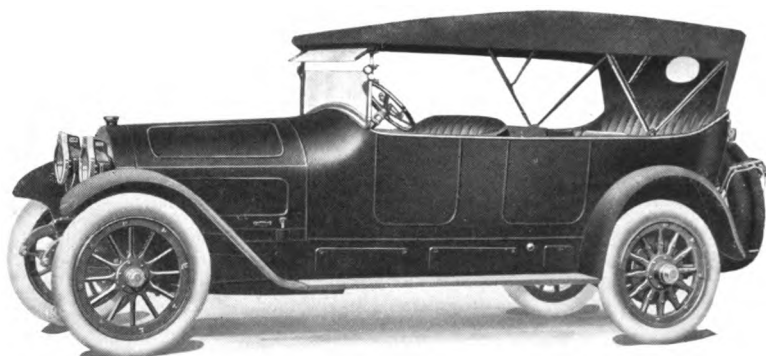


LOCOMOBILE "38" TOURING CAR—R-6

COLOR	Optional	LUBRICATION	Pressure and internal circulating system
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	140 inches	IGNITION	High-tension magneto and storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	37 x 5 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Four forward
HORSEPOWER	43.35 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	4¼ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**LOCOMOBILE
COMPANY
OF AMERICA**
**BRIDGEPORT
CONNECTICUT**

Price	\$6200
Six-Passenger Touring	5100
Seven-Passenger Touring	5100
Seven-Passenger Landaulet	6300
Seven-Passenger Berline	6500

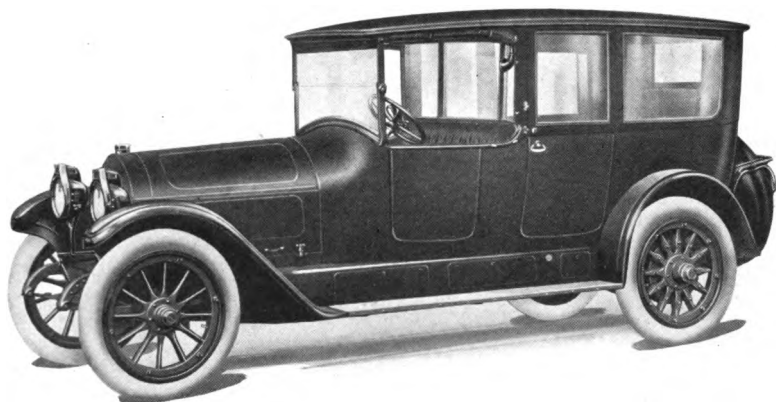


LOCOMOBILE "48" LIMOUSINE—M-6

COLOR	Optional	LUBRICATION	Pressure and internal circulating system
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	143 inches	IGNITION	High-tension magneto and storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	37 x 5 inches	LIGHTING SYSTEM	Electric
REAR TIRES	37 x 5 inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Pressure
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Four forward
HORSEPOWER	48.6 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	4 1/2 x 5 1/2 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes windshield, speedometer, ammeter, voltmeter, clock and demountable rims

**THE WILLYS-
OVERLAND
COMPANY**
TOLEDO, OHIO

Price . . . \$615
Roadster . . . 595

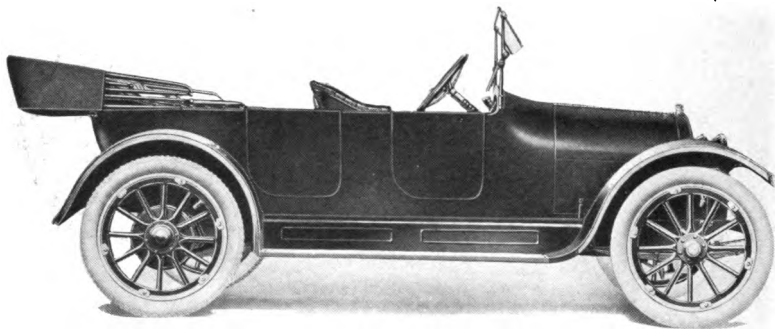


OVERLAND TOURING CAR—75

COLOR	Black	BORE AND STROKE . . .	3¼ x 5 inches
SEATING CAPACITY . .	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	104 inches	COOLING	Thermo-syphon
GAUGE	56 or 60 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM . . .	Two unit
FRONT TIRES	31 x 4 inches	STARTER OPERATED . .	Gear to fly wheel
REAR TIRES	31 x 4 inches, anti-skid	LIGHTING SYSTEM . . .	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE . . .	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM . . .	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	15.63	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**THE WILLYS-
OVERLAND
COMPANY**
TOLEDO, OHIO


Price	\$750
Roadster	725
Panel Delivery	750
Open Delivery	725
Limousine	950
Coupe	875

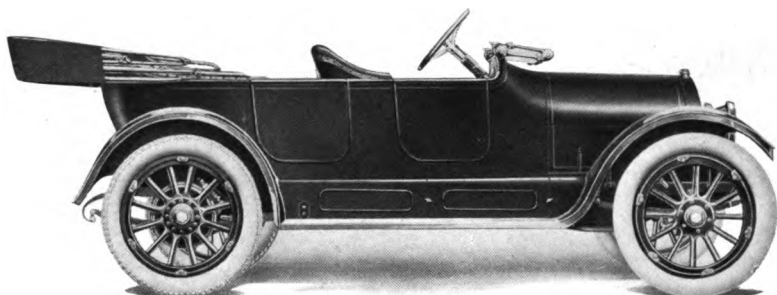

OVERLAND TOURING CAR—83

COLOR	Body, Brewster green; fenders and radiator, black	BORE AND STROKE	4½ x 4½ inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 or 60 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	33 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	Separately	TRANSMISSION	Selective sliding
HORSEPOWER	27.23 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

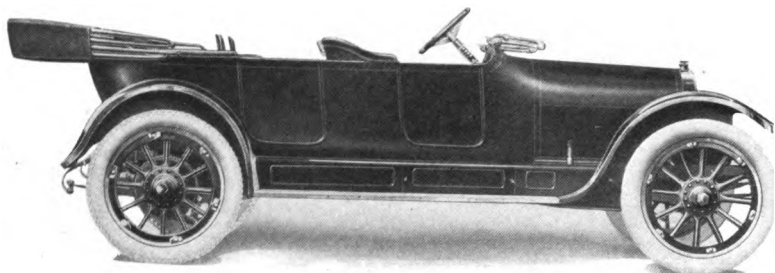

OVERLAND TOURING CAR—86


COLOR	Body, Brewster green; fenders and radiator, black	BORE AND STROKE	3 1/4 x 5 1/4 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	125 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High tension magneto
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	35 x 4 1/2 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	35 x 4 1/2 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CASE	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	29.4	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

THE WILLYS- OVERLAND COMPANY

TOLEDO, OHIO

Price \$1125
Roadster . . . 1095
Coupe 1500
Limousine . . 1750

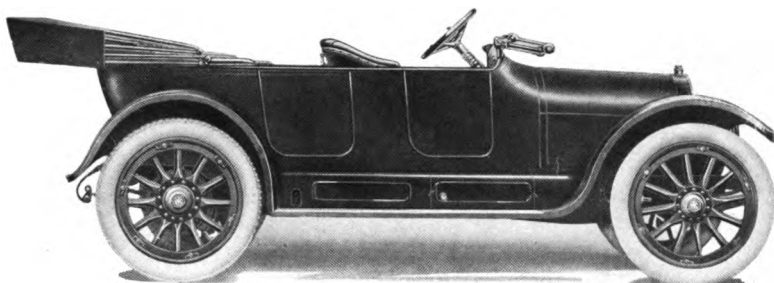


WILLYS-KNIGHT TOURING CAR—84 B

COLOR	Body, royal blue; wheels, gray; fenders, black	BORE AND STROKE . .	4½ x 4½ inches
SEATING CAPACITY . .	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	114 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE . .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Four	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	27.23 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**OLDS MOTOR
WORKS
LANSING
MICHIGAN**

**Price \$1095
Roadster . . 1095**

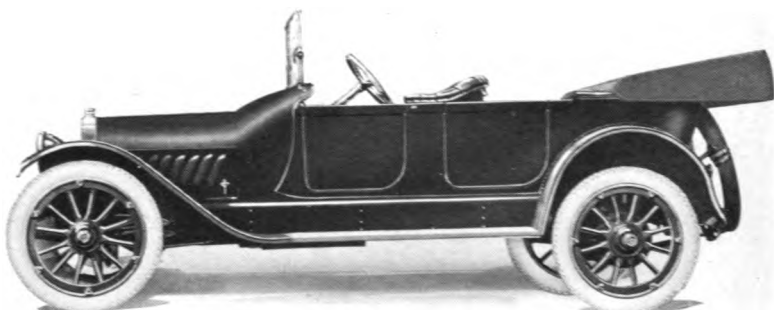

OLDSMOBILE TOURING CAR—43


COLOR	Orriford lake or Brewster green with natural wood wheels	BORE AND STROKE . . .	3 1/2 x 5 inches
SEATING CAPACITY . .	Five persons	LUBRICATION	Full splash
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Delco system
WHEELS	Wood	STARTING SYSTEM . . .	Single unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED . .	Gear to fly wheel
REAR TIRES	33 x 4 inches, anti-skid	LIGHTING SYSTEM . . .	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE . .	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM . . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	19.6 (N. A. C. C. Rating)	GEAR CHANGES	Three forward
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Screw and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

OLDS MOTOR WORKS

LANSING
MICHIGAN

Price . . . \$1195
Roadster . . 1195

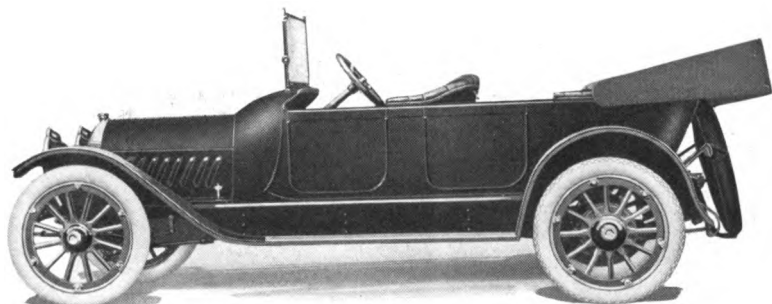


OLDSMOBILE TOURING CAR—44

COLOR	Royal green with natural wood wheels	BORE AND STROKE . .	2 $\frac{1}{8}$ x 4 $\frac{3}{4}$ inches
SEATING CAPACITY .	Five persons	LUBRICATION	Full force feed
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Delco system
WHEELS	Wood	STARTING SYSTEM . .	Three unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	33 x 4 inches anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Eight	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V type, 90 degrees	CLUTCH	Cone
CAST	En bloc with half of crank case	TRANSMISSION	Selective sliding
HORSEPOWER	26.45 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Screw and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**PAIGE-DETROIT
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price, \$1050

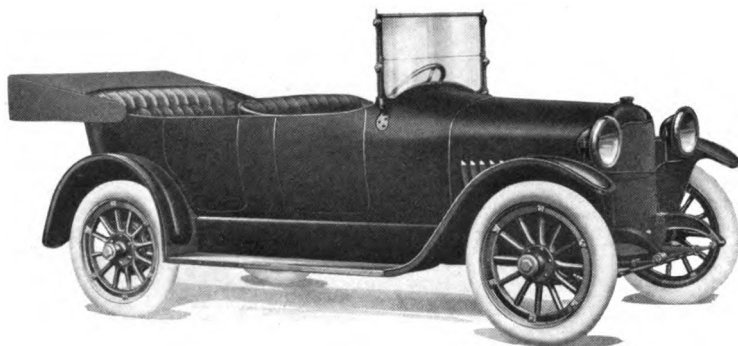


PAIGE FLEETWOOD SIX—38

COLOR	Body, Richelieu blue with straw colored wheels	LUBRICATION	Force feed and splash
SEATING CAPACITY	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	117 inches	IGNITION	High tension magneto and storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Six	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward
HORSEPOWER	23.44	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Three-quarters floating
BORE AND STROKE	3½ x 5 inches	STEERING GEAR	Screw and split sleeve

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PAIGE-DETROIT
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

Price	\$1295
Seven-Passenger Sedan	1900
Three-Passenger Cabriolet	1600
Three-Passenger Coupe	1700
Seven-Passenger Town Car	2250
Three-Passenger Roadster	1295

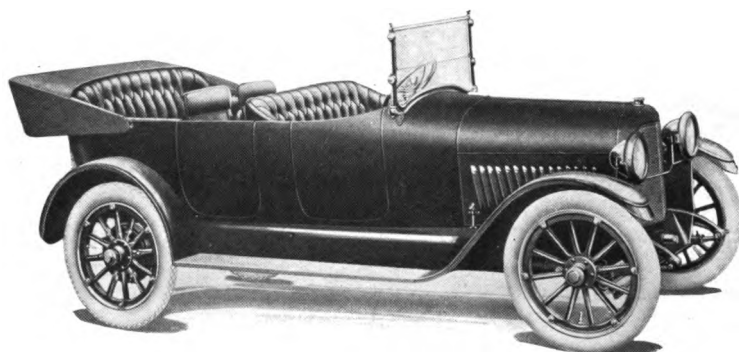


PAIGE FAIRFIELD SIX—46

COLOR	Body, Richelieu blue; running gear, red	BORE AND STROKE	3½ x 5½ inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	124 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Multiple disc in oil
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	29.4 (N. A. C. C. Rating)	GEAR CHANGES	Three
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Screw and split sleeve

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PAIGE-DETROIT
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

Price, \$1050

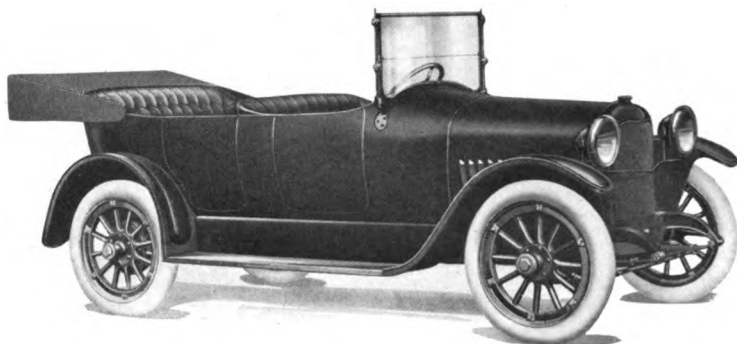


PAIGE FLEETWOOD SIX—38

COLOR	Body, Richelieu blue with straw colored wheels	LUBRICATION	Force feed and splash
SEATING CAPACITY . .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER .	Left side	COOLING	Water pump
WHEELBASE	117 inches	IGNITION	High tension magneto and storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . .	Single
EMERGENCY BRAKE . .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Six	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . .	Three forward
HORSEPOWER	23.44	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Three-quarters floating
BORE AND STROKE . .	3½ x 5 inches	STEERING GEAR . . .	Screw and split sleeve

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

**PAIGE-DETROIT
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**


Price	\$1295
Seven-Passenger Sedan	1900
Three-Passenger Cabriolet . . .	1600
Three-Passenger Coupe	1700
Seven-Passenger Town Car . . .	2250
Three-Passenger Roadster . . .	1295

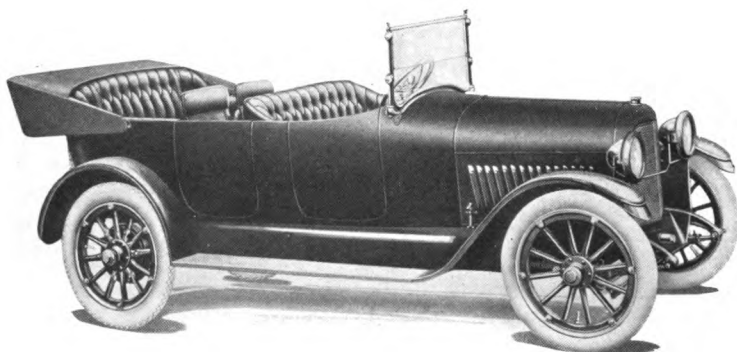

PAIGE FAIRFIELD SIX—46

COLOR	Body, Richelieu blue; running gear, red	BORE AND STROKE	3½ x 5¼ inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	124 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Multiple disc in oil
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	29.4 (N. A. C. C. Rating)	GEAR CHANGES	Three
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Screw and split sleeve


In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

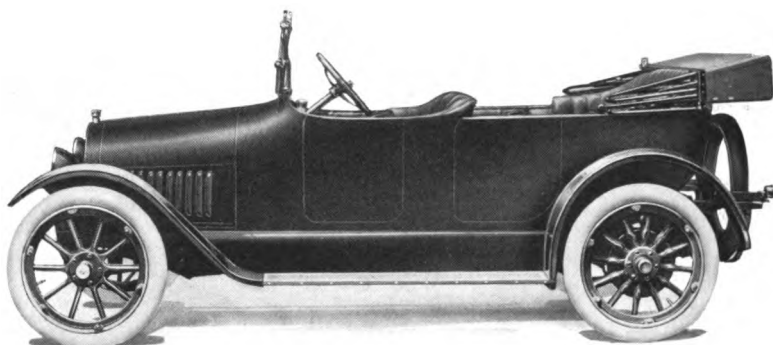

STEARNS-KNIGHT TOURING CAR—L-4

COLOR	Body, Stearns Royal green; run- ning gear, black	BORE AND STROKE . .	3¼ x 5½ inches
SEATING CAPACITY .	Five persons	LUBRICATION	Full force feed
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	119 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches,	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 inches,	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on transmission shaft	VOLTAGES	Twelve
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Four	GASOLINE SYSTEM . .	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	22.5 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three
		DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top
hood, windshield, speedometer, ammeter and demountable rims

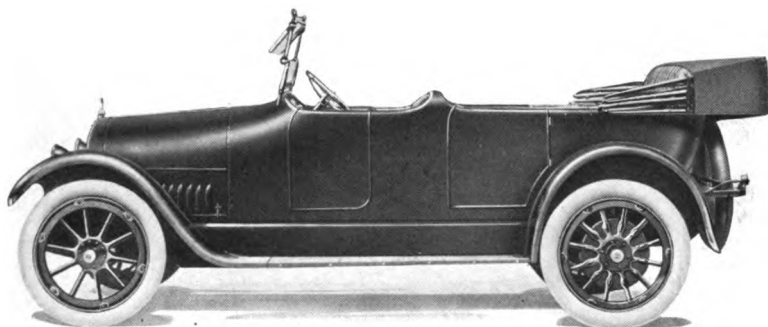


STEARNS-KNIGHT EIGHT

COLOR	Body, Stearns Brewster green; running gear, black	BORE AND STROKE . .	3¼ x 5 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	123 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	35 x 4½ inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on transmission shaft	VOLTAGES	Twelve
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Eight	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V-type, 90 degrees	CLUTCH	Dry multiple disc
CAST	In fours	TRANSMISSION . . .	Selective sliding
HORSEPOWER	33.8 (N. A. C. C. Rating)	GEAR CHANGES . .	Three
		DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**APPERSON
BROTHERS
AUTOMOBILE
COMPANY**
K O K O M O
I N D I A N A

Price \$1850
Four-Passenger Roadster . 1850

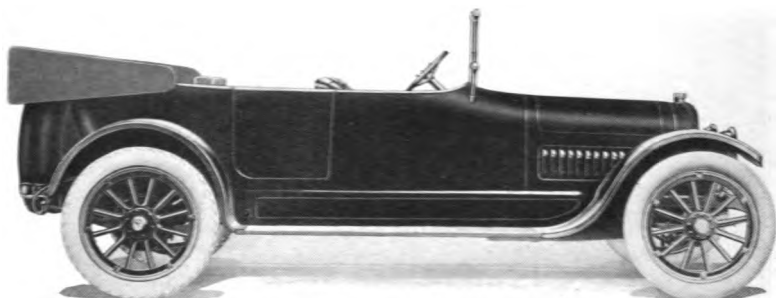


APPERSON LIGHT EIGHT TOURING CAR—8-16

COLOR	Blue or green	BORE AND STROKE	3¼ x 5 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
Wheel base	128 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	35 x 4½ inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	35 x 4½ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
CYLINDERS	Eight	GASOLINE SYSTEM	Vacuum
ARRANGED	V type, 90 degrees	CLUTCH	Plate
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	31.25 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**APPERSON
BROTHERS
AUTOMOBILE
COMPANY
K O K O M O
I N D I A N A**

Price \$1550
Four-Passenger Roadster 1550
Five-Passenger Touring Car . . . 1485

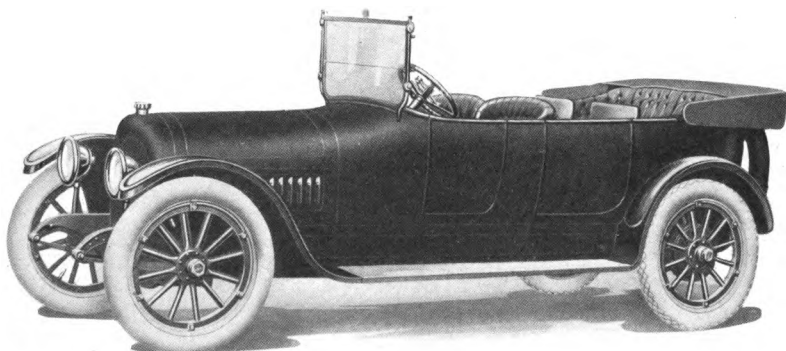


APPERSON LIGHT SIX TOURING CAR—6-16

COLOR	Blue or green	BORE AND STROKE	3½ x 5 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
Wheel base	128 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Plate
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	29.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**P A C K A R D
M O T O R C A R
C O M P A N Y
D E T R O I T
M I C H I G A N**

Price	\$3150
Seven-Passenger Salon Touring . .	3150
Six-Passenger Salon Touring . .	3150
Five-Passenger Phaeton	3150
Five-Passenger Salon Phaeton . .	3150

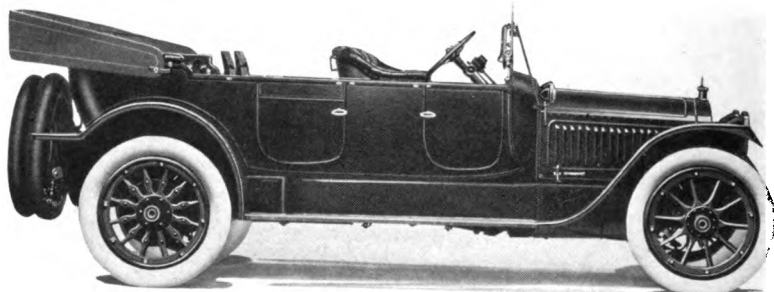


PACKARD STANDARD TOURING CAR—1-35

COLOR	Body and door panels, Packard blue, striped with cream yellow; wheels, cream yellow, striped with black; chassis, black	HORSEPOWER	43.2 (N. A. C. C. Rating)
SEATING CAPACITY . .	Seven persons	BORE AND STROKE . .	3 x 5 inches
POSITION OF DRIVER .	Left side	LUBRICATION	Full force feed
WHEELBASE	135 inches	RADIATOR	Vertical tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	Generator with storage battery
FRONT TIRES	36 x 4½ inches, cord	STARTING SYSTEM . .	Two unit
REAR TIRES	37 x 5 inches, cord	STARTER OPERATED .	Gear to fly wheel
SERVICE BRAKE . . .	Contracting on rear wheels	LIGHTING SYSTEM . .	Electric
EMERGENCY BRAKE . .	Expanding on rear wheels	VOLTAGES	Seven
CYLINDERS	Twelve	WIRING SYSTEM . . .	Double
ARRANGED	V-type, 60 degrees	GASOLINE SYSTEM . .	Pressure
CAST	In sixes	CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Non-floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**PACKARD
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price		\$4650
Seven-Passenger Imperial Limousine		4800
Seven-Passenger Salon Limousine		4750
Seven-Passenger Limousine with Cab Sides		4650
Seven-Passenger Limousine without Cab Sides		4600
Six-Passenger Limousine without Cab Sides		4550
Six-Passenger Landaulet without Cab Sides		4550
Four-Passenger Brougham		4600

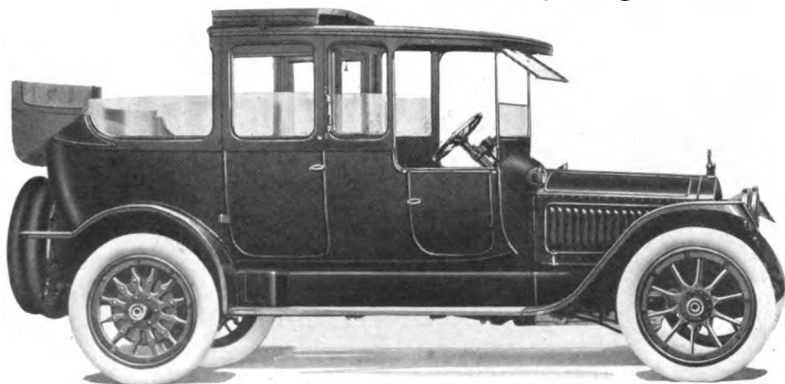

PACKARD LANDAULET WITH CAB SIDES—1-35


COLOR	Body and door panels, Packard blue, striped with black; wheels, Packard blue, striped with black; chassis, black
SEATING CAPACITY	Seven persons
POSITION OF DRIVER	Left side
WHEELBASE	135 inches
GAUGE	56 inches
WHEELS	Wood
FRONT TIRES	36 x 4 1/2 inches, cord
REAR TIRES	37 x 5 inches, cord
SERVICE BRAKE	Contracting on rear wheels
EMERGENCY BRAKE	Expanding on rear wheels
CYLINDERS	Twelve
ARRANGED	V-type, 60 degrees
CAST	In sixes

HORSEPOWER	43.2 (N. A. C. C. Rating)
BORE AND STROKE	3 x 5 inches
LUBRICATION	Force feed
RADIATOR	Vertical tube
COOLING	Water pump
IGNITION	Generator with storage battery
STARTING SYSTEM	Two unit
STARTER OPERATED	Gear to fly wheel
LIGHTING SYSTEM	Electric
VOLTAGES	Seven
WIRING SYSTEM	Double
GASOLINE SYSTEM	Pressure
CLUTCH	Dry multiple disc
TRANSMISSION	Selective sliding
GEAR CHANGES	Three forward, one reverse
DRIVE	Spiral bevel
REAR AXLE	Non-floating
STEERING GEAR	Worm and nut

In addition to above specifications, price includes speedometer, ammeter, clock and demountable rims

**PACKARD
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

Price	\$3150
Seven-Passenger Salon Touring . . .	3150
Six-Passenger Salon Touring . . .	3150
Five-Passenger Phaeton	3150
Five-Passenger Salon Phaeton . . .	3150

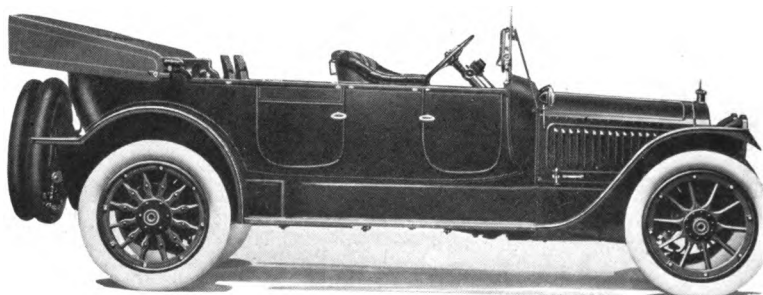


PACKARD STANDARD TOURING CAR—1-35

COLOR	Body and door panels, Packard blue, striped with cream yellow; wheels, cream yellow, striped with black; chassis, black	HORSEPOWER	43.2 (N. A. C. C. Rating)
SEATING CAPACITY	Seven persons	BORE AND STROKE	3 x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Full force feed
WHEELBASE	135 inches	RADIATOR	Vertical tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	Generator with storage battery
FRONT TIRES	36 x 4½ inches, cord	STARTING SYSTEM	Two unit
REAR TIRES	37 x 5 inches, cord	STARTER OPERATED	Gear to fly wheel
SERVICE BRAKE	Contracting on rear wheels	LIGHTING SYSTEM	Electric
EMERGENCY BRAKE	Expanding on rear wheels	VOLTAGES	Seven
CYLINDERS	Twelve	WIRING SYSTEM	Double
ARRANGED	V-type, 60 degrees	GASOLINE SYSTEM	Pressure
CAST	In sixes	CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Non-floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**PACKARD
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price	\$4650
Seven-Passenger Imperial Limousine	4800
Seven-Passenger Salon Limousine	4750
Seven-Passenger Limousine with Cab Sides	4650
Seven-Passenger Limousine without Cab Sides	4600
Six-Passenger Limousine without Cab Sides	4550
Six-Passenger Landaulet without Cab Sides	4550
Four-Passenger Brougham	4600

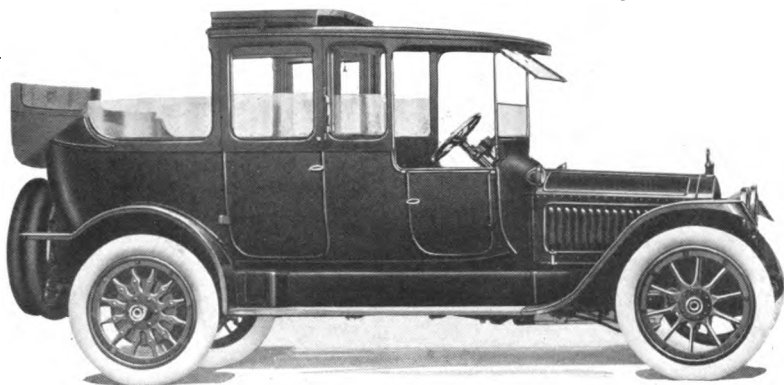


PACKARD LANDAULET WITH CAB SIDES—1-35

COLOR	Body and door panels, Packard blue, striped with black; wheels, Packard blue, striped with black; chassis, black	HORSEPOWER	43.2 (N. A. C. C. Rating)
SEATING CAPACITY	Seven persons	BORE AND STROKE	3 x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Force feed
WHEELBASE	135 inches	RADIATOR	Vertical tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	Generator with storage battery
FRONT TIRES	36 x 4 1/4 inches, cord	STARTING SYSTEM	Two unit
REAR TIRES	37 x 5 inches, cord	STARTER OPERATED	Gear to fly wheel
SERVICE BRAKE	Contracting on rear wheels	LIGHTING SYSTEM	Electric
EMERGENCY BRAKE	Expanding on rear wheels	VOLTAGES	Seven
CYLINDERS	Twelve	WIRING SYSTEM	Double
ARRANGED	V-type, 60 degrees	GASOLINE SYSTEM	Pressure
CAST	In sixes	CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Non-floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes speedometer, ammeter, clock and demountable rims

**PACKARD
MOTOR CAR
COMPANY**
DETROIT, MICHIGAN

Price	\$3150
Seven-Passenger Salon Touring	3150
Six-Passenger Salon Touring	3150
Five-Passenger Phaeton	3150
Five-Passenger Salon Phaeton	3150

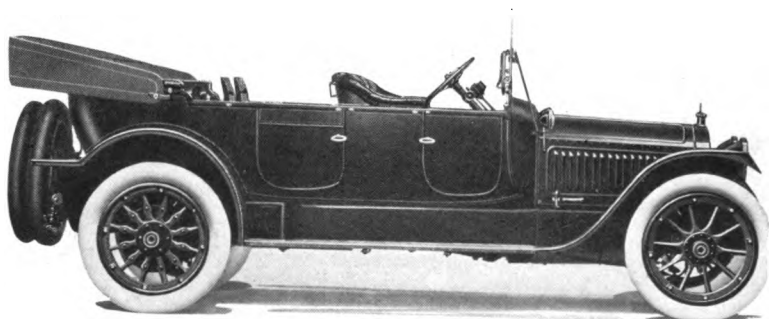


PACKARD STANDARD TOURING CAR—1-35

COLOR	Body and door panels, Packard blue, striped with cream yellow; wheels, cream yellow, striped with black; chassis, black	HORSEPOWER	43.2 (N. A. C. C. Rating)
SEATING CAPACITY	Seven persons	BORE AND STROKE	3 x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Full force feed
WHEELBASE	135 inches	RADIATOR	Vertical tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	Generator with storage battery
FRONT TIRES	36 x 4½ inches, cord	STARTING SYSTEM	Two unit
REAR TIRES	37 x 5 inches, cord	STARTER OPERATED	Gear to fly wheel
SERVICE BRAKE	Contracting on rear wheels	LIGHTING SYSTEM	Electric
EMERGENCY BRAKE	Expanding on rear wheels	VOLTAGES	Seven
CYLINDERS	Twelve	WIRING SYSTEM	Double
ARRANGED	V-type, 60 degrees	GASOLINE SYSTEM	Pressure
CAST	In sixes	CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Non-floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**PACKARD
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

Price	\$4650
Seven-Passenger Imperial Limousine	4800
Seven-Passenger Salon Limousine	4750
Seven-Passenger Limousine with Cab Sides	4650
Seven-Passenger Limousine without Cab Sides	4600
Six-Passenger Limousine without Cab Sides	4550
Six-Passenger Landaulet without Cab Sides	4550
Four-Passenger Brougham	4600

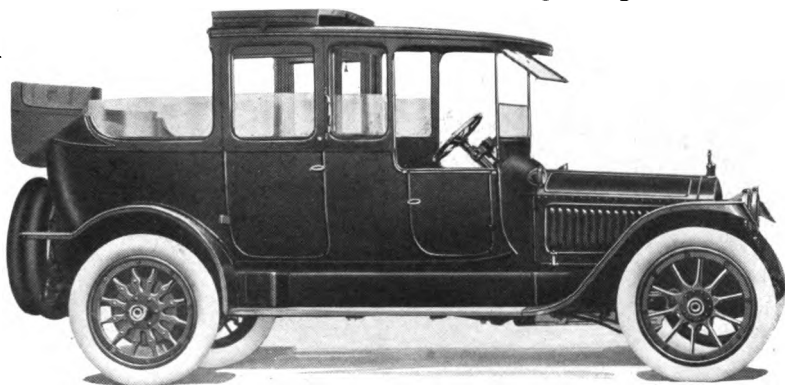


PACKARD LANDAULET WITH CAB SIDES—1-35

COLOR	Body and door panels, Packard blue, striped with black; wheels, Packard blue, striped with black; chassis, black	HORSEPOWER	43.2 (N. A. C. C. Rating)
SEATING CAPACITY	Seven persons	BORE AND STROKE	3 x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Force feed
WHEELBASE	135 inches	RADIATOR	Vertical tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	Generator with storage battery
FRONT TIRES	36 x 4½ inches, cord	STARTING SYSTEM	Two unit
REAR TIRES	37 x 5 inches, cord	STARTER OPERATED	Gear to fly wheel
SERVICE BRAKE	Contracting on rear wheels	LIGHTING SYSTEM	Electric
EMERGENCY BRAKE	Expanding on rear wheels	VOLTAGES	Seven
CYLINDERS	Twelve	WIRING SYSTEM	Double
ARRANGED	V-type, 60 degrees	GASOLINE SYSTEM	Pressure
CAST	In sixes	CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Non-floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes speedometer, ammeter, clock and demountable rims

**PACKARD
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price	\$2750
Seven-Passenger Touring	2750
Seven-Passenger Salon Touring	2750
Five-Passenger Salon Phaeton	2750
Two-Passenger Runabout	2750
Six-Passenger Limousine	4150
Six-Passenger Landaulet	4150
Four-Passenger Brougham	4200
Three-Passenger Coupe	3700

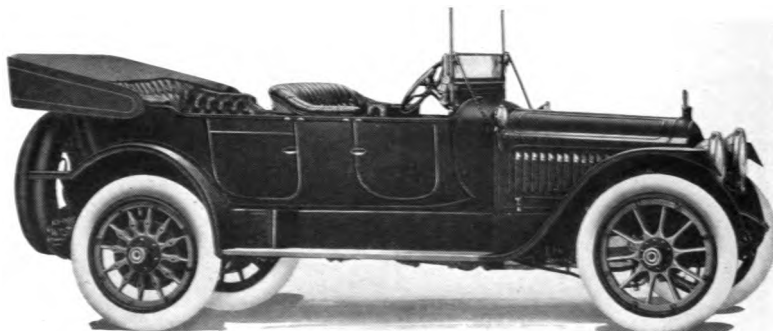


PACKARD PHAETON—1-25

COLOR	Body and door panels, Packard blue, striped with cream yellow; wheels, cream yellow, striped with black; chassis, black	CAST	In sixes
SEATING CAPACITY	Five persons	HORSEPOWER	43.2 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	3 x 5 inches
WHEELBASE	125 inches	LUBRICATION	Force feed
GAUGE	56 inches	RADIATOR	Vertical tube
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 4½ inches, cord	IGNITION	Generator with storage battery
REAR TIRES	37 x 5 inches, cord	STARTING SYSTEM	Two unit
SERVICE BRAKE	Contracting on rear wheels	STARTER OPERATED	Gear to fly wheel
EMERGENCY BRAKE	Expanding on rear wheels	LIGHTING SYSTEM	Electric
CYLINDERS	Twelve	VOLTAGES	Seven
ARRANGED	V-type, 60 degrees	WIRING SYSTEM	Double
		GASOLINE SYSTEM	Pressure
		CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Non-floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and demountable rims

**STUTZ MOTOR
CAR COMPANY**
INDIANAPOLIS
I N D I A N A

Price . . . \$2100
Bearcat . . 2000
Bulldog . . 2250

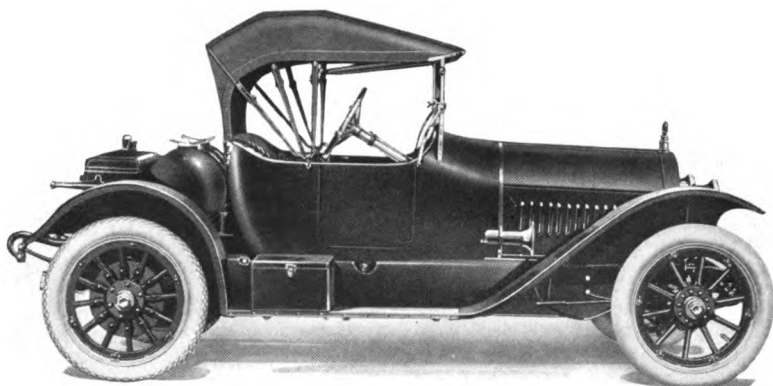


STUTZ ROADSTER—C

COLOR	Yellow, mercedes red, vermillion, or monitor gray	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Two persons	RADIATOR	Cellular
POSITION OF DRIVER	Right side	COOLING	Water pump
WHEELBASE	120 inches	IGNITION	High-tension magneto and storage battery
GAUGE	56½ inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches	VOLTAGES	Six
SERVICE BRAKE . . .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	36.1 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	4¾ x 5½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes ammeter, voltmeter and demountable rims

**STUTZ MOTOR
CAR COMPANY**
INDIANAPOLIS, ILL. DIVISION OF THE STUTZ MOTOR COMPANY
**INDIANAPOLIS
I N D I A N A**

Price \$2550
Touring . . . 2300

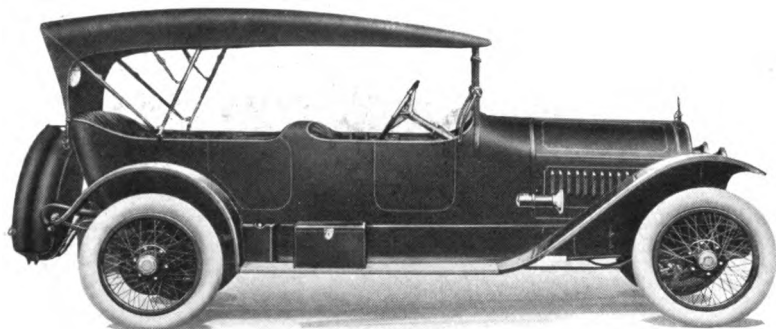


STUTZ BULLDOG SPECIAL—C

COLOR	Battleship gray, azure blue or mercedes red	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Four persons	RADIATOR	Cellular
POSITION OF DRIVER	Right side	COOLING	Water pump
WHEELBASE	130 inches	IGNITION	High-tension magneto and storage battery
GAUGE	56½ inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	33 x 5 inches, cord	LIGHTING SYSTEM . .	Electric
REAR TIRES	33 x 5 inches, cord	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Pressure
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	36.1 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	4¼ x 5½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter and demountable rims

**SAXON MOTOR
COMPANY**
**DETROIT
MICHIGAN**

Price \$395
With winter top . . 455

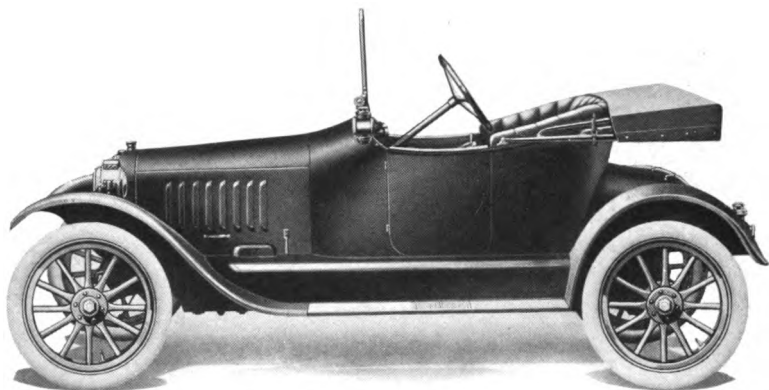


SAXON ROADSTER—14

COLOR	Body, green or blue; running gear, black	BORE AND STROKE . .	2¾ x 4 inches
SEATING CAPACITY .	Two persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	96 inches	COOLING	Thermo-syphon
GAUGE	54 inches	IGNITION	Dry cells
WHEELS	Wood	LIGHTING SYSTEM . .	Gas
FRONT TIRES	28 x 3 inches	GASOLINE SYSTEM . .	Gravity
REAR TIRES	28 x 3 inches,	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Three forward, one reverse
CYLINDERS	Four	DRIVE	Plain bevel
ARRANGED	Vertically	REAR AXLE	Semi-floating
CAST	En bloc	STEERING GEAR	Gear and sector
HORSEPOWER	12.10 (N. A. C. C. Rating)		

In addition to above specifications, price includes top, top hood and windshield

**STUTZ MOTOR
CAR COMPANY**
INDIANAPOLIS
I N D I A N A

Price \$2550
Touring . . . 2300

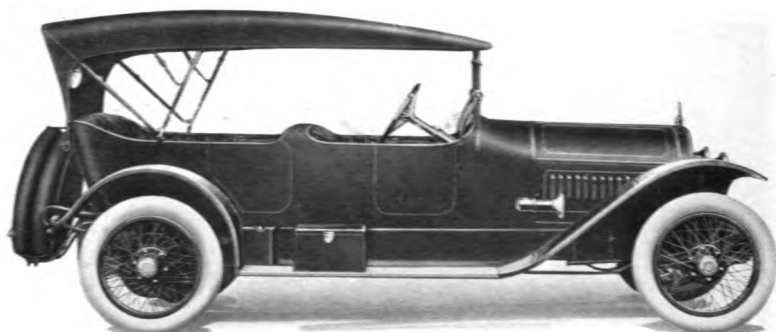


STUTZ BULLDOG SPECIAL—C

COLOR	Battleship gray, azure blue or mercedes red	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Four persons	RADIATOR	Cellular
POSITION OF DRIVER	Right side	COOLING	Water pump
WHEELBASE	130 inches	IGNITION	High-tension magneto and storage battery
GAUGE	56½ inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	33 x 5 inches, cord	LIGHTING SYSTEM . .	Electric
REAR TIRES	33 x 5 inches, cord	VOLTAGES	Six
SERVICE BRAKE . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Pressure
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	36.1 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	4¼ x 5½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter and demountable rims

**SAXON MOTOR
COMPANY**
**DETROIT
MICHIGAN**

Price \$395
With winter top . . . 455

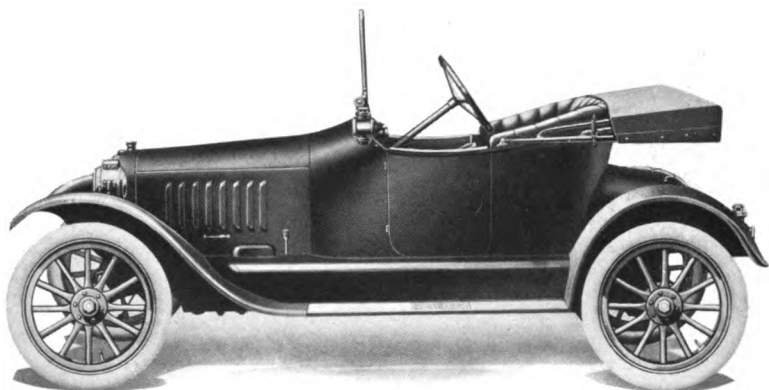


SAXON ROADSTER—14

COLOR	Body, green or blue; running gear, black	BORE AND STROKE . .	2¾ x 4 inches
SEATING CAPACITY .	Two persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	96 inches	COOLING	Thermo-syphon
GAUGE	54 inches	IGNITION	Dry cells
WHEELS	Wood	LIGHTING SYSTEM . .	Gas
FRONT TIRES	28 x 3 inches	GASOLINE SYSTEM . .	Gravity
REAR TIRES	28 x 3 inches,	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Three forward, one reverse
CYLINDERS	Four	DRIVE	Plain bevel
ARRANGED	Vertically	REAR AXLE	Semi-floating
CAST	En bloc	STEERING GEAR	Gear and sector
HORSEPOWER	12.10 (N. A. C. C. Rating)		

In addition to above specifications, price includes top, top hood and windshield

**SAXON MOTOR
COMPANY**
(INCORPORATED IN MICHIGAN)
**DETROIT
MICHIGAN**

Price \$785
With winter top . . . 935

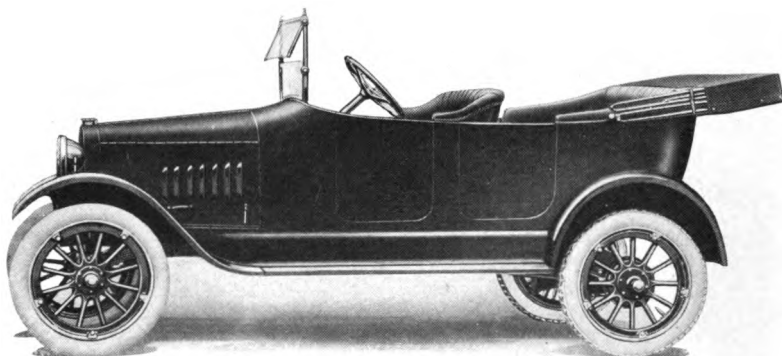


SAXON TOURING CAR—S-2

COLOR	Body, green; running gear, black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	112 inches	IGNITION	Storage battery
GAUGE	54 inches	STARTING SYSTEM .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 3½ inches	LIGHTING SYSTEM .	Electric
REAR TIRES	32 x 3½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM .	Gravity
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . .	Three forward, one reverse
HORSEPOWER	19.84	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Semi-floating
BORE AND STROKE .	2½ x 4½ inches	STEERING GEAR . . .	Worm and nut

In addition to above specifications, price includes top, top hood,
windshield, speedometer, ammeter, voltmeter and demountable rim

**REO MOTOR
CAR COMPANY**
**LANSING
MICHIGAN**

Price \$875
Three-Passenger Runabout . . 875

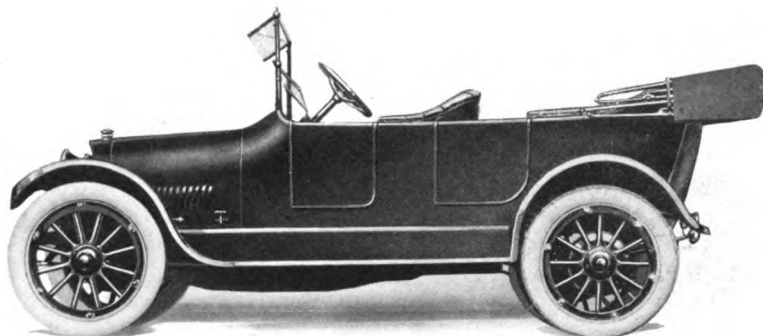


REO THE FIFTH TOURING CAR—R

COLOR	Body, golden olive; running gear, black	BORE AND STROKE . .	4¼ x 4½ inches
SEATING CAPACITY .	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEEL BASE	115 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Chain to transmission shaft
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Four	GASOLINE SYSTEM . .	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	27.23 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**REO MOTOR
CAR COMPANY**
**LANSING
MICHIGAN**

Price, \$1250

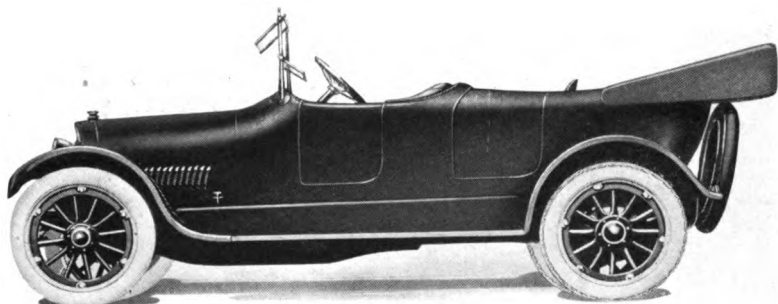

REO TOURING CAR—M


COLOR	Body, golden olive; running gear, black	BORE AND STROKE	3 $\frac{1}{8}$ x 5 $\frac{1}{4}$ inches
SEATING CAPACITY	Seven persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	126 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 $\frac{1}{2}$ inches	STARTER OPERATED	Chain to transmission shaft
REAR TIRES	34 x 4 $\frac{1}{2}$ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In threes	TRANSMISSION	Selective sliding
HORSEPOWER	30.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**STUDEBAKER
CORPORATION
OF AMERICA**

**DETROIT
MICHIGAN**

Price	\$845
Three-Passenger Roadster	825
Three-Passenger Landau Roadster	1145

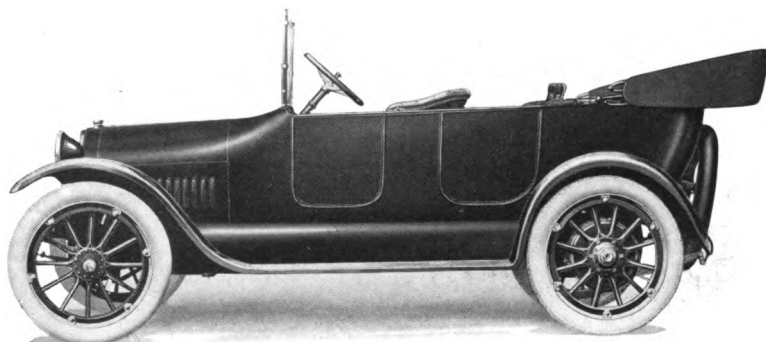


STUDEBAKER FOUR TOURING CAR—SF

COLOR	Body, blue; chassis, black	BORE AND STROKE	3 $\frac{3}{4}$ x 5 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	112 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Chain to crank shaft
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	24.03 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, battery indicator and demountable rims

**STUDEBAKER
CORPORATION
OF AMERICA**
**DETROIT
MICHIGAN**

Price	\$1050
Three-Passenger Roadster	1025
Three-Passenger Landau Roadster	1350
Four-Passenger Coupe	1600
Seven-Passenger Sedan	1675
Seven-Passenger Limousine	2500

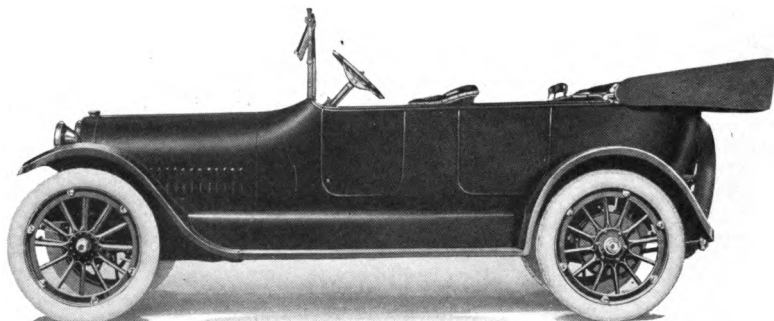


STUDEBAKER SIX TOURING CAR—ED

COLOR	Body, blue; chassis, black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	36.04 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 $\frac{1}{8}$ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, battery indicator and demountable rims

**OAKLAND
MOTOR CAR
COMPANY**
PONTIAC
MICHIGAN

Price . . . \$795
Roadster . . 795

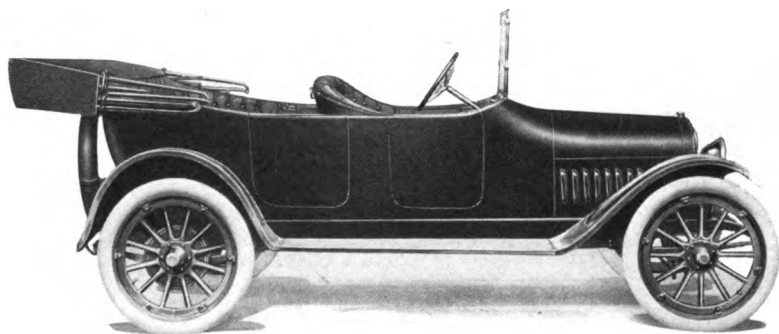


OAKLAND TOURING CAR—32

COLOR	Blue or black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	110 inches	IGNITION	Storage battery
GAUGE	56 or 60 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 3½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 3½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	18.88	DRIVE	Plain bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE .	2½ x 4¾ inches	STEERING GEAR	Worm and split nut

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

**OAKLAND
MOTOR CAR
COMPANY**
PONTIAC
MICHIGAN


Price \$1050
Roadster . . 1050
Speedster . . 1050

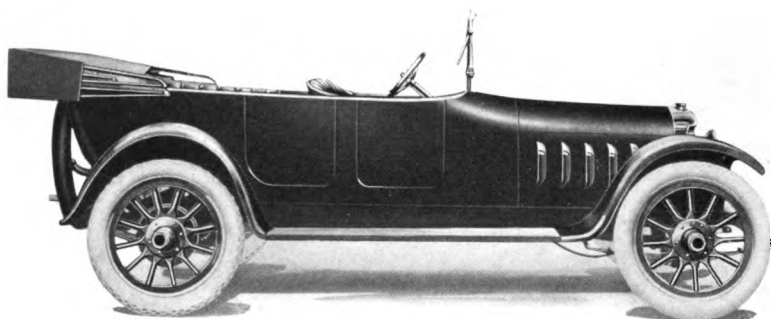

OAKLAND TOURING CAR—38

COLOR	Blue or gray; chassis, black	LUBRICATION	Splash with cir- culating pump
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED .	Gears to fly wheel
REAR TIRES	33 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Four	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding gear
HORSEPOWER	19.6 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
BORE AND STROKE .	3½ x 5 inches	DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and split nut

In addition to above specifications, price includes top, top
hood, windshield, speedometer, ammeter and demountable rims

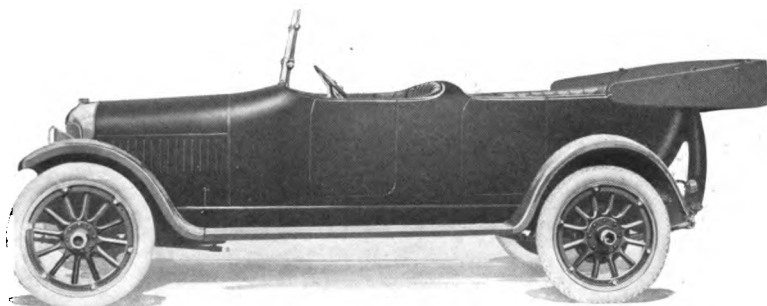

OAKLAND TOURING CAR—50


COLOR	Body, green; chassis, black	BORE AND STROKE	3 1/2 x 4 1/2 inches
SEATING CAPACITY	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	127 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 1/2 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 1/2 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Eight	GASOLINE SYSTEM	Vacuum
ARRANGED	V type, 90 degrees	CLUTCH	Cone
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	39.2 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and split nut

In addition to above specifications, price includes top, top
hood, windshield, speedometer, ammeter and demountable rims

JACKSON AUTOMOBILE COMPANY

JACKSON
MICHIGAN

Price \$985
With Detachable Sedan Top. 1195
Three-Passenger Roadster. . 985

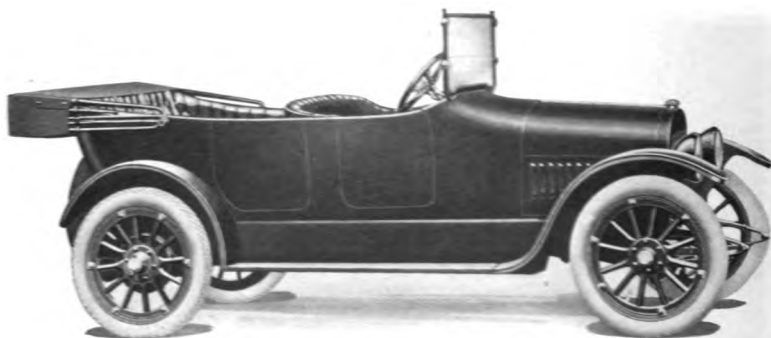

JACKSON TOURING CAR—34


COLOR	Brewster green	LUBRICATION	Force feed and splash
SEATING CAPACITY	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery and dry cells
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three
HORSEPOWER	19.6 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3½ x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

JACKSON AUTOMOBILE COMPANY

JACKSON
MICHIGAN

Price \$1195
With Detachable Sedan Top. 1405
Three-Passenger Roadster . . 1195

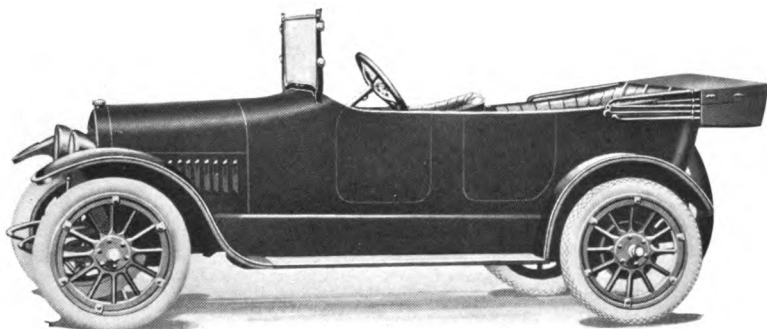

JACKSON TOURING CAR—348


COLOR	Dark green with natural wood wheels	LUBRICATION	Full force feed
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery and dry cells
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Double
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Eight	CLUTCH	Cone
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES . . .	Three
HORSEPOWER	26.45 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	2 $\frac{1}{4}$ x 4 $\frac{3}{4}$ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

JACKSON AUTOMOBILE COMPANY

JACKSON
MICHIGAN

Price \$985
With Detachable Sedan Top . 1195
Three-Passenger Roadster . . 985

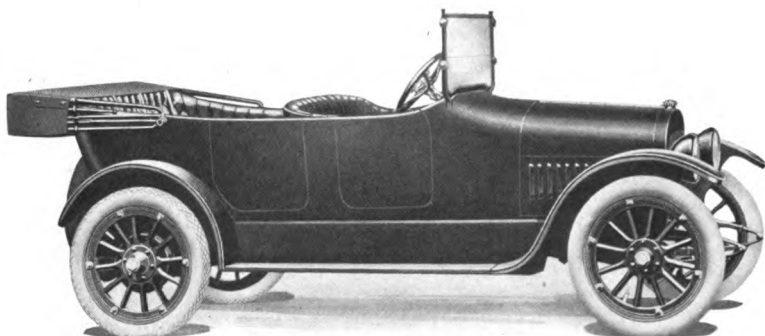

JACKSON TOURING CAR—34


COLOR	Brewster green	LUBRICATION	Force feed and splash
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery and dry cells
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Double
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three
HORSEPOWER	19.6 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE . .	3½ x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

JACKSON AUTOMOBILE COMPANY

JACKSON
MICHIGAN

Price \$1195
With Detachable Sedan Top . 1405
Three-Passenger Roadster . . 1195

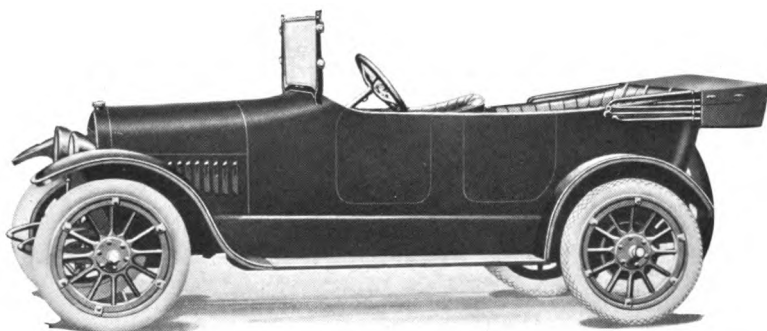


JACKSON TOURING CAR—348

COLOR	Dark green with natural wood wheels	LUBRICATION	Full force feed
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery and dry cells
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Double
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Eight	CLUTCH	Cone
ARRANGED	V type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES . . .	Three
HORSEPOWER	26.45 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	2 $\frac{1}{4}$ x 4 $\frac{1}{4}$ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**JACKSON
AUTOMOBILE
COMPANY**
JACKSON
MICHIGAN

Price \$1685
With Detachable Sedan Top . 1925

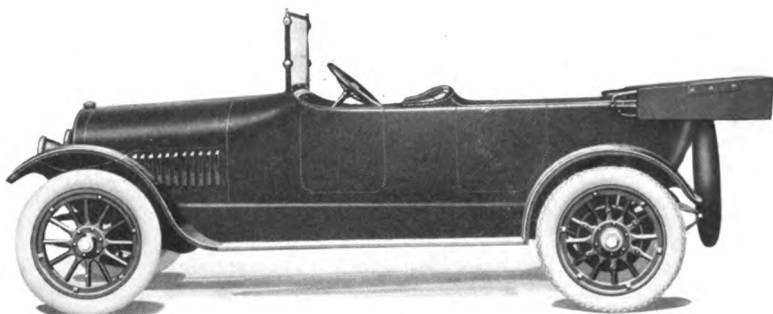

JACKSON TOURING CAR—68


COLOR	Dark blue	BORE AND STROKE . .	3 1/4 x 4 1/2 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	124 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery and dry cells
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 1/2 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 1/2 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Eight	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V type, 90 degrees	CLUTCH	Cone
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	39.2 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**NORDYKE &
MARMON
COMPANY, INC.**

**INDIANAPOLIS
I N D I A N A**

Price \$2750
Four-Passenger Club Roadster . 2700
Three-Passenger Club Roadster . 2700
Five-Passenger Touring Car . 2700

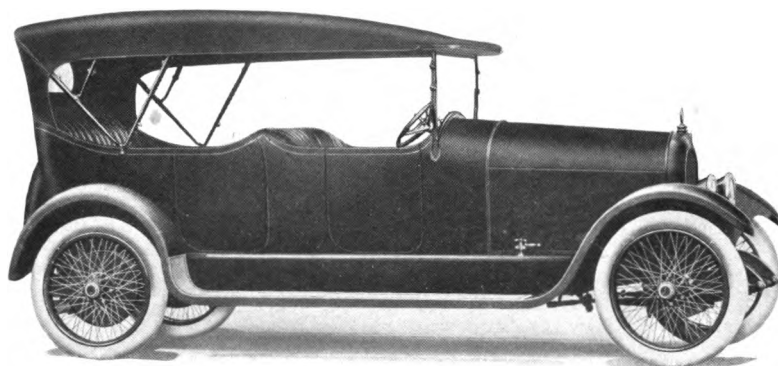


MARMON 34 TOURING CAR

COLOR	Body, dark blue; running gear, black; wheels, cream	BORE AND STROKE	3¼ x 5½ inches
SEATING CAPACITY	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	136 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wire	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4½ inches, cord	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4½ inches, cord	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Twelve
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	33.75	GEAR CHANGES	Three
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and worm wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, clock and extra wheel

**JACKSON
AUTOMOBILE
COMPANY**
**JACKSON
MICHIGAN**

Price \$1685
With Detachable Sedan Top . 1925

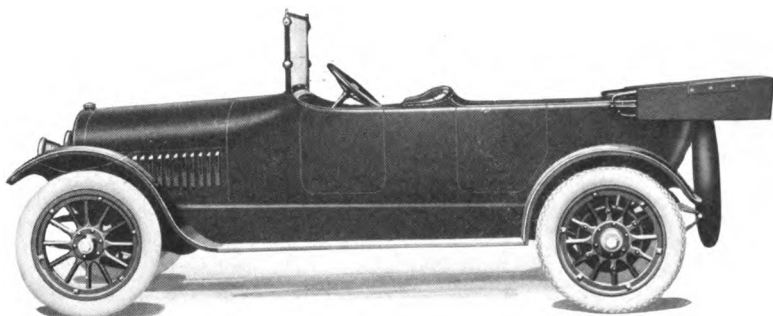

JACKSON TOURING CAR—68


COLOR	Dark blue	BORE AND STROKE . .	3 1/4 x 4 1/4 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Full force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	124 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery and dry cells
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 1/2 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 1/2 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Eight	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V type, 90 degrees	CLUTCH	Cone
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	39.2 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood,
windshield, speedometer, ammeter and demountable rims

**NORDYKE &
MARMON
COMPANY, INC.**

**INDIANAPOLIS
I N D I A N A**

Price \$2750
Four-Passenger Club Roadster . 2700
Three-Passenger Club Roadster . 2700
Five-Passenger Touring Car . . 2700

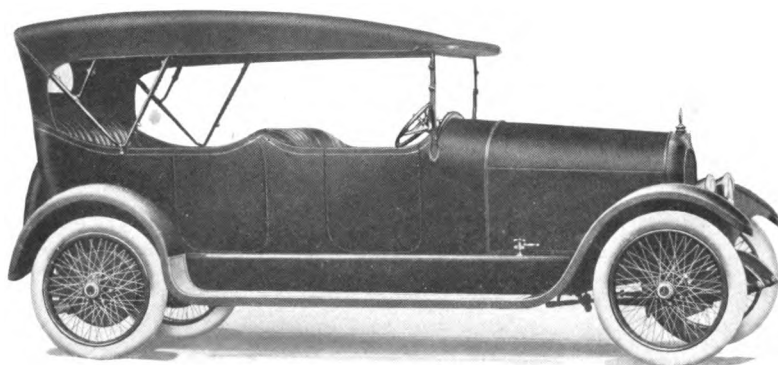

MARMON 34 TOURING CAR

COLOR Body, dark blue;
running gear,
black; wheels,
cream

SEATING CAPACITY Seven persons

POSITION OF DRIVER Left side

WHEELBASE 136 inches

GAUGE 56 inches

WHEELS Wire

FRONT TIRES 34 x 4 1/2 inches,
cord

REAR TIRES 34 x 4 1/2 inches,
cord

SERVICE BRAKE Contracting on
rear wheels

EMERGENCY BRAKE Expanding on
rear wheels

CYLINDERS Six

ARRANGED Vertically

CAST En bloc

HORSEPOWER 33.75
(N. A. C. C. Rating)

BORE AND STROKE 3 3/4 x 5 1/8 inches

LUBRICATION Full force feed

RADIATOR Cellular

COOLING Water pump

IGNITION High-tension
magneto

STARTING SYSTEM Two unit

STARTER OPERATED Gear to fly wheel

LIGHTING SYSTEM Electric

VOLTAGES Twelve

WIRING SYSTEM Single

GASOLINE SYSTEM Gravity

CLUTCH Cone

TRANSMISSION Selective sliding

GEAR CHANGES Three

DRIVE Spiral bevel

REAR AXLE Three-quarters
floating


STEERING GEAR Worm and
worm wheel

In addition to above specifications, price includes top, top hood,
windshield, speedometer, ammeter, clock and extra wheel

**BUICK MOTOR
COMPANY**

**F L I N T
M I C H I G A N**

Price . . . \$985
Roadster . . . 950
Coupe . . . 1350
Sedan . . . 1875

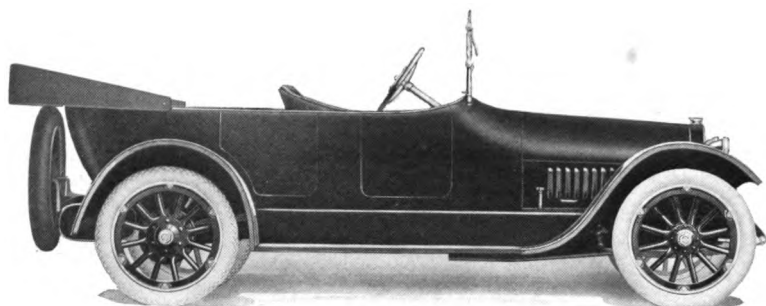


BUICK—D-6-45

COLOR	Blue-black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	115 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	25.35 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3 1/4 x 4 1/4 inches	REAR AXLE	Full floating
		STEERING GEAR . . .	Split nut and worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**BUICK MOTOR
COMPANY**
**F L I N T
M I C H I G A N**

Price . . . \$1485
Roadster . 1450

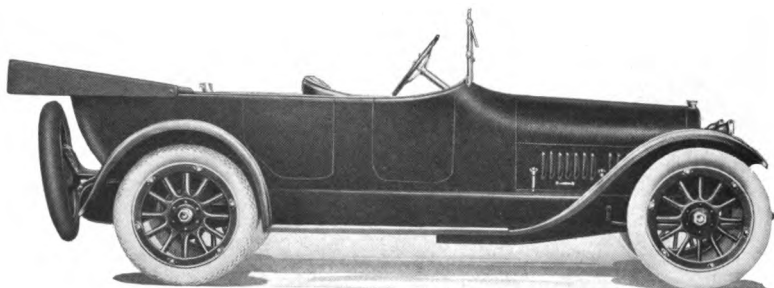


BUICK—D-6-55

COLOR	Royal green with black stripe	LUBRICATION	Splash with circulating pump
SEATING CAPACITY. .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	130 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM. . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	33.75	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE .	3¾ x 5 inches	STEERING GEAR. . .	Split nut and worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**BUICK MOTOR
COMPANY**
**F L I N T
M I C H I G A N**

Price . . . \$985
Roadster . . 950
Coupe . . . 1350
Sedan . . . 1875

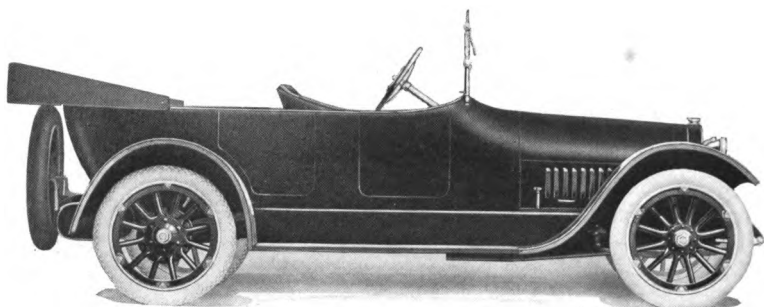


BUICK—D-6-45

COLOR	Blue-black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	115 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	25.35 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¼ x 4½ inches	REAR AXLE	Full floating
		STEERING GEAR	Split nut and worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**BUICK MOTOR
COMPANY**
**F L I N T
M I C H I G A N**

Price . . . \$1485
Roadster . 1450

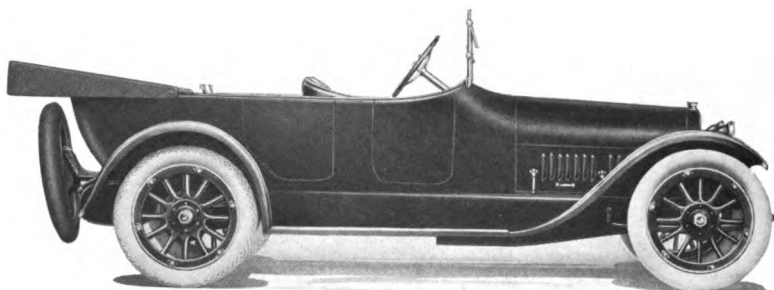

BUICK—D-6-55


COLOR	Royal green with black stripe	LUBRICATION	Splash with circulating pump
SEATING CAPACITY. .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	130 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM. . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	33.75 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¾ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR. . .	Split nut and worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**BUICK MOTOR
COMPANY**

**F L I N T
M I C H I G A N**

Price . . . \$985
Roadster . . 950
Coupe . . . 1350
Sedan . . . 1875

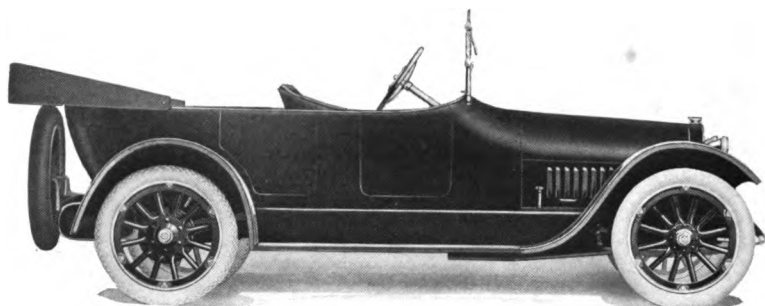

BUICK—D-6-45


COLOR	Blue-black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	115 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	25.35	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE .	3¼ x 4½ inches	STEERING GEAR	Split nut and worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

BUICK MOTOR COMPANY

F L I N T
M I C H I G A N

Price . . . \$1485
Roadster . 1450

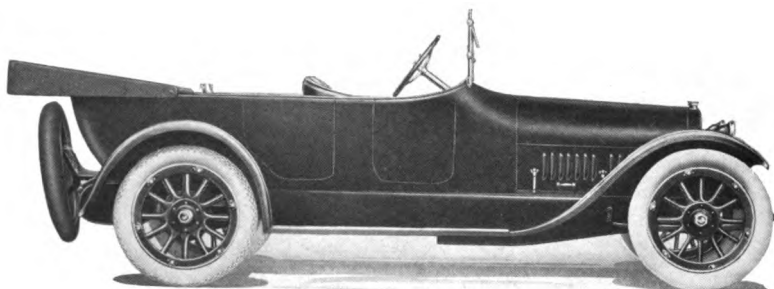

BUICK—D-6-55


COLOR	Royal green with black stripe	LUBRICATION	Splash with circulating pump
SEATING CAPACITY. .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	130 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	33.75 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¾ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR . . .	Split nut and worm

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

**ELKHART
CARRIAGE AND
MOTOR CAR
COMPANY**

**ELKHART
INDIANA**


Price \$795
Runabout . . . \$795

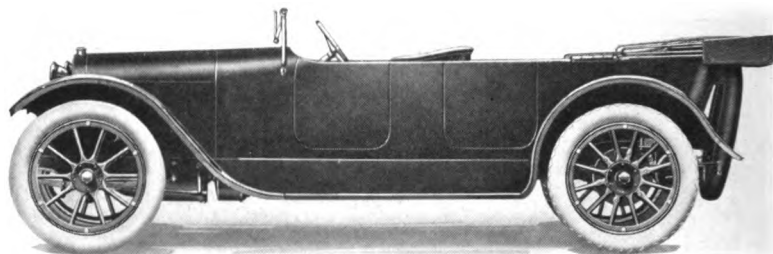

ELCAR TOURING CAR—A

COLOR	Body, black; running gear, gray	BORE AND STROKE	3½ x 5 inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	114 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3½ inches	STARTER OPERATED	Chain to crank-shaft
REAR TIRES	32 x 3½ inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Starting, twelve; lighting, six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	19.6	GEAR CHANGES	Three
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

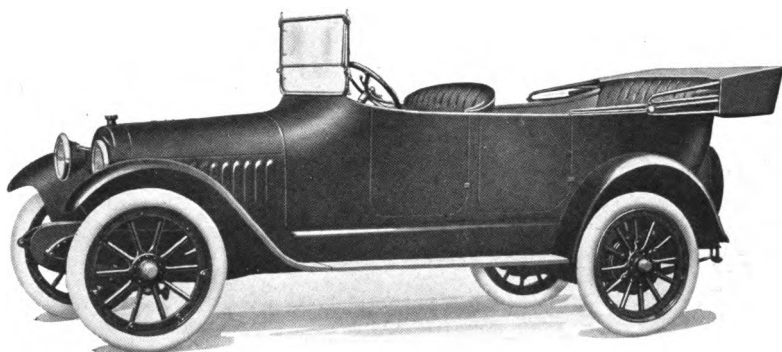

CHALMERS TOURING CAR SIX—40


COLOR	Body, Chalmers meteor blue and coupe green; running gear, black	BORE AND STROKE . .	3¼ x 5 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER.	Left side	RADIATOR	Cellular
WHEELBASE	124 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Six	GASOLINE SYSTEM . .	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	23.44 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three and reverse
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR. . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**CHALMERS
MOTOR
COMPANY**

**DETROIT
MICHIGAN**


Price \$1700
Three-Passenger Roadster 1350
Victoria-Cabriolet 1450

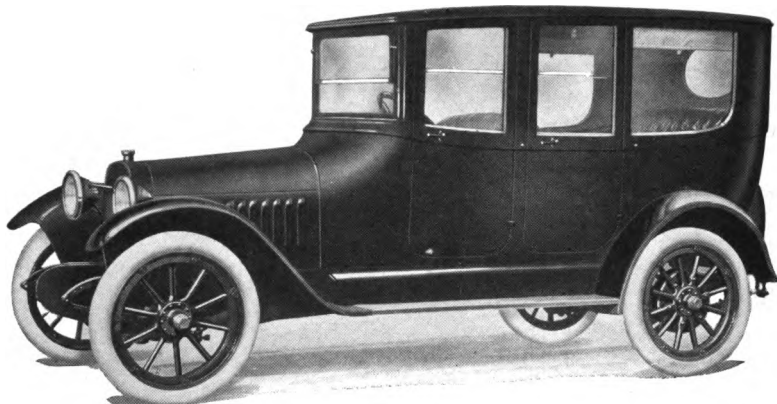

CHALMERS PALANQUIN SIX—40

COLOR	Body, Chalmers meteor blue and coupe green; demountable top, black; running gear, black	HORSEPOWER	23.44 (N. A. C. C. Rating)
SEATING CAPACITY	Seven persons	BORE AND STROKE	3 3/4 x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Force feed and splash
WHEELBASE	124 inches	RADIATOR	Cellular
GAUGE	56 inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	Storage battery
FRONT TIRES	34 x 4 inches	STARTING SYSTEM	Two unit
REAR TIRES	34 x 4 1/2 inches, anti-skid	STARTER OPERATED	Gear to fly wheel
SERVICE BRAKE	Contracting on rear wheels	LIGHTING SYSTEM	Electric
EMERGENCY BRAKE	Expanding on rear wheels	VOLTAGES	Six
CYLINDERS	Six	WIRING SYSTEM	Single
ARRANGED	Vertically	GASOLINE SYSTEM	Gravity
CAST	En bloc	CLUTCH	Dry multiple disc
		TRANSMISSION	Selective sliding
		GEAR CHANGES	Three and reverse
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

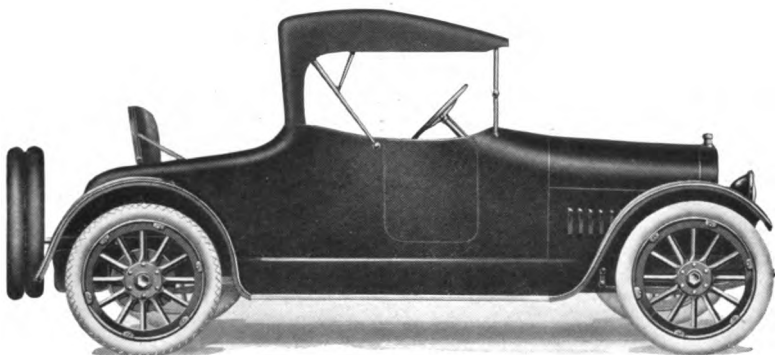

KING CORSAIR—E


COLOR	Deep blue	BORE AND STROKE . .	3 x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . .	Rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Contracting on propeller shaft	WIRING SYSTEM . . .	Single
CYLINDERS	Eight	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V-type, 90 degrees	CLUTCH	Dry plate
CAST	In fours	TRANSMISSION . . .	Selective sliding
HORSEPOWER	28.8 (N. A. C. C. Rating)	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

KING MOTOR CAR COMPANY

Price, \$1150

DETROIT
MICHIGAN

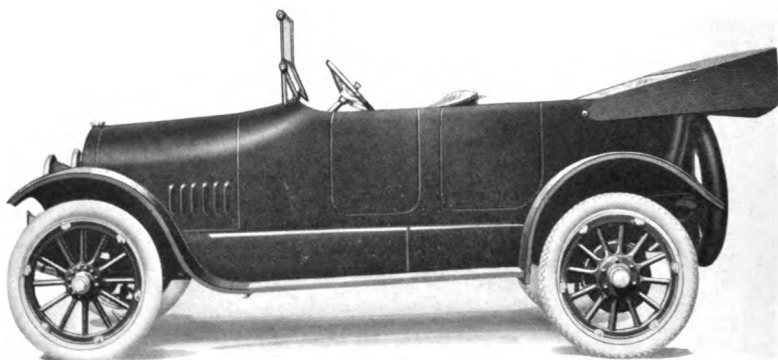


KING RELIANCE—D

COLOR	Body, salon green; chassis, black	BORE AND STROKE	2¼ x 5 inches
SEATING CAPACITY	Five persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	113 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	33 x 4 inches anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
CYLINDERS	Eight	GASOLINE SYSTEM	Vacuum
ARRANGED	V-type, 90 degrees	CLUTCH	Multiple disc in oil
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	26.45 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**KING MOTOR
CAR COMPANY**
DETROIT
MICHIGAN


Price \$1350
Roadster . . . 1350
Sedan 1900

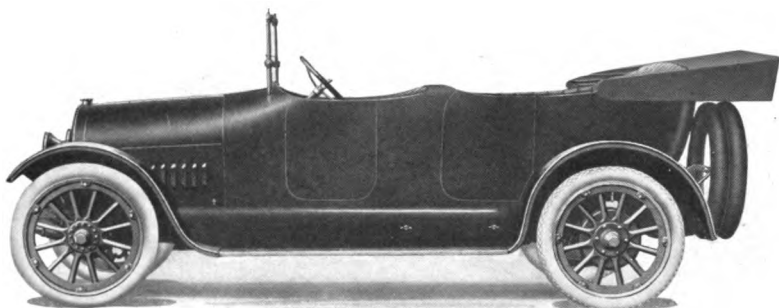

KING CHALLENGER—E

COLOR	Deep blue	BORE AND STROKE . .	3 x 5 inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Contracting on propeller shaft	WIRING SYSTEM . . .	Single
CYLINDERS	Eight	GASOLINE SYSTEM . .	Vacuum
ARRANGED	V-type, 90 degrees	CLUTCH	Dry plate
CAST	In fours	TRANSMISSION	Selective sliding
HORSEPOWER	28.8	GEAR CHANGES . . .	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

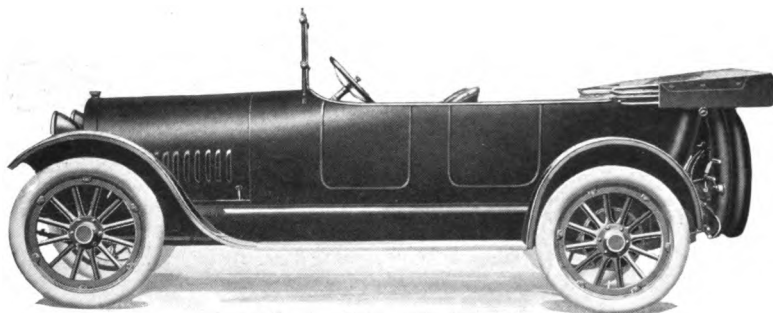

EMPIRE TOURING CAR—60


COLOR	Body, green or gray; running gear, black; wheels, red or green	BORE AND STROKE	3¼ x 4½ inches
SEATING CAPACITY	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	25.35	GEAR CHANGES	Three forward one reverse
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

REGAL MOTOR CAR COMPANY

DETROIT
MICHIGAN

Price . . . \$650
Roadster . 650

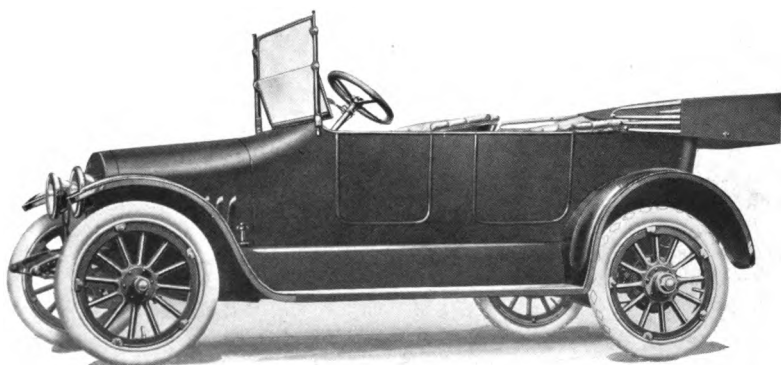


REGAL TOURING CAR—E

COLOR	Body and wheels, blue; fenders and hood, black	BORE AND STROKE	3½ x 4 inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	106 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	30 x 3½ inches	STARTER OPERATED	Chain to crank shaft
REAR TIRES	30 x 3½ inches anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Twelve
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	19.6	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

**AUBURN
AUTOMOBILE
COMPANY**
Auburn, U.S.A. 1930-1931-1932-1933-1934-1935-1936-1937-1938-1939-1940-1941-1942
**AUBURN
INDIANA**

Price \$1050
Three-Passenger Roadster . . . \$1050

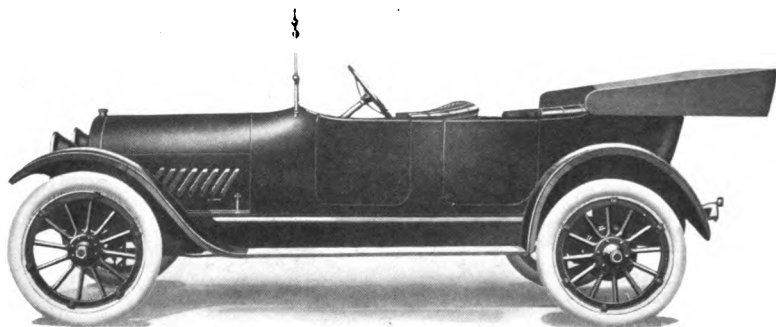


AUBURN TOURING CAR—6-38

COLOR	Body, royal blue; hood, fenders and flashings, black.	BORE AND STROKE . . .	3 x 5 inches
SEATING CAPACITY . .	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . . .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED . .	Gear to fly wheel
REAR TIRES	34 x 4 inches	LIGHTING SYSTEM . . .	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE . .	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM . . .	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.6	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Floating
		STEERING GEAR	Worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, indicator and demountable rims

**A U B U R N
A U T O M O B I L E
C O M P A N Y**
**A U B U R N
I N D I A N A**

Price \$1375
Three-Passenger Roadster . . 1375

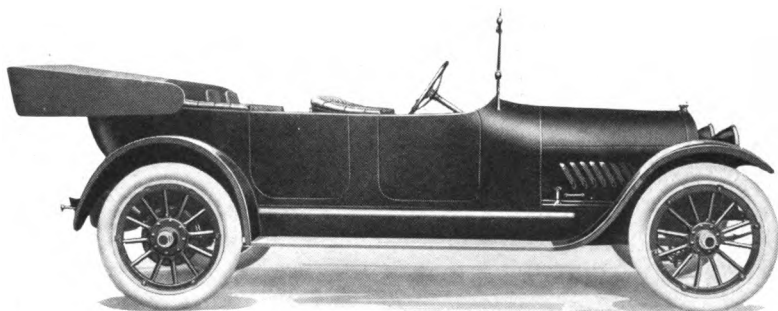


AUBURN TOURING CAR—6-40A

COLOR	Body, royal blue; fenders, hood and flashings, black.	LUBRICATION	Force feed and splash
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	126 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	35 x 4½ inches	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	29.4	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Floating
BORE AND STROKE	3½ x 5 inches	STEERING GEAR	Worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, indicator and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
INDIANAPOLIS
INDIANA

Price, \$2300

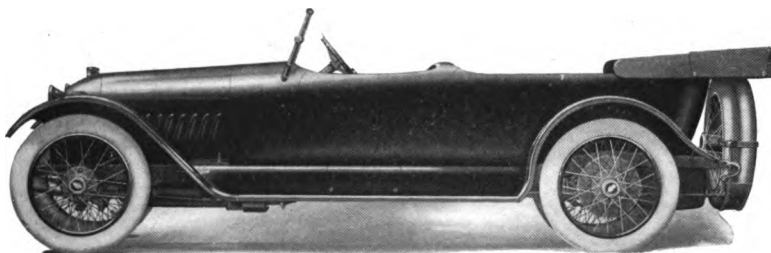


PREMIER TOURING CAR—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	38.4	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE	4 x 5½ inches	STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
INDIANAPOLIS
INDIANA

Price, \$2300

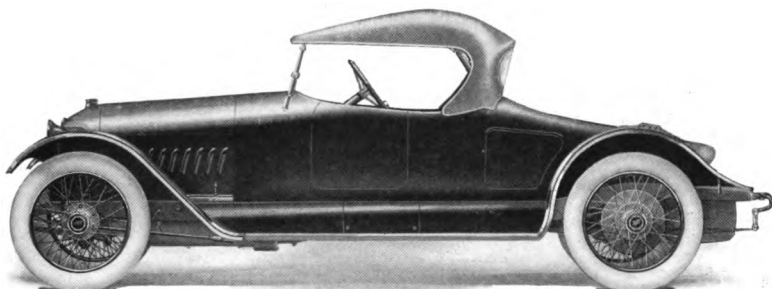


PREMIER ROADSTER—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In three	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	38.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	4 x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
INDIANAPOLIS
INDIANA

Price, \$2300

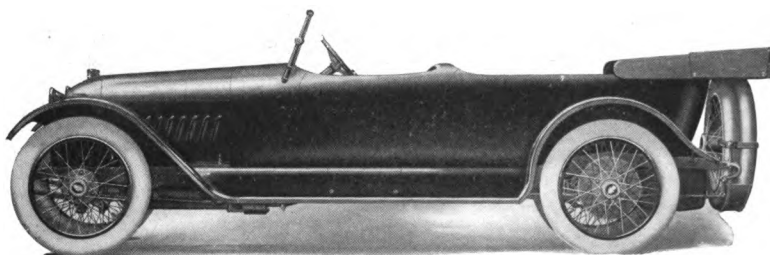

PREMIER TOURING CAR—6-56


COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In three	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	38.4	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE .	4 x 5½ inches	STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**

**INDIANAPOLIS
INDIANA**

Price, \$2300

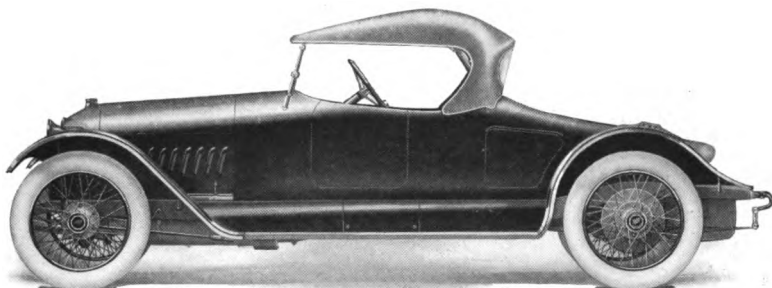


PREMIER ROADSTER—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	38.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	4 x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
INDIANAPOLIS
I N D I A N A

Price \$2300
Four-Passenger Yacht . 2300

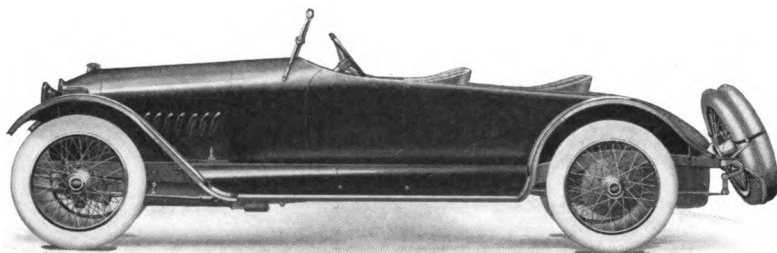


PREMIER CLOVERLEAF ROADSTER—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	38.4	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE . .	4 x 5½ inches	STEERING GEAR . . .	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
INDIANAPOLIS
INDIANA

Price \$2300
Two-Passenger Coupelet . . 2500

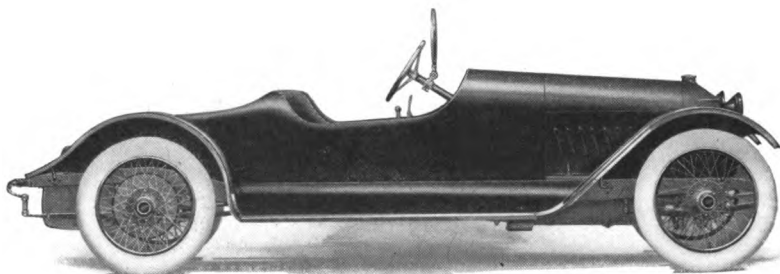


PREMIER SPEEDSTER—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Two persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	38.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	4 x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
CHRYSLER CORPORATION, CHRYSLER BUILDING, NEW YORK, N. Y.
**INDIANAPOLIS
INDIANA**

Price \$2300
Four-Passenger Yacht . 2300

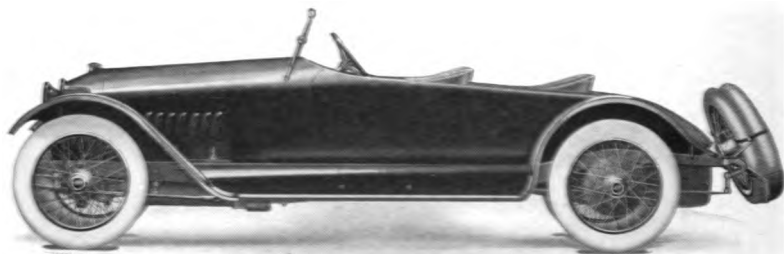


PREMIER CLOVERLEAF ROADSTER—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wire	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	34 x 4 1/2 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 1/2 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	38.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	4 x 5 1/2 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, hood, windshield, speedometer, ammeter and demountable rims

**PREMIER
MOTOR MFG.
COMPANY**
INDIANAPOLIS
INDIANA

Price \$2300
Two-Passenger Coupelet . . 2500

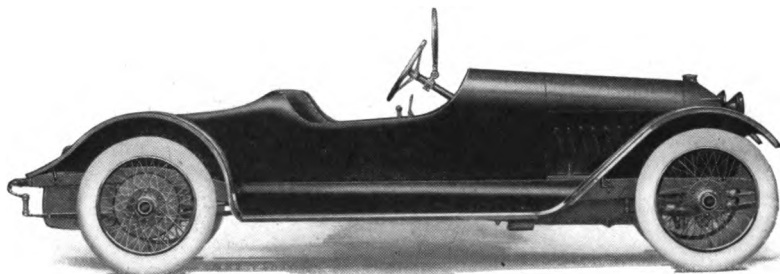


PREMIER SPEEDSTER—6-56

COLOR	Dark gun metal gray	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Two persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	134 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wire	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In threes	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	38.4 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	4 x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**M E R C E R
A U T O M O B I L E
C O M P A N Y
T R E N T O N
N E W J E R S E Y**

Price, \$2900

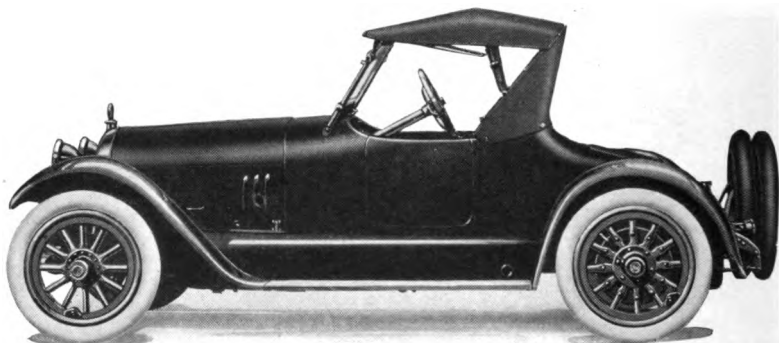

MERCER RUNABOUT—22-72


COLOR	Blue, green, gray or maroon	LUBRICATION	Force feed
SEATING CAPACITY	Two persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	115 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Fly-wheel gen- erator and motor
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches	VOLTAGES	Twelve
SERVICE BRAKE	Expanding on drive shaft	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Four forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3¼ x 6¾ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter, clock and demountable rims

**M E R C E R
A U T O M O B I L E
C O M P A N Y**

**T R E N T O N
N E W J E R S E Y**

Price \$2750

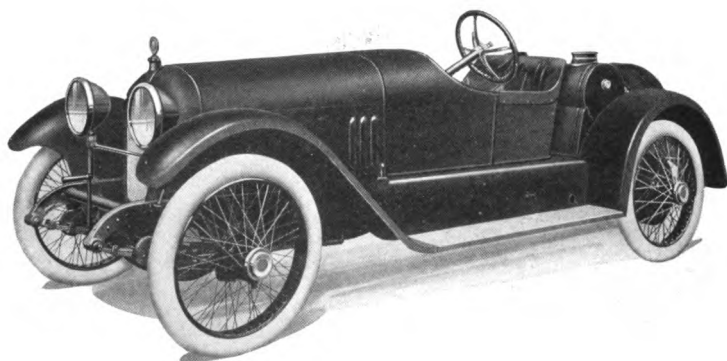


MERCER RACEABOUT—22-72

COLOR	Yellow, gray or blue	BORE AND STROKE . .	3¾ x 6¾ inches
SEATING CAPACITY . .	Two persons	LUBRICATION	Force feed
POSITION OF DRIVER .	Left side	RADIATOR	Cellular
WHEELBASE	115 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wire	LIGHTING SYSTEM . .	Electric
FRONT TIRES	32 x 4 inches	VOLTAGES	Twelve
REAR TIRES	32 x 4 inches	GASOLINE SYSTEM . .	Vacuum
SERVICE BRAKE . . .	Expanding on drive shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE . .	Expanding on rear wheels	TRANSMISSION . . .	Selective sliding
CYLINDERS	Four	GEAR CHANGES . . .	Four forward, one reverse
ARRANGED	Vertically	DRIVE	Spiral bevel
CAST	En bloc	REAR AXLE	Full floating
HORSEPOWER	22.5	STEERING GEAR . . .	Worm and gear
(N. A. C. C. Rating)			

In addition to above specifications, price includes speedometer, clock and wire wheels

**M E R C E R
A U T O M O B I L E
C O M P A N Y
T R E N T O N
N E W J E R S E Y**

Price, \$2900

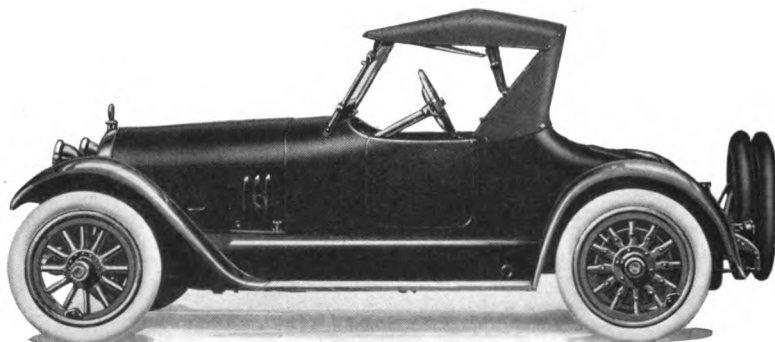

MERCER RUNABOUT—22-72


COLOR	Blue, green, gray or maroon	LUBRICATION	Force feed
SEATING CAPACITY	Two persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	115 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Fly-wheel gen- erator and motor
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 4 inches	VOLTAGES	Twelve
SERVICE BRAKE	Expanding on drive shaft	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Four forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3 $\frac{3}{4}$ x 6 $\frac{3}{4}$ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter, clock and demountable rims

**M E R C E R
A U T O M O B I L E
C O M P A N Y**

**T R E N T O N
N E W J E R S E Y**

Price \$2750

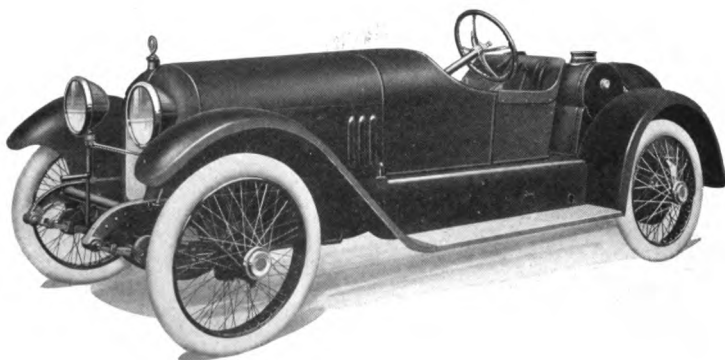


MERCER RACEABOUT—22-72

COLOR	Yellow, gray or blue	BORE AND STROKE	3¾ x 6¾ inches
SEATING CAPACITY	Two persons	LUBRICATION	Force feed
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	115 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wire	LIGHTING SYSTEM	Electric
FRONT TIRES	32 x 4 inches	VOLTAGES	Twelve
REAR TIRES	32 x 4 inches	GASOLINE SYSTEM	Vacuum
SERVICE BRAKE	Expanding on drive shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Four forward, one reverse
ARRANGED	Vertically	DRIVE	Spiral bevel
CAST	En bloc	REAR AXLE	Full floating
HORSEPOWER	22.5 (N. A. C. C. Rating)	STEERING GEAR	Worm and gear

In addition to above specifications, price includes speedometer, clock and wire wheels

**M E R C E R
A U T O M O B I L E
C O M P A N Y**
**T R E N T O N
N E W J E R S E Y**

Price \$3000
Four-Passenger Sporting . 3000

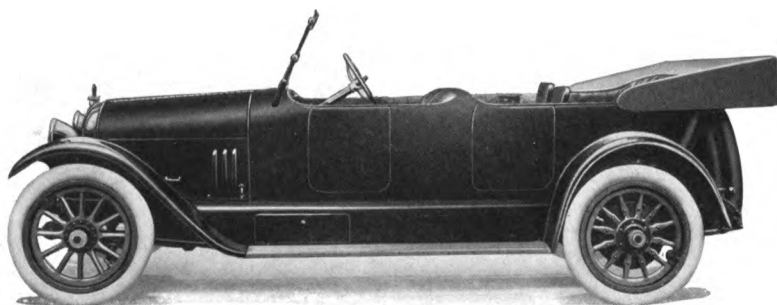

MERCER TOURING CAR—22-72


COLOR	Brown, blue, green, gray or red	LUBRICATION	Force feed
SEATING CAPACITY .	Six persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	132 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Fly wheel gen- erator and motor
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches	VOLTAGES	Twelve
SERVICE BRAKE . . .	Expanding on drive shaft	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Four forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¼ x 6¼ inches	REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and gear

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter, clock and demountable rims

**BRISCOE
MOTOR
COMPANY, INC.**

**JACKSON
MICHIGAN**

Price \$750
Three-Passenger Cloverleaf Road-
ster 750

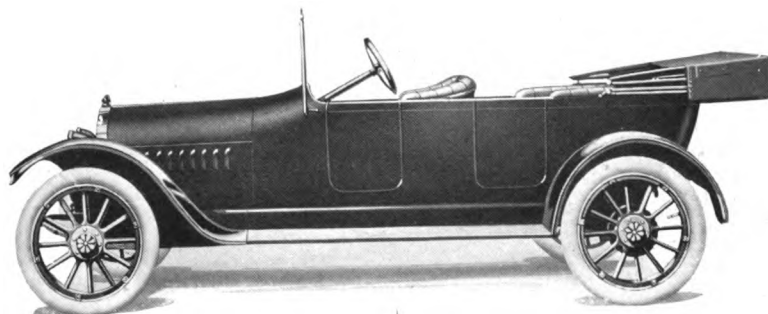

BRISCOE TOURING CAR—4-38


COLOR	Body, royal Briscoe green; running gear, black; wheels, cream	BORE AND STROKE	3 $\frac{7}{8}$ x 5 $\frac{1}{2}$ inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	114 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3 $\frac{1}{2}$ inches	STARTER OPERATED	Chain to transmission shaft
REAR TIRES	32 x 3 $\frac{1}{2}$ inches	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Starting, twelve; lighting, six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	18.9	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

**BRISCOE
MOTOR
COMPANY, INC.**

**JACKSON
MICHIGAN**

Price \$950
Three-Passenger Cloverleaf Road-
ster 950

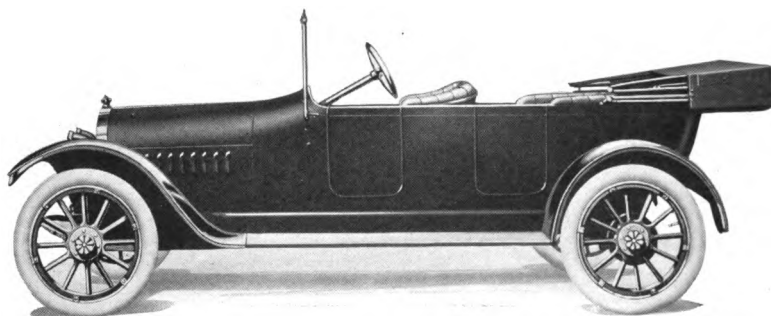


BRISCOE TOURING CAR—8-38

COLOR	Body, royal Briscoe green; running gear, black; wheels, cream	LUBRICATION	Full force feed
SEATING CAPACITY	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	114 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Chain to transmission shaft
FRONT TIRES	32 x 3½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	32 x 3½ inches	VOLTAGES	Starting, twelve; lighting, six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Eight	CLUTCH	Cone
ARRANGED	V-type, 90 degrees	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	28.8 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 x 3½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, hood, windshield, speedometer and demountable rims

**CONSOLIDATED
CAR COMPANY**
**DETROIT
MICHIGAN**

Price	\$1195
Two-Passenger Speedster . . .	1195
Four-Passenger Open-Type Roadster	250
Four-Passenger Motor Coach . .	1495
Five-Passenger Touring Sedan .	1795

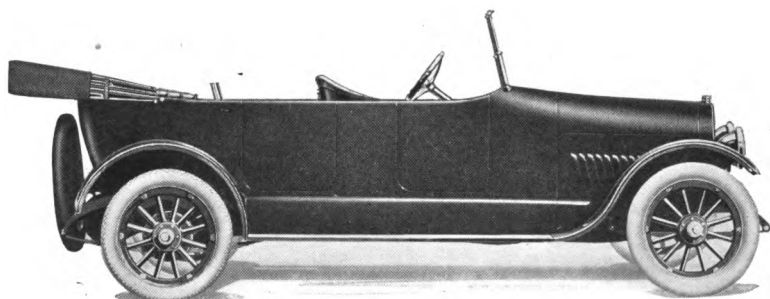

ABBOTT-DETROIT TOURING CAR—6-44


COLOR	Black with cream wheels	LUBRICATION	Pump over and splash
SEATING CAPACITY .	Seven persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	32 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	32 x 4 inches	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Six	CLUTCH	Dry plate
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, and reverse
HORSEPOWER	25.35 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE . .	3¼ x 4½ inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and wheel

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**CONSOLIDATED
CAR COMPANY**

**DETROIT
MICHIGAN**

Price \$1950
Racy Roadster . 1950

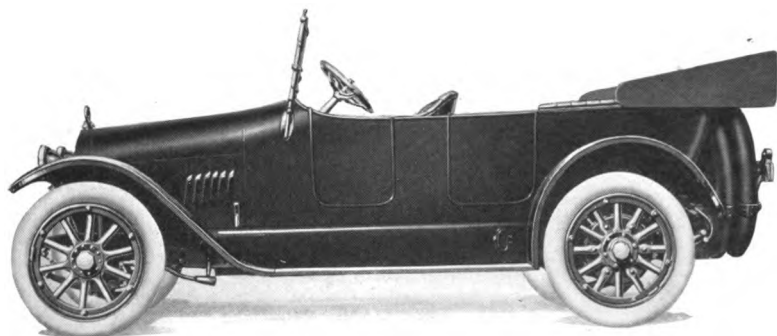

ABBOTT-DETROIT TOURING CAR—8-80

COLOR	Royal green	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	Storage battery and dry cells
WHEELBASE	121 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	35 x 4½ inches	VOLTAGES	Six
REAR TIRES	35 x 4½ inches	WIRING SYSTEM	Double
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Vacuum
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Eight	TRANSMISSION	Selective sliding
ARRANGED	V-type, 90 degrees	GEAR CHANGES	Three forward, one reverse
CAST	In fours	DRIVE	Spiral bevel
HORSEPOWER	33.8 (N. A. C. C. Rating)	REAR AXLE	Three-quarters floating
BORE AND STROKE	3¼ x 5 inches	STEERING GEAR	Worm and wheel
LUBRICATION	Force feed and splash		


In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, voltmeter, clock and demountable rims

KISSEL MOTOR CAR COMPANY

STANDARD, TOUR, LIGHT, ROADSTER, PASSENGER, ALL-YEAR, ROADSTER

**HARTFORD
WISCONSIN**

Price \$1050
Four-Passenger Roadster 1150
Four-Passenger All-Year Road-
ster 1450

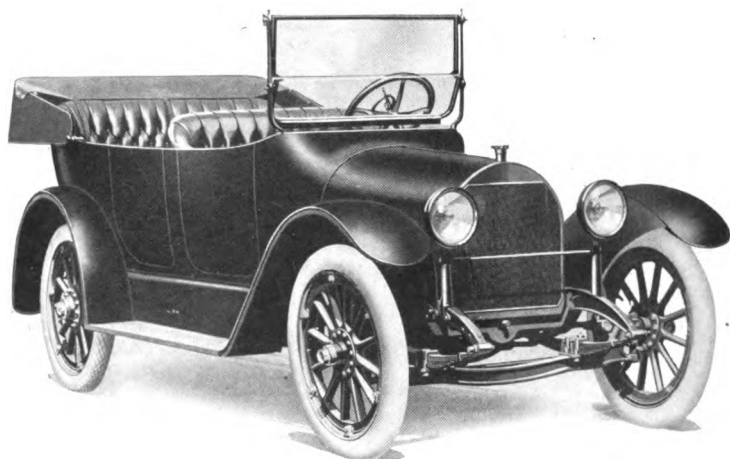


KISSEL-KAR TOURING CAR—4-32

COLOR	Blue and black	BORE AND STROKE	3 $\frac{3}{4}$ x 5 $\frac{1}{2}$ inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Square tube
WHEELBASE	115 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	33 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	33 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	24.03 (N. A. C. C. Rating)	GEAR CHANGES	Three
		DRIVE	Spiral bevel
		REAR AXLE	Full floating
		STEERING GEAR	Split nut and worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter and demountable rims

**KISSEL MOTOR
CAR COMPANY**
**HARTFORD
WISCONSIN**

Price	\$2000
Four-Door Five-Passenger Touring	1485
Four-Door Seven-Passenger Touring	1585
Three-Door Five-Passenger Touring	1650
Three-Door Seven-Passenger Touring	1750
Roadster	1650
Roadster Coupe	2000

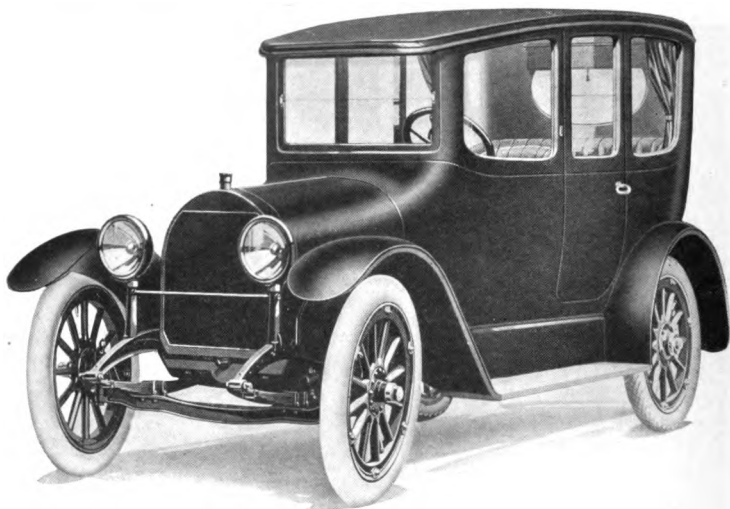

KISSEL-KAR ALL-YEAR—6-42

COLOR	Blue and black
SEATING CAPACITY	Five persons
POSITION OF DRIVER	Left side
WHEELBASE	126 inches
GAUGE	56 inches
WHEELS	Wood
FRONT TIRES	34 x 4 inches
REAR TIRES	3½ x 4 inches, non-skid
SERVICE BRAKE	Contracting on rear wheels
EMERGENCY BRAKE	Contracting on rear wheels
CYLINDERS	Six
ARRANGED	Vertically
CAST	En bloc
HORSEPOWER	31.54 (N. A. C. C. Rating)
BORE AND STROKE	3¾ x 5½ inches


LUBRICATION	Splash with circulating pump
RADIATOR	Square tube
COOLING	Water pump
IGNITION	High-tension magneto and storage battery
STARTING SYSTEM	Single unit
STARTER OPERATED	Gear to fly wheel
LIGHTING SYSTEM	Electric
VOLTAGES	Six
WIRING SYSTEM	Single
GASOLINE SYSTEM	Vacuum
CLUTCH	Cone
TRANSMISSION	Selective sliding
GEAR CHANGES	Three
DRIVE	Spiral bevel
REAR AXLE	Full floating
STEERING GEAR	Split nut worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter, clock and demountable rims

**LEWIS SPRING
AND AXLE
COMPANY**

**JACKSON
AND CHELSEA
MICHIGAN**

Price, \$985

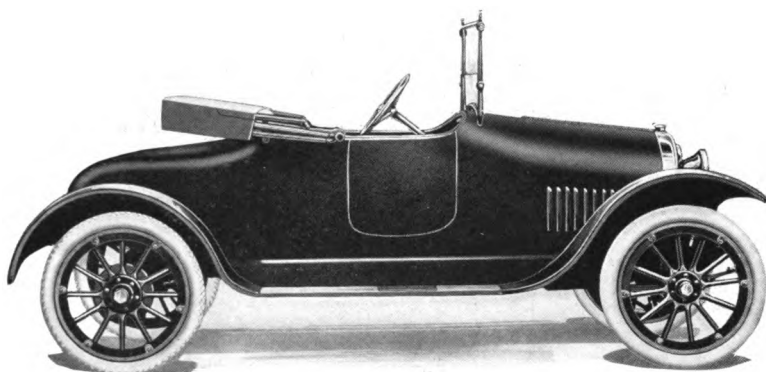

HOLLIER ROADSTER—158


COLOR	Optional	LUBRICATION	Force feed
SEATING CAPACITY	Three persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	112 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	33 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	33 x 4 inches	VOLTAGES	Six and twelve
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Eight	CLUTCH	Cone
ARRANGED	V-type, 90 degrees	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	28.8 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 x 4¼ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and worm gear

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**LEWIS SPRING
AND AXLE
COMPANY**

**JACKSON
AND CHELSEA
MICHIGAN**

Price, \$985

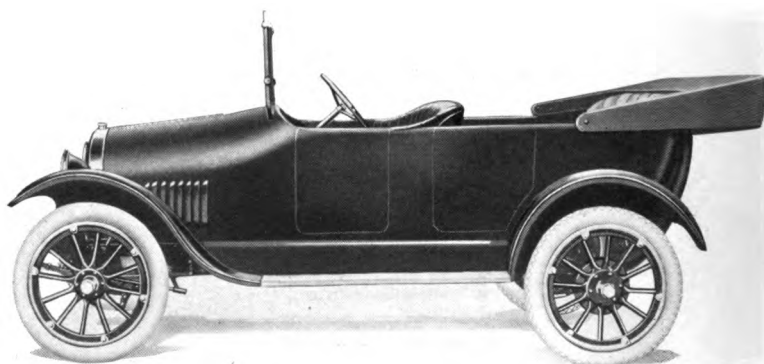


HOLLIER TOURING CAR—168

COLOR	Optional	LUBRICATION	Force feed
SEATING CAPACITY	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	112 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Single unit
WHEELS	Wood	STARTER OPERATED	Chain to crankshaft
FRONT TIRES	33 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	33 x 4 inches	VOLTAGES	Six and twelve
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Eight	CLUTCH	Cone
ARRANGED	V-type, 90 degrees	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	28.8 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 x 4 1/4 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and worm gear

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter, clock and demountable rims

**THE WINTON
C O M P A N Y**
WINTON MOTOR CARS, WINTON, OHIO
CLEVELAND, OHIO

Price	\$2285
Four-Passenger Touring	2285
Six-Passenger Touring	2435
Seven-Passenger Touring	2335
Runabout	2285
Three-Quarter Limousine	3250
Full Four-Door Limousine	3500
Sedan	3500
Limousine Landaulet	3500
Coupe	3200

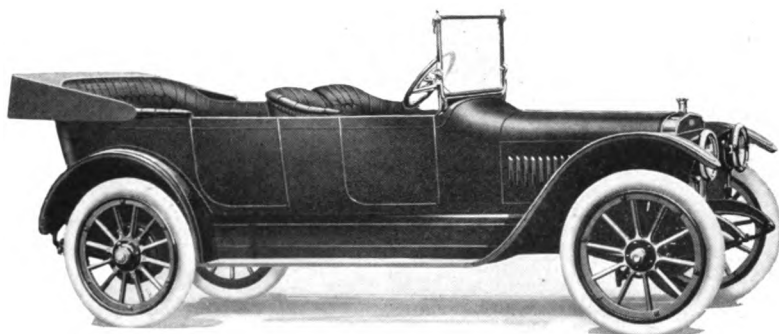


WINTON SIX-33 TOURING CAR

COLOR	Optional	LUBRICATION	Force feed
SEATING CAPACITY	Five persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	128 inches	IGNITION	High-tension magneto and storage battery
GAUGE	58 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	36 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	36 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Four
HORSEPOWER	33.75 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	3¾ x 5¼ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

**THE WINTON
C O M P A N Y**
INCORPORATED IN OHIO
CLEVELAND, OHIO

Price	\$3500
Four-Passenger Touring	3500
Five-Passenger Touring	3500
Six-Passenger Touring	3500
Two-Passenger Roadster	3500
Runabout	3500
Three-Quarter Limousine	4500
Full Four-Door Limousine	4750
Sedan	4750
Limousine Landaulet	4750
Coupe	4500

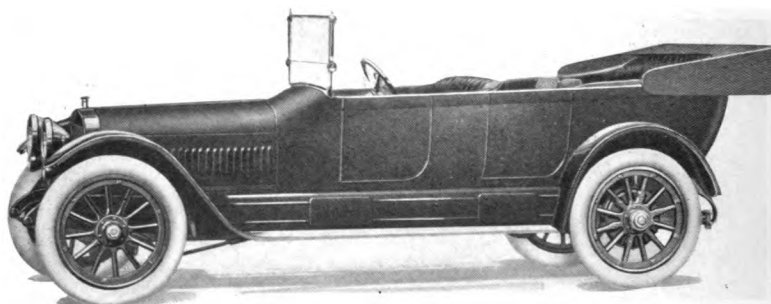

WINTON SIX-48 TOURING CAR


COLOR	Optional	LUBRICATION	Force feed
SEATING CAPACITY	Seven persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	138 inches	IGNITION	High-tension magneto and storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Gear to fly wheel
FRONT TIRES	37 x 5 inches	LIGHTING SYSTEM	Electric
REAR TIRES	37 x 5 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Six	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Four
HORSEPOWER	48.6 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE	4½ x 5½ inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, top hood, wind-shield, speedometer, ammeter, voltmeter, clock and demountable rims

AUSTIN AUTOMOBILE COMPANY

GRAND RAPIDS
MICHIGAN

Price	\$2800
Four-Passenger Roadster . . .	2800
Sedan	3800
Vestibule-Brougham	4000

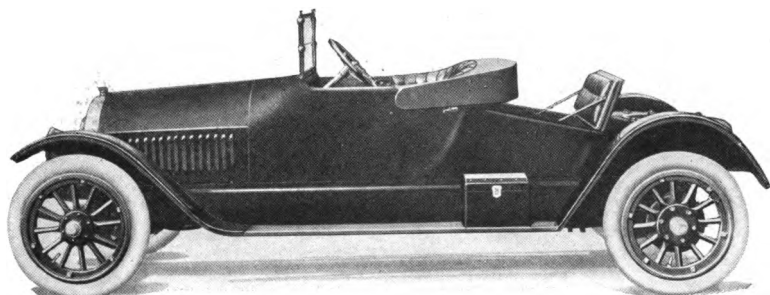


AUSTIN HIGHWAY KING—36-66

COLOR	Body, black; running gear, yellow	RADIATOR	Cellular
SEATING CAPACITY	Six persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	Storage battery
WHEELBASE	142 inches	STARTING SYSTEM	Two unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood or wire	LIGHTING SYSTEM	Electric
FRONT TIRES	34 x 4½ inches	VOLTAGES	Six
REAR TIRES	34 x 4½ inches	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Vacuum
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Six forward, two reverse
CAST	En bloc	DRIVE	Plain bevel
HORSEPOWER	36.04 (N. A. C. C. Rating)	REAR AXLE	Two-speed, full-floating
BORE AND STROKE	3⅞ x 5¼ inches	STEERING GEAR	Worm and sector
LUBRICATION	Force feed and splash		

In addition to above specifications, price includes top, top hood, wind-
shield, speedometer, ammeter, clock and demountable rims

**THE WHITE
COMPANY**
CLEVELAND, OHIO

Price	\$2700
Roadster	2650
Town Car	4000
Town Car Landaulet	4000
Sedan	4000

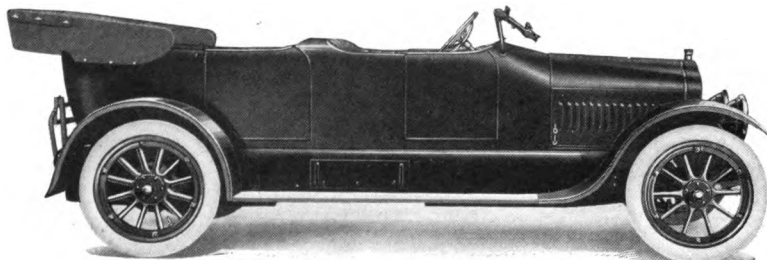


WHITE TOURING CAR—30

COLOR	White special maroon, White special gray, Cleveland gray, Brewster green or cobalt blue	BORE AND STROKE	3¼ x 5½ inches
SEATING CAPACITY	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Honeycomb
WHEELBASE	115 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 4 inches	STARTER OPERATED	Chain to fly wheel sprocket
REAR TIRES	32 x 4 inches	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Twenty-one
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Double
CYLINDERS	Four	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Single plate in oil
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	22.5 (N. A. C. C. Rating)	GEAR CHANGES	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

**THE WHITE
COMPANY**
CLEVELAND, OHIO

Price	\$4000
Seven-Passenger Touring . .	2700
Three-Passenger Roadster .	2650
Sedan	4000
Town Car	4000

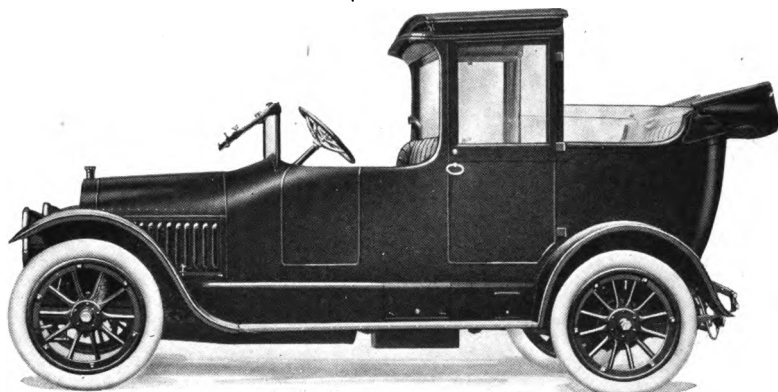


WHITE TOWN CAR LANDAULET—30

COLOR	White special maroon, White special gray, Cleveland gray, Brewster green or cobalt blue	BORE AND STROKE . .	3¼ x 5½ inches
SEATING CAPACITY .	Six persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Honeycomb
WHEELBASE	115 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	32 x 4 inches	STARTER OPERATED .	Chain to fly wheel sprocket
REAR TIRES	32 x 4 inches,	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Twenty-one
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Four	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Single plate in oil
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	22.5 (N. A. C. C. Rating)	GEAR CHANGES . . .	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes windshield, speedometer, clock and demountable rims

**THE WHITE
COMPANY**
CLEVELAND, OHIO

Price	\$3900
Limousine	5200
Landaulet Limousine	5200
Semi-Touring	5300

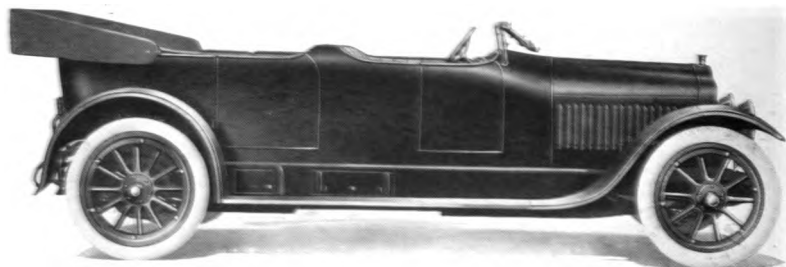

WHITE TOURING CAR—45


COLOR	White special maroon, White special gray, Cleveland gray, Brewster green or cobalt blue
SEATING CAPACITY	Seven persons
POSITION OF DRIVER	Left side
WHEELBASE	133½ inches
GAUGE	56 inches
WHEELS	Wood
FRONT TIRES	36 x 4½ inches
REAR TIRES	36 x 4½ inches
SERVICE BRAKE	Contracting on rear wheels
EMERGENCY BRAKE	Expanding on rear wheels
CYLINDERS	Four
ARRANGED	Vertically
CAST	En bloc
HORSEPOWER	28.9 (N. A. C. C. Rating)

BORE AND STROKE	4¼ x 6¾ inches
LUBRICATION	Force feed and splash
RADIATOR	Honeycomb
COOLING	Water pump
IGNITION	High-tension magneto
STARTING SYSTEM	Single unit
STARTER OPERATED	Chain to fly-wheel sprocket
LIGHTING SYSTEM	Electric
VOLTAGES	Twenty-one
WIRING SYSTEM	Double
GASOLINE SYSTEM	Vacuum
CLUTCH	Single plate in oil
TRANSMISSION	Selective sliding
GEAR CHANGES	Four forward, one reverse
DRIVE	Plain bevel
REAR AXLE	Semi-floating
STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, hood, windshield, speedometer, clock and demountable rims

**THE WHITE
COMPANY**
CLEVELAND, OHIO

Price \$5200
Landaulet Limousine 5200
Semi-touring 5300
Touring 3800

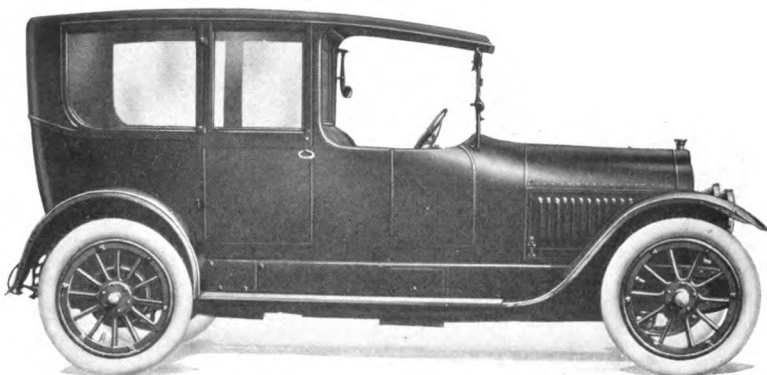


WHITE LIMOUSINE—45

COLOR	White special maroon, White special gray, Cleveland gray, Brewster green or cobalt blue	BORE AND STROKE . .	4¼ x 6¾ inches
SEATING CAPACITY .	Seven persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Honeycomb
WHEELBASE	133¾ inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	STARTING SYSTEM . .	Single unit
FRONT TIRES	36 x 4½ inches	STARTER OPERATED .	Chain to fly wheel sprocket
REAR TIRES	36 x 4½ inches	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Twenty-one
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Double
CYLINDERS	Four	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Single plate in oil
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	28.9 (N. A. C. C. Rating)	GEAR CHANGES . . .	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes windshield, speedometer, clock and demountable rims

**A V E R Y
C O M P A N Y
P E O R I A
I L L I N O I S**


Price \$1095
Five-Passenger Touring . . 1095
Sedan 1295

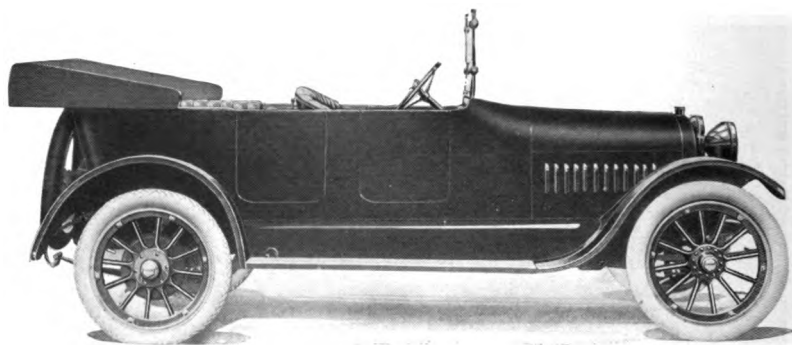

GLIDE LIGHT SIX-40 TOURING CAR

COLOR	Body, Meteor blue; running-gear, black	BORE AND STROKE . .	3 x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	119 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM .	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM .	Electric
SERVICE BRAKE . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . .	Single
CYLINDERS	Six	GASOLINE SYSTEM .	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION . .	Selective sliding
HORSEPOWER	21.6 (N. A. C. C. Rating)	GEAR CHANGES . .	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR . .	Screw and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

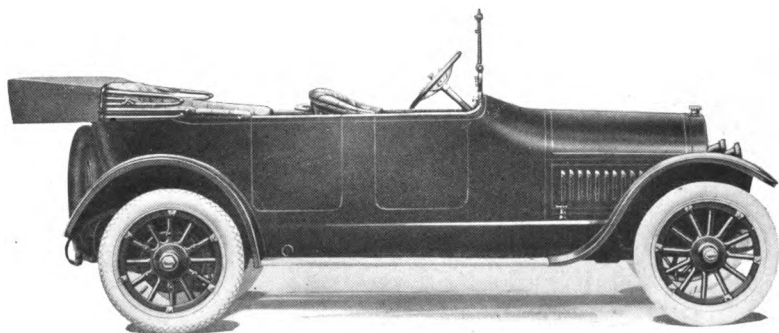


MARION TOURING CAR—K

COLOR	Wine with gold stripe, and black fenders	BORE AND STROKE . .	3 x 5 inches
SEATING CAPACITY .	Five persons	LUBRICATION	Force feed and splash
POSITION OF DRIVER.	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM . .	Two unit
FRONT TIRES	32 x 4 inches	STARTER OPERATED .	Gear to fly wheel
REAR TIRES	32 x 4 inches, anti-skid	LIGHTING SYSTEM . .	Electric
SERVICE BRAKE . . .	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE .	Expanding on rear wheels	WIRING SYSTEM . . .	Single
CYLINDERS	Six	GASOLINE SYSTEM . .	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION . . .	Selective sliding
HORSEPOWER	21.6	GEAR CHANGES . . .	Three forward and reverse
(N. A. C. C. Rating)		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**PEERLESS
MOTOR CAR
COMPANY**
CLEVELAND, OHIO


Price \$1890
Three-Passenger Roadster . . 1890
Seven-Passenger Limousine . 3060

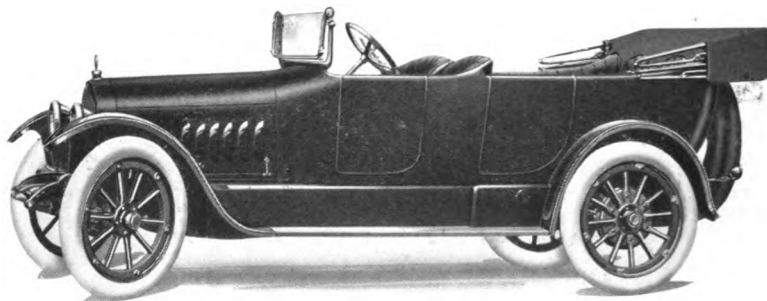

PEERLESS TOURING—56

COLOR	Green	LUBRICATION	Full-force feed
SEATING CAPACITY .	Seven persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	125 inches	IGNITION	Storage battery and dry cells
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	35 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 4½ inches, anti-skid	VOLTAGES	Seven
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Eight	CLUTCH	Dry multiple disc
ARRANGED	V-type, 90 degrees	TRANSMISSION	Selective sliding
CAST	In fours	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	33.8 (N. A. C. C. Rating)	DRIVE	Spiral bevel
BORE AND STROKE .	3¼ x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter and demountable rims

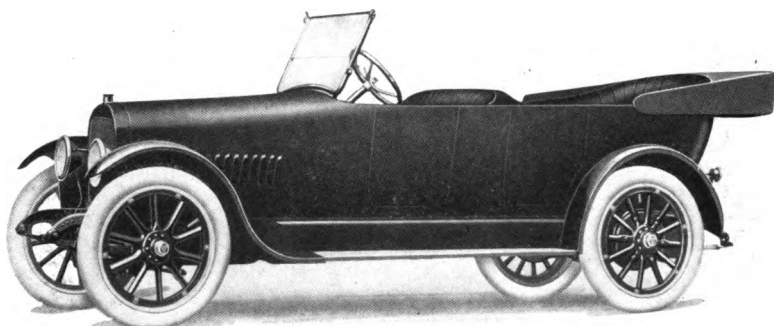


HUDSON SUPER-SIX PHAETON

COLOR	Blue	RADIATOR	Cellular
SEATING CAPACITY	Seven persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	Storage battery and generator
WHEELBASE	125½ inches	STARTING SYSTEM	Single unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	35 x 4½ inches	VOLTAGES	Six
REAR TIRES	35 x 4½ inches, anti-skid	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Vacuum
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
CAST	En bloc	DRIVE	Spiral bevel
HORSEPOWER	29.4 (N. A. C. C. Rating)	REAR AXLE	Live
BORE AND STROKE	3½ x 5 inches	STEERING GEAR	Worm and worm wheel
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

**HUDSON
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price, \$1900

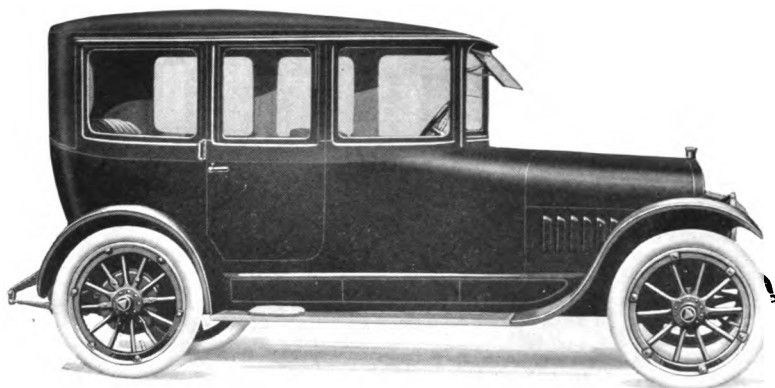


HUDSON SUPER-SIX TOURING SEDAN

COLOR	Blue	RADIATOR	Cellular
SEATING CAPACITY . .	Seven persons	COOLING	Water pump
POSITION OF DRIVER .	Left side	IGNITION	Storage battery and generator
WHEELBASE	125½ inches	STARTING SYSTEM . .	Single unit
GAUGE	56 inches	STARTER OPERATED .	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM . .	Electric
FRONT TIRES	35 x 4½ inches	VOLTAGES	Six
REAR TIRES	35 x 4½ inches, anti-skid	WIRING SYSTEM . . .	Single
SERVICE BRAKE . . .	Contracting on rear wheels	GASOLINE SYSTEM . .	Vacuum
EMERGENCY BRAKE . .	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Three forward, one reverse
CAST	En bloc	DRIVE	Spiral bevel
HORSEPOWER	29.4 (N. A. C. C. Rating)	REAR AXLE	Live
BORE AND STROKE . .	3½ x 5 inches	STEERING GEAR . . .	Worm and worm wheel
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes windshield, speedometer, ammeter and demountable rims

**HUDSON
MOTOR CAR
COMPANY**
DETROIT
MICHIGAN

Price, . . . \$1675
Roadster . 1375

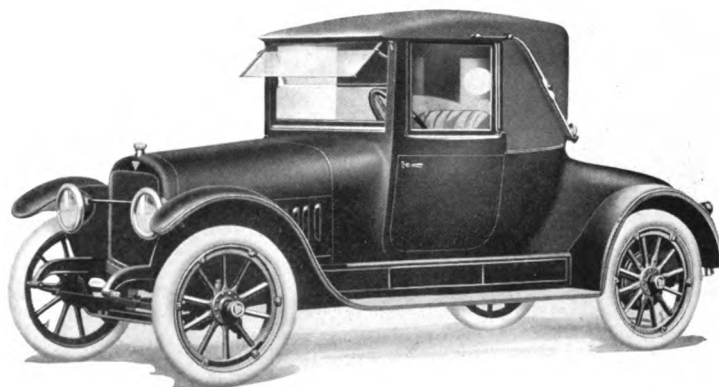

HUDSON SUPER-SIX CABRIOLET


COLOR	Blue	RADIATOR	Cellular
SEATING CAPACITY	Three persons	COOLING	Water pump
POSITION OF DRIVER	Left side	IGNITION	Storage battery and generator
WHEELBASE	125½ inches	STARTING SYSTEM	Single unit
GAUGE	56 inches	STARTER OPERATED	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM	Electric
FRONT TIRES	35 x 4½ inches	VOLTAGES	Six
REAR TIRES	35 x 4½ inches, anti-skid	WIRING SYSTEM	Single
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Vacuum
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
CAST	En bloc	DRIVE	Spiral bevel
HORSEPOWER	29.4 (N. A. C. C. Rating)	REAR AXLE	Live
BORE AND STROKE	3½ x 5 inches	STEERING GEAR	Worm and worm wheel
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter and demountable rims

HUDSON MOTOR CAR COMPANY

DETROIT
MICHIGAN

Price \$2500
Town Car . . 2500

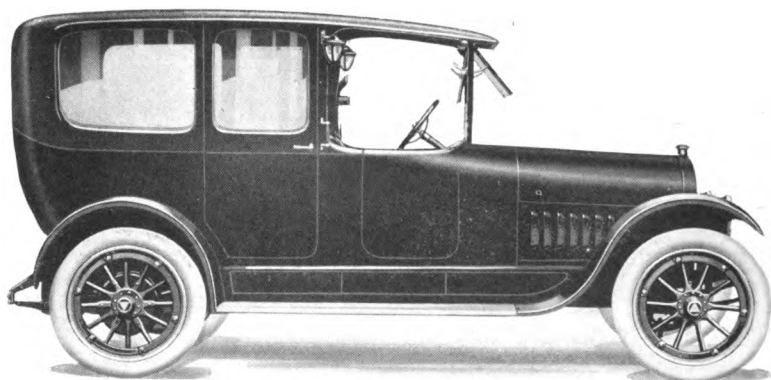

HUDSON SUPER-SIX LIMOUSINE


COLOR	Blue	RADIATOR	Cellular
SEATING CAPACITY . .	Seven persons	COOLING	Water pump
POSITION OF DRIVER .	Left side	IGNITION	Storage battery and generator
WHEELBASE	125½ inches	STARTING SYSTEM . .	Single unit
GAUGE	56 inches	STARTER OPERATED .	Gear to fly wheel
WHEELS	Wood	LIGHTING SYSTEM . .	Electric
FRONT TIRES	35 x 4½ inches	VOLTAGES	Six
REAR TIRES	35 x 4½ inches, anti-skid	WIRING SYSTEM . . .	Single
SERVICE BRAKE . . .	Contracting on rear wheels	GASOLINE SYSTEM . .	Vacuum
EMERGENCY BRAKE . .	Expanding on rear wheels	CLUTCH	Multiple disc in oil
CYLINDERS	Six	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Three forward, one reverse
CAST	En bloc	DRIVE	Spiral bevel
HORSEPOWER	29.4 (N. A. C. C. Rating)	REAR AXLE	Live
BORE AND STROKE . .	3½ x 5 inches	STEERING GEAR . . .	Worm and worm wheel
LUBRICATION	Splash with circulating pump		

In addition to above specifications, price includes windshield, speedometer, ammeter and demountable rims

KLINE MOTOR CAR CORP.

**RICHMOND
VIRGINIA**

Price, \$1095

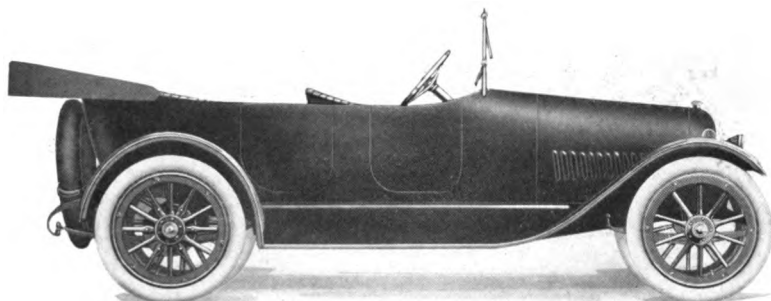

KLINE-KAR TOURING CAR—6-36


COLOR	Body, dark green; running gear, black; wheels, red or green	BORE AND STROKE	3¼ x 4½ inches
SEATING CAPACITY	Five persons	LUBRICATION	Forcefeed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	120 inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	34 x 4 inches	STARTER OPERATED	Gear to fly wheel
REAR TIRES	34 x 4 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Vacuum
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	25.35 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Spiral bevel
		REAR AXLE	Three-quarters floating
		STEERING GEAR	Worm and nut

In addition to above specifications, price includes top, top hood,
windshield, speedometer, ammeter and demountable rims

DORT MOTOR CAR COMPANY

Price, \$650


F L I N T
M I C H I G A N

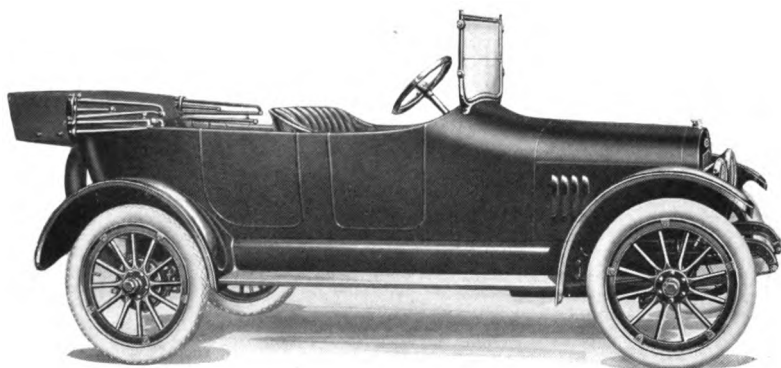

DORT TOURING CAR-5

COLOR	Dark green and black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	105 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	30 x 3½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	30 x 3½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE. . .	Contracting on rear wheels	WIRING SYSTEM. . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM. .	Gravity
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	16.9 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	3¼ x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR . . .	Worm and nut

In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

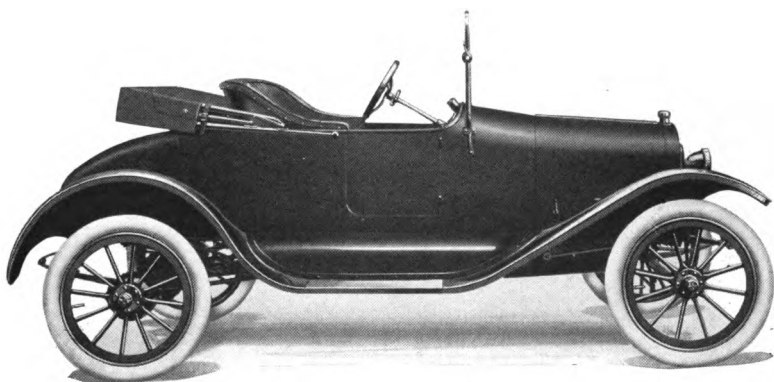


ARGO ROADSTER

COLOR	Body, Brewster green; wheels, black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Two persons	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	96 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Chain to crank shaft
FRONT TIRES	30 x 3 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	30 x 3 inches	VOLTAGES	Twelve
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Contracting on transmission	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Progressive sliding
CAST	En bloc	GEAR CHANGES . . .	Two forward, one reverse
HORSEPOWER	15.63 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	3¼ x 4 inches	REAR AXLE	Semi-floating
		STEERING GEAR . . .	Worm

In addition to above specifications, price includes top, top hood and windshield

**G R A N T
M O T O R
C O M P A N Y**
FINDLAY, OHIO

Price \$795
Three-Passenger Roadster 795
Three-Passenger Cabriolet 1025

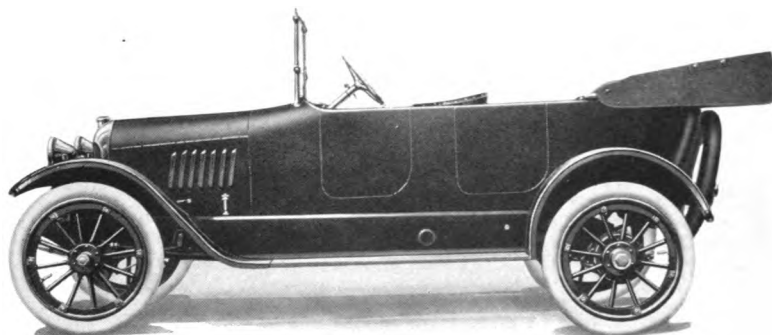


GRANT TOURING CAR—V

COLOR	Body, Brewster green; running gear, black	BORE AND STROKE	3 x 4 1/4 inches
SEATING CAPACITY	Five persons	LUBRICATION	Splash with circulating pump
POSITION OF DRIVER	Left side	RADIATOR	Tubular
WHEELBASE	112 inches	COOLING	Thermo-syphon
GAUGE	56 inches	IGNITION	Storage battery
WHEELS	Wood	STARTING SYSTEM	Single unit
FRONT TIRES	32 x 3 1/2 inches	STARTER OPERATED	Chain to crank shaft
REAR TIRES	32 x 3 1/2 inches, anti-skid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	21.6 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Full floating
		STEERING GEAR	Worm

In addition to above specifications, price includes top, top hood, windshield, speedometer, ammeter, voltmeter, and demountable rims

**BRIGGS -
DETROITER
COMPANY
DETROIT
MICHIGAN**

**Price \$985
Five-Passenger Sedan . 1150**

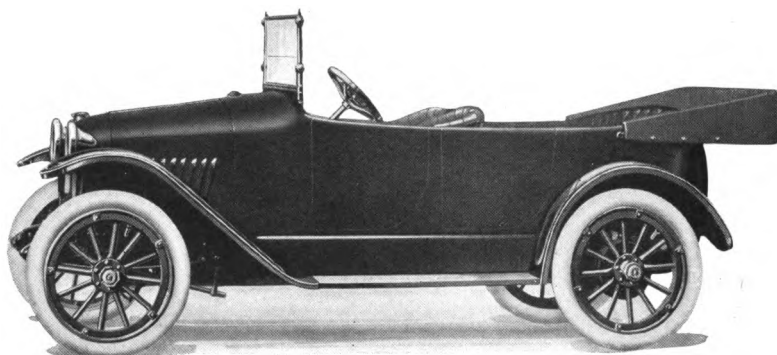

DETROITER TOURING CAR—F

COLOR	Body, Kimball green; running gear, black	LUBRICATION	Splash with circulating pump
SEATING CAPACITY .	Five persons	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Thermo-syphon
WHEELBASE	112 inches	IGNITION	High-tension magneto
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Chain to crankshaft
FRONT TIRES	33 x 4 inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	33 x 4 inches, anti-skid	VOLTAGES	Twelve
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Multiple disc in oil
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	22.5	DRIVE	Spiral bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE .	3¼ x 4¼ inches	STEERING GEAR . . .	Worm and sector


In addition to above specifications, price includes top, top hood, windshield, speedometer and demountable rims

**ILLUSTRATIONS AND
SPECIFICATIONS
ELECTRIC
VEHICLES**

UNIVERSITY MICROFILMS INTERNATIONAL
SERIALS ACQUISITION
300 N ZEEB RD
ANN ARBOR MI 48106-1500
U.S.A.

**ANDERSON
ELECTRIC CAR
COMPANY
DETROIT
MICHIGAN**

Price	\$2175
Three-Passenger Cabriolet . .	2075
Five-Passenger Duplex Drive . .	2275
Five-Passenger Forward Drive .	2250
Five-Passenger Rear Drive . .	2225
Four-Passenger Rear Drive . .	1975

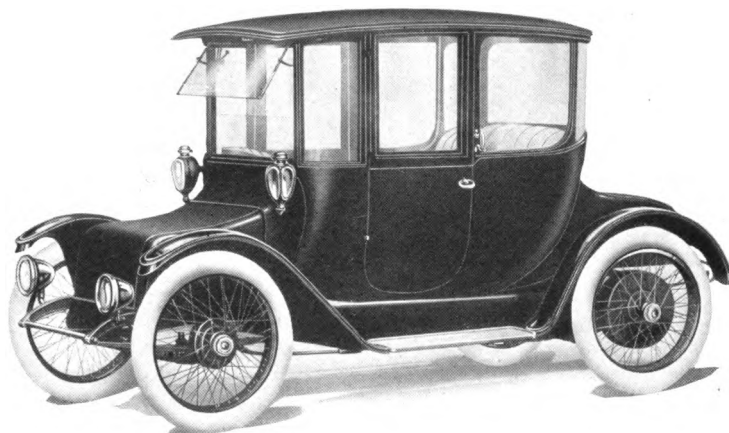


DETROIT ELECTRIC BROUGHAM—57

COLOR	Blue, green or maroon	BRAKE SYSTEMS . . .	Expanding on rear wheels; also magnetic controller brake
SEATING CAPACITY .	Four persons		
BODY:			
LENGTH ALL OVER	142 inches	BATTERY	42 cells, 15 plate
WIDTH ALL OVER .	67 inches		
WHEELBASE	100 inches	SPEED	21 miles per hour
GAUGE	56 inches	NO. FORWARD SPEEDS	Five
WHEELS	Optional	NO. REVERSE SPEEDS	Five
FRONT TIRES	34 x 4 inches, pneumatic	CONTROL	Lever operated
REAR TIRES	36 x 4 1/4 inches, anti-skid cushion	STEERING	Lever

**OHIO ELECTRIC
CAR COMPANY**
TOLEDO, OHIO

Price \$3250
Single-Drive Brougham . . . 2900
Single-Drive Coupe 2400
Roadster 2650

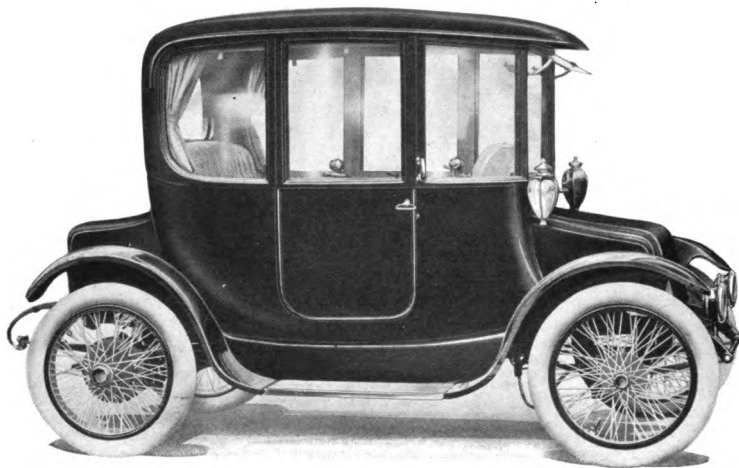

OHIO ELECTRIC BROUGHAM—62

COLOR Coach blue
SEATING CAPACITY . . Five persons

BODY:

LENGTH ALL OVER 147½ inches
WIDTH ALL OVER 65 inches

WHEELBASE 103 inches

GAUGE. 56 inches

WHEELS Optional

FRONT TIRES 34 x 4½ inches,
pneumatic, or
36 x 4½ inches
cushion

REAR TIRES 34 x 4½ inches,
pneumatic, or
36 x 4½ inches,
cushion

BRAKE SYSTEMS . . . Double contracting
on rear wheels with
magnetic brake
on motor

BATTERY 40 cells, 13 plate

SPEED Twenty-eight
miles per hour

NO. FORWARD SPEEDS Five

NO. REVERSE SPEEDS Three

CONTROL Magnetic

STEERING Lever

**WOODS MOTOR
VEHICLE
COMPANY**
CHICAGO
ILLINOIS

Price, \$2850




WOODS ELECTRIC—16-1522

COLOR	Optional	BRAKE SYSTEMS . . .	Contracting on armature shaft and expanding on rear wheels
SEATING CAPACITY .	Four persons		
BODY:			
LENGTH ALL OVER	119¾ inches	BATTERY	42 cells, 13 plate
WIDTH ALL OVER .	60¾ inches	SPEED	25 miles per hour
WHEELBASE	100 inches	NO. FORWARD SPEEDS	Five
GAUGE	56 inches	NO. REVERSE SPEEDS	Five
WHEELS	Wood	CONTROL	Lever operator
FRONT TIRES	34 x 4 inches, cushion or pneumatic	STEERING	Lever
REAR TIRES	38 x 4½ inches, cushion or pneumatic		

**THE BAKER
R. & L. CO.**
CLEVELAND, OHIO

Price. \$3000

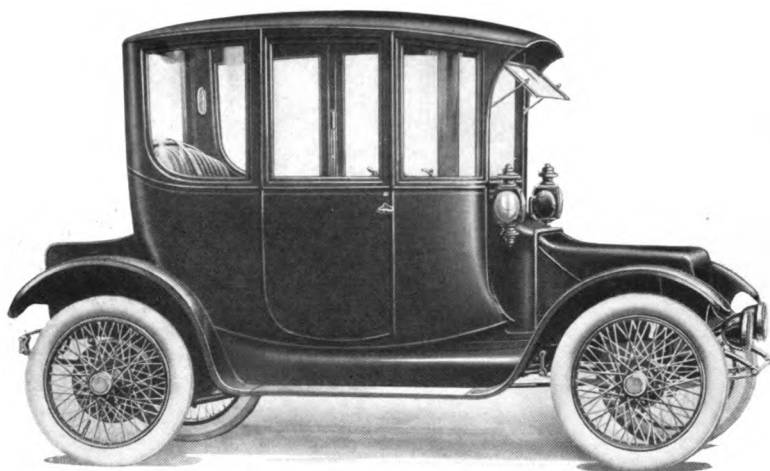


RAUCH & LANG COACH—J-6

COLOR	Optional	REAR TIRES	33 x 4½ inches; or 36 x 4½ inches, cushion
SEATING CAPACITY	Five persons	BRAKE SYSTEMS	Contracting on motor and ex- panding on rear wheels; also elec- tric brake
BODY:		BATTERY	42 cells, 11 plate
LENGTH ALL OVER	144 inches	SPEED	26 miles per hour
WIDTH ALL OVER	64 inches	NO. FORWARD SPEEDS	Six
WHEELBASE	100 inches	NO. REVERSE SPEEDS	Three
GAUGE	56 inches	CONTROL	Dual lever
WHEELS	Optional	STEERING	Lever
FRONT TIRES	34 x 4½ inches; or 36 x 4½ inches, cushion		

**THE BAKER
R. & L. CO.
CLEVELAND, OHIO**

Price, \$2475

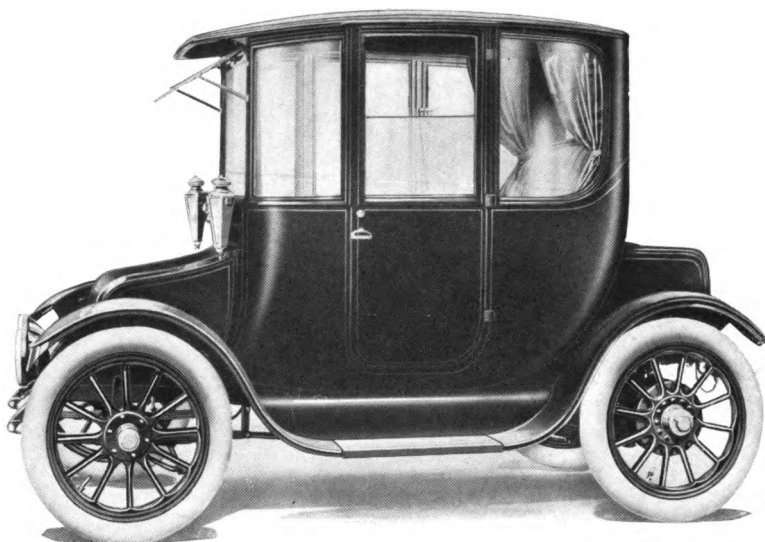


BAKER COUPE D. A.—6

COLOR	Optional	REAR TIRES	34 x 4 inches, cushion
SEATING CAPACITY . .	Four persons	BRAKE SYSTEMS . . .	Internal expanding on rear wheels
BODY:		BATTERY	36 cells, 11 plate
LENGTH ALL OVER	126 inches	SPEED	23 miles per hour
WIDTH ALL OVER .	66½ inches	NO. FORWARD SPEEDS	Seven
WHEELBASE	90 inches	NO. REVERSE SPEEDS	Three
GAUGE	56 inches	CONTROL	Lever operated
WHEELS	Optional	STEERING	Optional
FRONT TIRES	32 x 4 inches, pneumatic		

**THE WAVERLEY
C O M P A N Y**
INDIANAPOLIS
I N D I A N A

Price \$2150
Four-Chair Brougham . . . 2200

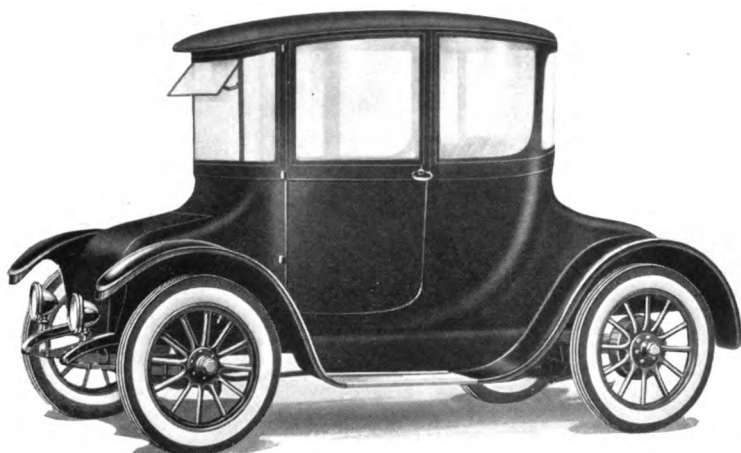


WAVERLEY ELECTRIC—110

COLOR	Black	REAR TIRES	32 x 4 inches, pneumatic or cushion
SEATING CAPACITY . .	Four persons	BRAKE SYSTEMS . . .	Hub brakes
BODY:		BATTERY	42 cells, 11 plate
LENGTH ALL OVER	124 inches	SPEED	20 miles per hour
WIDTH ALL OVER .	56 inches	NO. FORWARD SPEEDS	Four
WHEELBASE	95 inches	NO. REVERSE SPEEDS	Two
GAUGE	56 inches	CONTROL	Lever operated
WHEELS	Wood	STEERING	Lever
FRONT TIRES	32 x 4 inches, pneumatic or cushion		

**GENERAL
VEHICLE
COMPANY, INC.**

**LONG ISLAND CITY
NEW YORK**

Price, Chassis, \$2600

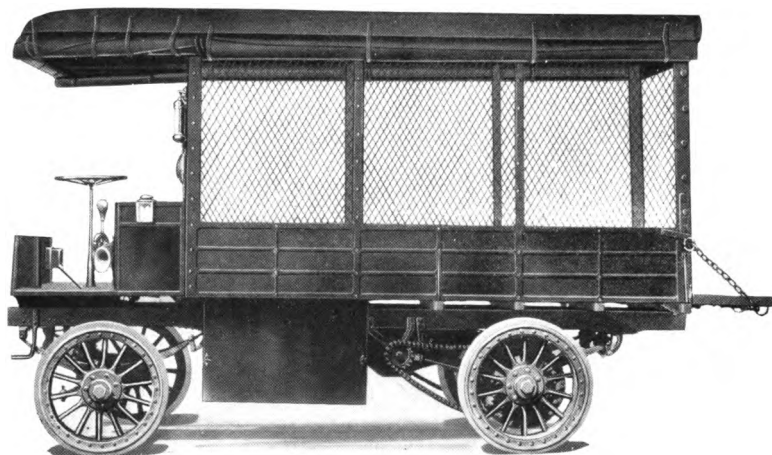


G. V. ELECTRIC TWO-TON TRUCK

COLOR	Lead	BRAKE SYSTEMS . .	Expanding on rear wheels and contracting on countershaft
CARRYING CAPACITY .	4000 pounds	BATTERY	44 cells, 17 plate
BODY:		SPEED	9 miles per hour
LENGTH ALL OVER	120 inches	NO. FORWARD SPEEDS	Five
WIDTH ALL OVER .	56 inches	NO. REVERSE SPEEDS	Two
WHEELBASE	111 inches	CONTROL	Lever operated
GAUGE	61 inches	STEERING	Wheel
WHEELS	Wood		
FRONT TIRES	36 x 4 inches, single solid		
REAR TIRES	36 x 3 inches, dual solid		

**MILBURN
WAGON
COMPANY**
TOLEDO, OHIO

Price . . . \$1485
Roadster . . 1285

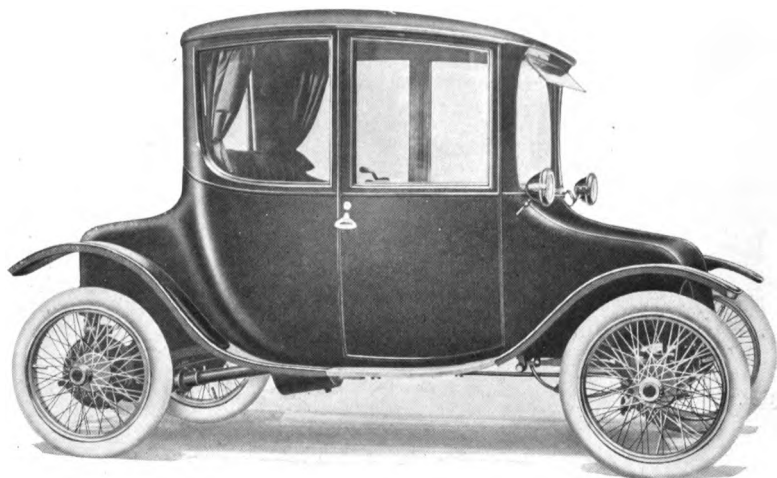


MILBURN LIGHT ELECTRIC COUPE—15

COLOR	Blue	BRAKE SYSTEMS . .	Contracting and expanding on rear wheels
SEATING CAPACITY .	Four persons	BATTERY	22 cells, 15 plate
WHEELBASE	100 inches	SPEED	20 miles per hour
GAUGE	50 inches	NO. FORWARD SPEEDS	Four
WHEELS	Wood	NO. REVERSE SPEEDS	Two
FRONT TIRES	30 x 3½ inches, pneumatic	CONTROL	Lever
REAR TIRES	30 x 3½ inches, pneumatic	STEERING	Lever

**SAGINAW
MICHIGAN**

Price, Chassis, \$1200

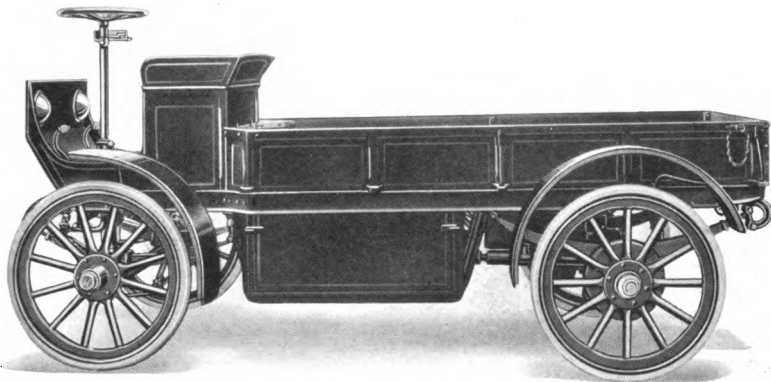**AMERICAN-ARGO—K-10**

COLOR Optional

CARRYING CAPACITY. 1000 pounds

BODY:

LENGTH ALL OVER 129½ inches

WIDTH ALL OVER . 68 inches

WHEELBASE 86 inches

GAUGE 54 inches

TIRE DIMENSIONS:

FRONT 34 x 3 inches
(cushion or solid)

REAR 34 x 3 inches
(cushion or solid)

BRAKE SYSTEMS . . Double expanding on rear wheels

BATTERY. 40 cells, 11 plate

SPEED 16 miles per hour

NO. FORWARD SPEEDS **Four**

NO. REVERSE SPEEDS Two

CONTROL Lever operated

STEERING Wheel


**BORLAND -
GRANNIS
COMPANY**

**SAGINAW
MICHIGAN**

Price \$2550

Roadster . . . 2250

Limousine . . . 5500

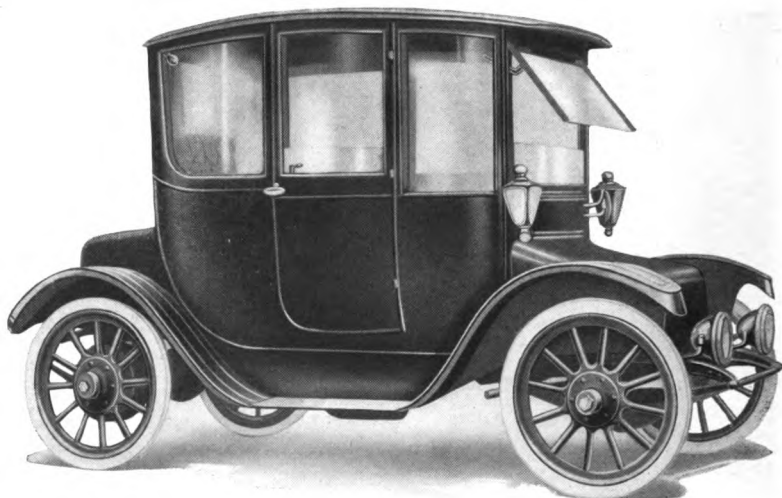

AMERICAN-BORLAND—50

COLOR Optional

SEATING CAPACITY . . Four persons

BODY:

LENGTH ALL OVER 120¾ inches

WIDTH ALL OVER . 67½ inches

WHEELBASE 96 inches

GAUGE 56 inches

TIRE DIMENSIONS:

**FRONT 34 x 4 inches
(pneumatic or
cushion)**

**REAR 34 x 4 inches
(pneumatic or
cushion)**

**BRAKE SYSTEMS . . . Internal expand-
ing on rear wheels**

BATTERY 40 cells, 11 plate

SPEED 22 miles per hour

NO. FORWARD SPEEDS Six


NO. REVERSE SPEEDS Three

CONTROL Lever operated

STEERING Lever

**AMERICAN
ELECTRIC CAR
COMPANY**
INCORPORATED IN MICHIGAN
**SAGINAW
MICHIGAN**

Price \$3200
Model 33 Rear-Drive Brougham . 3100
Model 34 Rear-Drive Brougham . 3150

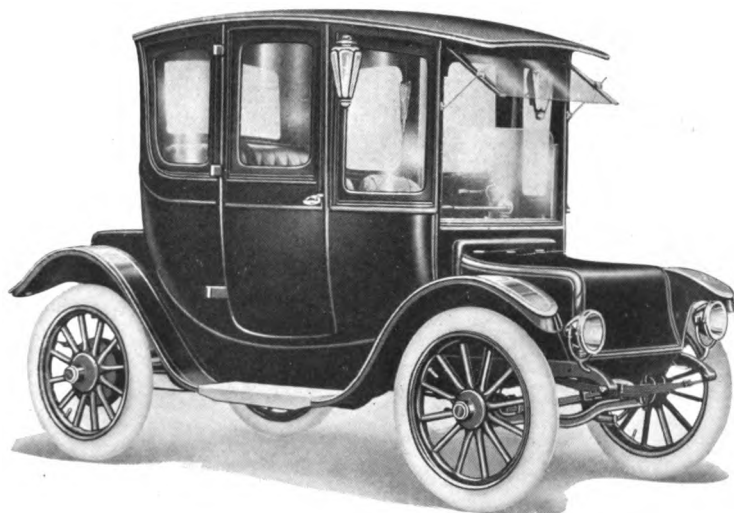

AMERICAN-BROC DOUBLE-DRIVE BROUGHAM—36

COLOR Optional
SEATING CAPACITY . Five persons

BODY:

LENGTH ALL OVER 123 inches
WIDTH ALL OVER . 68 inches

WHEELBASE 96 inches
GAUGE 50 inches

TIRE DIMENSIONS:

FRONT 34 x 4 inches
(pneumatic), or
36 x 4 inches
(cushion)
REAR 34 x 4 inches
(pneumatic), or
36 x 4 inches
(cushion)

BRAKE SYSTEMS . . Contracting on
drive shaft and
expanding on
rear wheels

BATTERY 40 cells, 11 plate

SPEED 24 miles per hour

NO. FORWARD SPEEDS Five


NO. REVERSE SPEEDS Five

CONTROL Lever operated

STEERING Lever

**ILLUSTRATIONS AND
SPECIFICATIONS
GASOLINE
COMMERCIAL
VEHICLES**

213
165
~~48 pages~~

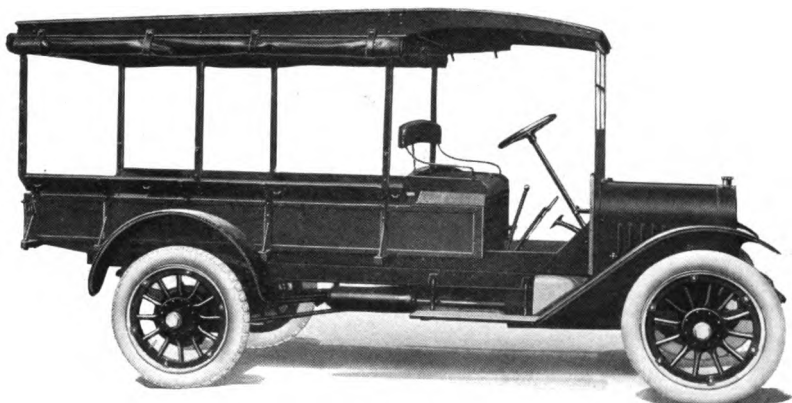


G. M. C. 1500-POUND TRUCK—15

COLOR	G. M. C. gray, Brewster green, or dark red	HORSEPOWER	19.6 (N. A. C. C. Rating)
CARRYING CAPACITY .	1500 pounds	BORE AND STROKE . .	3½ x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Force feed and splash
WHEELBASE	122 inches	RADIATOR	Tubular
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	35 x 5 inches, pneumatic	GASOLINE SYSTEM . .	Gravity
REAR TIRES	35 x 5 inches, pneumatic	CLUTCH	Cone
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION . . .	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Three forward, one reverse
CYLINDERS	Four	DRIVE	Plain bevel
ARRANGED	Vertically	REAR AXLE	Three-quarters floating
CAST	En bloc	STEERING GEAR . . .	Screw and nut


In addition to above specifications,
price includes body and canopy top

**GENERAL
VEHICLE
COMPANY, INC.**
LONG ISLAND CITY
NEW YORK

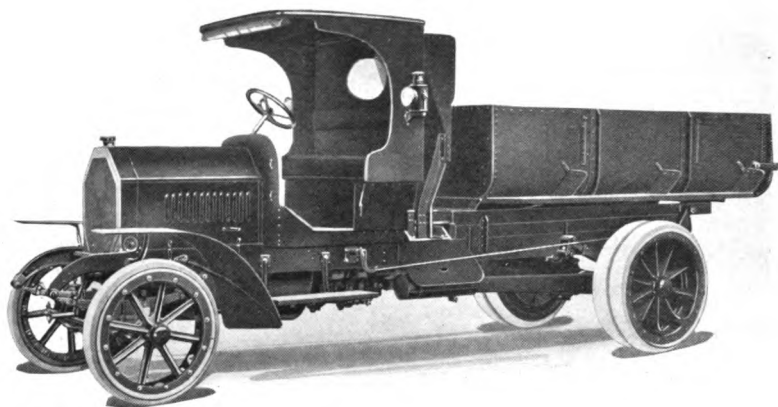

G. V. MERCEDES FIVE- TO SIX-TON TRUCK—FV

COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	Six tons	HORSEPOWER	28.9 (N. A. C. C. Rating)
POSITION OF DRIVER	Right side	BORE AND STROKE	4¼ x 5⅝ ₁₀ inches
WHEELBASE	169 inches	LUBRICATION	Force feed
GAUGE	61 inches	RADIATOR	Cellular
WHEELS	Cast steel	COOLING	Water pump
FRONT TIRES	34 x 5 inches, single solid	IGNITION	High-tension magneto
REAR TIRES	40 x 6 inches, dual solid	GASOLINE SYSTEM	Pressure
SERVICE BRAKE	Contracting on transmission	CLUTCH	Cone
EMERGENCY BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Four forward, one reverse
ARRANGED	Vertically	DRIVE	Internal gear
		REAR AXLE	Dead
		STEERING GEAR	Screw and nut

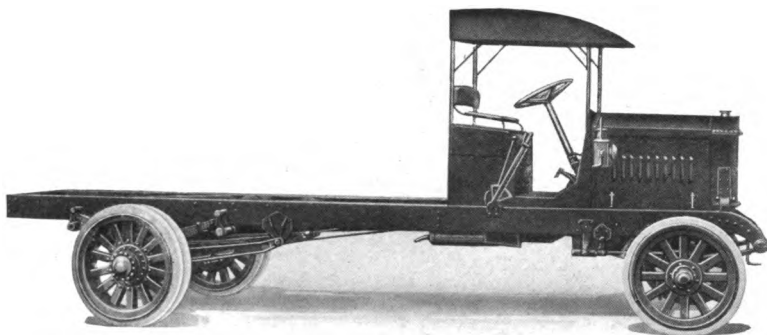


VELIE THREE-AND-ONE-HALF-TON TRUCK—26

COLOR	Optional	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY.	7000 pounds	BORE AND STROKE . . .	4½ x 5½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Force feed and splash
WHEELBASE	172 inches	RADIATOR	Tubular
GAUGE	Front, 58 inches; rear, 66 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High tension
FRONT TIRES	36 x 5 inches solid	GASOLINE SYSTEM . . .	Vacuum
REAR TIRES	40 x 5 inches dual solid	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	External on rear axle	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Internal on rear axle	GEAR CHANGES . . .	Four forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	In pairs	STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, seat, prestolite tank and lamps

**STERLING
MOTOR TRUCK
COMPANY**
INCORPORATED IN THE STATE OF WISCONSIN
**WEST ALLIS
WISCONSIN**

Price	\$895
Flare Board Express, with Top	1005
Flare Board Express, with Storm Curtains	1020
Full Panel Body	1030

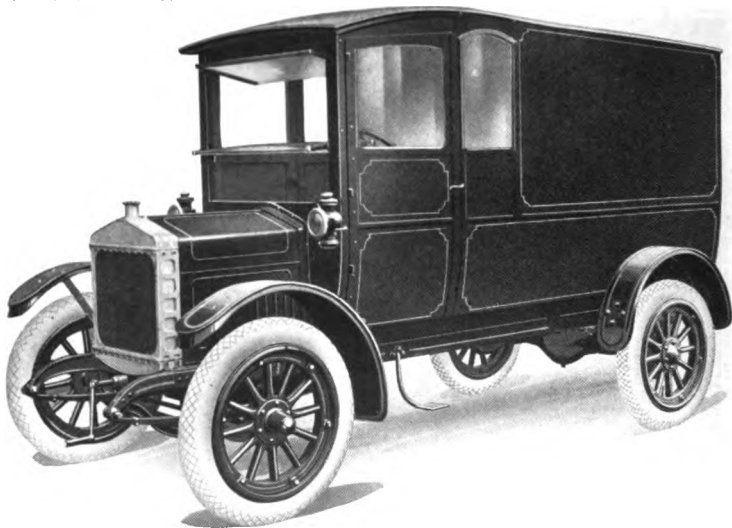

STERLING 1500-POUND TRUCK


COLOR	Optional	HORSEPOWER	15.63 (N. A. C. C. Rating)
CARRYING CAPACITY	1500 pounds	BORE AND STROKE	3½ x 4½ inches
POSITION OF DRIVER	Behind motor	LUBRICATION	Pump over and splash
WHEELBASE	127 inches	RADIATOR	Tubular
GAUGE	56 inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	High tension magneto and storage battery
FRONT TIRES	34 x 4 inches, pneumatic	GASOLINE SYSTEM	Gravity
REAR TIRES	34 x 4 inches, anti-skid, pneu- matic	CLUTCH	Dry multiple disc
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Semi-floating
CAST	En bloc	STEERING GEAR	Worm and nut

In addition to above specifications, price includes windshield and hubometer

**PIERCE-ARROW
MOTOR CAR
COMPANY**

**B U F F A L O
N E W Y O R K**

Price, Chassis . . \$3000

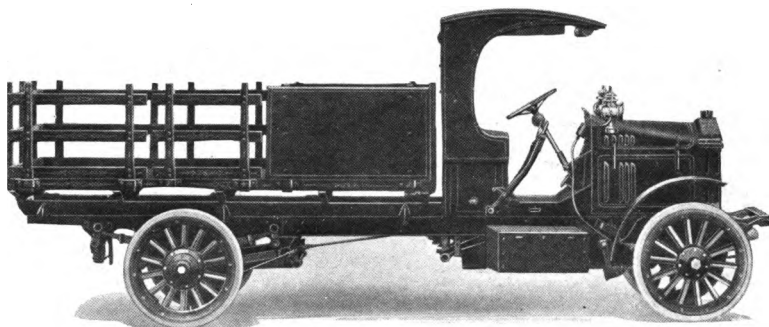


PIERCE-ARROW TWO-TON TRUCK—X-2

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY.	Two tons	HORSEPOWER	25.6
POSITION OF DRIVER.	Right side	(N. A. C. C. Rating)	
WHEELBASE	150 or 180 inches	BORE AND STROKE	4 x 5½ inches
GAUGE	56 inches	LUBRICATION	Force feed
WHEELS	Wood	RADIATOR	Tubular
FRONT TIRES	36 x 4 inches, single solid	COOLING	Water
REAR TIRES	36 x 4 inches, dual solid	IGNITION	High tension magneto
SERVICE BRAKE	Contracting on transmission	GASOLINE SYSTEM.	Gravity
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
		DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR	Screw and nut

**PIERCE-ARROW
MOTOR CAR
COMPANY**

**B U F F A L O
N E W Y O R K**

Price, Chassis . . \$4500

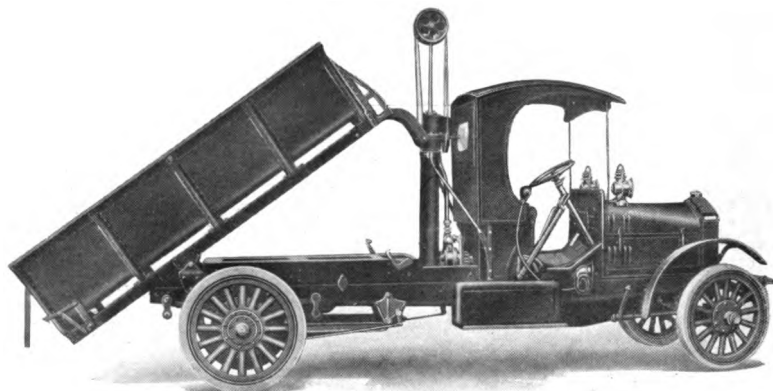


PIERCE-ARROW FIVE-TON TRUCK—R-5

COLOR	Optional	HORSEPOWER	38.03 (N. A. C. C. Rating)
CARRYING CAPACITY	Five tons	BORE AND STROKE	4 $\frac{1}{4}$ x 6 inches
POSITION OF DRIVER	Right side	LUBRICATION	Force feed
WHEELBASE	168 or 204 inches	RADIATOR	Tubular
GAUGE	64 inches	COOLING	Water
WHEELS	Wood	IGNITION	High tension magneto and dry batteries
FRONT TIRES	36 x 5 inches, single solid	GASOLINE SYSTEM	Gravity
REAR TIRES	40 x 6 inches, dual solid	CLUTCH	Cone
SERVICE BRAKE	Contracting on transmission	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	In pairs	STEERING GEAR	Screw and nut

**THE AUTOCAR
COMPANY**
ARDMORE
PENNSYLVANIA

Price, Chassis \$1650
With Coal or Contractor Body
with Power Hoist Attach-
ment 2150
With Open Body. 1800
With Express Body 1875

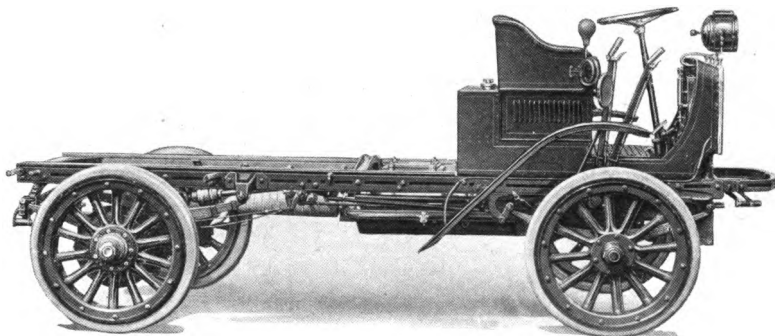


AUTOCAR TWO-TON TRUCK—XXI-F

COLOR	Optional	CAST	Separately
CARRYING CAPACITY.	4000 pounds	HORSEPOWER	18 (N. A. C. C. Rating)
POSITION OF DRIVER.	Right side over motor	BORE AND STROKE.	4 $\frac{3}{4}$ x 4 $\frac{1}{2}$ inches
WHEELBASE.	97 inches	LUBRICATION	Full splash
GAUGE	58 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Water
FRONT TIRES	34 x 4 inches, solid, or 36 x 5 inches, pneumatic	IGNITION	High-tension magneto
REAR TIRES	34 x 5 inches, solid, or 36 x 5 inches, pneumatic	GASOLINE SYSTEM.	Gravity
SERVICE BRAKE.	Contracting on rear wheels	CLUTCH	Three plate
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Progressive slid- ing
CYLINDERS	Two	GEAR CHANGES	Three forward, one reverse
ARRANGED	Horizontally	DRIVE	Shaft
		REAR AXLE	Full floating
		STEERING GEAR.	Bevel pinion and sector

**FEDERAL
MOTOR TRUCK
COMPANY**
DETROIT, MICHIGAN
**DETROIT
MICHIGAN**

Price, Chassis . . \$1800

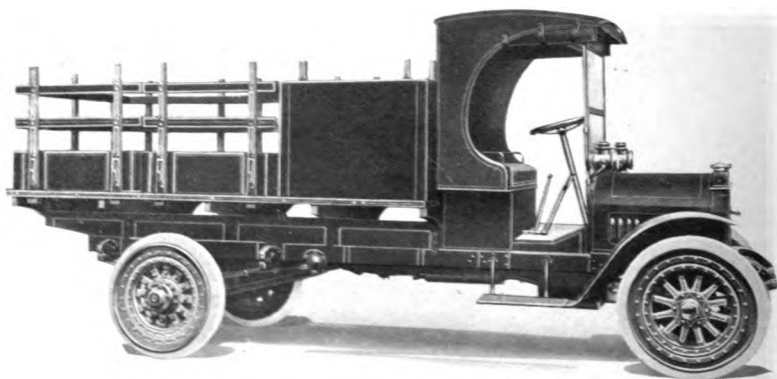


FEDERAL ONE-AND-ONE-HALF-TON TRUCK

COLOR	Lead	HORSEPOWER	27.23 (N. A. C. C. Rating)
CARRYING CAPACITY	3000 pounds	BORE AND STROKE	4½ x 5¼ inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	120 or 144 inches	RADIATOR	Cellular
GAUGE	Front, 56 inches; rear, 58½ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 3½ inches	GASOLINE SYSTEM	Gravity
REAR TIRES	36 x 5 inches	CLUTCH	Cone
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Worm and wheel

**FEDERAL
MOTOR TRUCK
COMPANY
DETROIT
MICHIGAN**

Price, Chassis . . \$2800

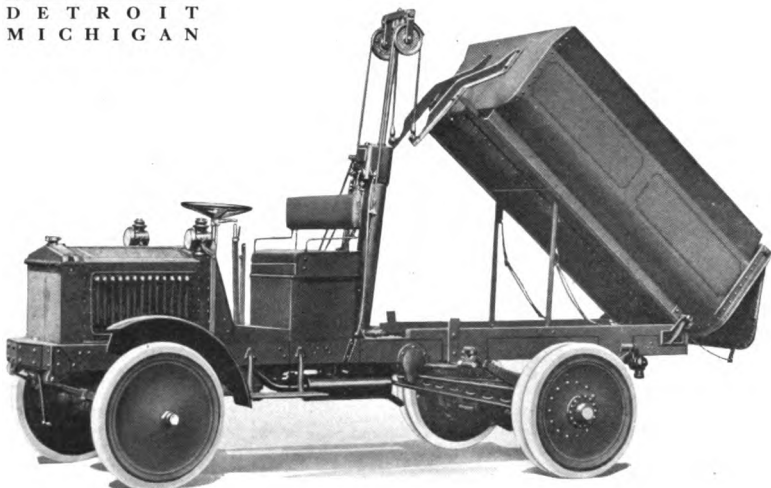


FEDERAL THREE-AND-ONE-HALF-TON TRUCK—L

COLOR	Lead	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY.	7000 pounds	BORE AND STROKE	4½ x 5½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Splash with circulating pump
WHEELBASE	146 inches	RADIATOR	Cellular
GAUGE	Front, 66½ inches; rear, 67¾ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 5 inches, single solid	GASOLINE SYSTEM	Gravity
REAR TIRES	36 x 5 inches, dual solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	In pairs	STEERING GEAR	Worm and wheel

**LOCOMOBILE
COMPANY
OF AMERICA**
**BRIDGEPORT
CONNECTICUT**

Price, Chassis, \$3500

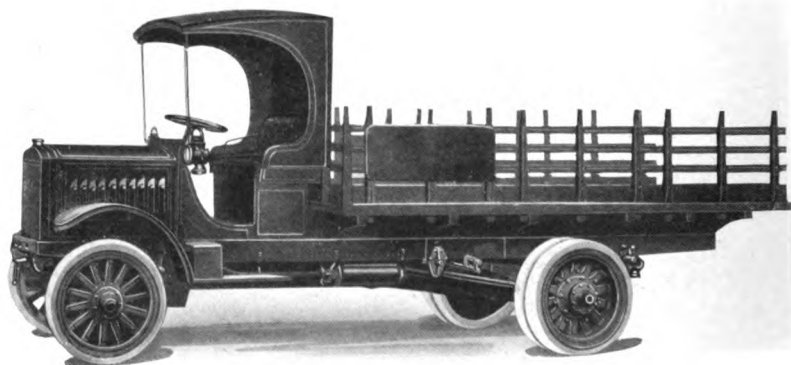

LOCOMOBILE THREE-TON TRUCK—B


COLOR	Optional	BORE AND STROKE	4 1/4 x 6 inches
CARRYING CAPACITY	6000 pounds	LUBRICATION	Pressure and internal circulating system
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	150 or 170 inches	COOLING	Water pump
GAUGE	Front, 60 inches; rear, 66 inches	IGNITION	High-tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	36 x 5 inches, single solid	STARTER OPERATED	Gear to fly wheel
REAR TIRES	36 x 5 inches, dual solid	LIGHTING SYSTEM	Oil
SERVICE BRAKE	Contracting on propeller shaft	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	28.9 (N. A. C. C. Rating)	GEAR CHANGES	Four forward
		DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

Price includes driver's seat and cushion, and lamps

**LOCOMOBILE
COMPANY
OF AMERICA**

**BRIDGEPORT
CONNECTICUT**

Price, Chassis . . \$3650

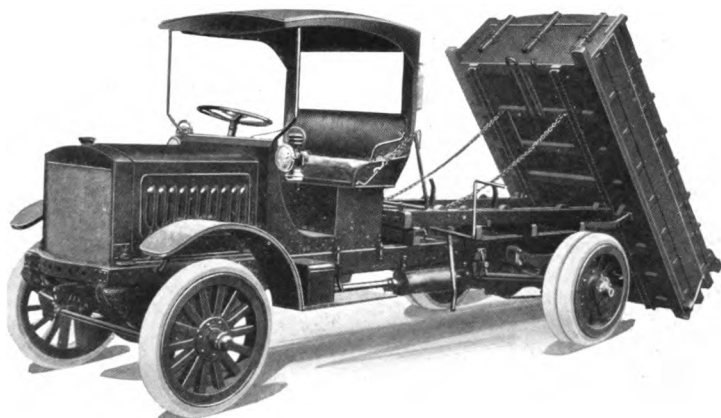


LOCOMOBILE FOUR-TON TRUCK—BB

COLOR Optional
CARRYING CAPACITY . 8000 pounds
POSITION OF DRIVER . Right side
WHEELBASE 150 or 170 inches
GAUGE Front, 60 inches;
rear, 66 inches
WHEELS Wood
FRONT TIRES 36 x 5 inches,
single solid
REAR TIRES 36 x 6 inches,
dual solid
SERVICE BRAKE . . Contracting on
propeller shaft
EMERGENCY BRAKE . Expanding on
rear wheels
CYLINDERS Four
ARRANGED In pairs
CAST Vertically
HORSEPOWER 28.9
(N. A. C. C. Rating)
BORE AND STROKE . 4¼ x 6 inches

LUBRICATION Pressure and
internal cir-
culating system
RADIATOR Cellular
COOLING Water pump
IGNITION High-tension
magneto and
storage battery
STARTING SYSTEM . . Two unit
STARTER OPERATED . Gear to fly wheel
LIGHTING SYSTEM . . Oil
VOLTAGES Six
WIRING SYSTEM . . . Single
GASOLINE SYSTEM . . Gravity
CLUTCH Cone
TRANSMISSION Selective sliding
GEAR CHANGES . . . Four forward
DRIVE Worm
REAR AXLE Full floating
STEERING GEAR . . . Worm and gear

Price includes driver's seat and cushion, and lamps

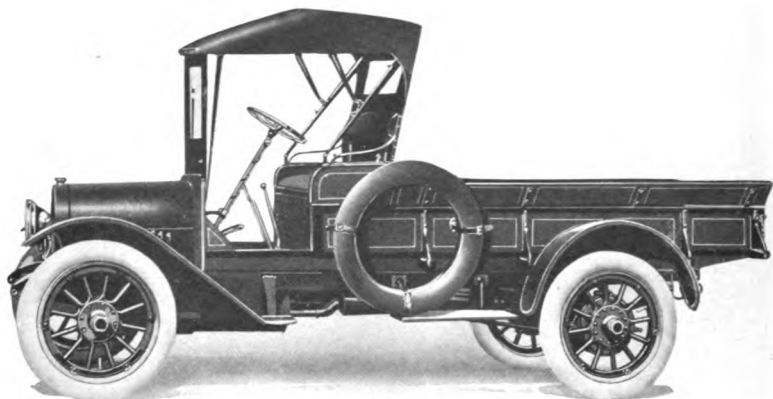

BUICK ONE-TON TRUCK—D-4


COLOR	Body red, running gear black	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY.	2000 pounds	RADIATOR	Cellular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	122 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Single unit
WHEELS	Wood	STARTER OPERATED .	Gear to fly wheel
FRONT TIRES	35 x 5 inches, pneumatic	LIGHTING SYSTEM . .	Electric
REAR TIRES	35 x 5 inches, pneumatic	VOLTAGES	Six
SERVICE BRAKE . .	Contracting on rear wheels	WIRING SYSTEM . . .	Single
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Vacuum
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION . . .	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	22.5 (N. A. C. C. Rating)	DRIVE	Bevel
BORE AND STROKE .	3 $\frac{3}{4}$ x 5 inches	REAR AXLE	Three-quarters floating
		STEERING GEAR. . . .	Split nut and worm

In addition to above specifications, price includes top, windshield, speedometer, ammeter and demountable rims

W A L T E R MOTOR TRUCK C O M P A N Y

49-51 WEST 66th ST.
NEW YORK, N. Y.

Price, Chassis \$4750
Six-Ton 5000
Seven and One-half Ton . 5250

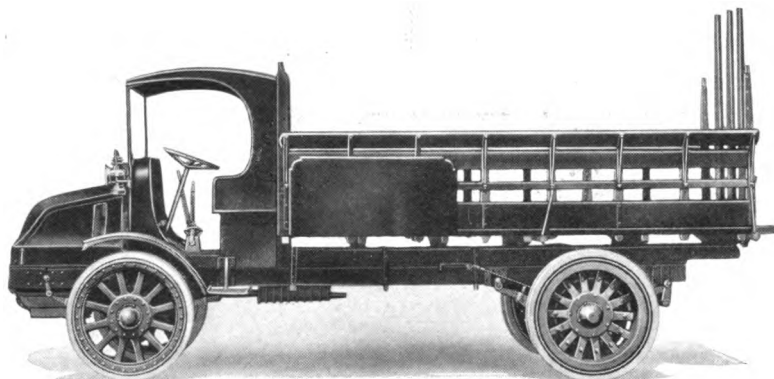

WALTER FOUR WHEEL DRIVE FIVE-TON TRUCK


COLOR	Lead	CAST	En bloc
CARRYING CAPACITY .	Five tons	HORSEPOWER	30.63
POSITION OF DRIVER	Left side	(N. A. C. C. Rating)	
WHEELBASE	96 to 168 inches	BORE AND STROKE .	4 3/4 x 6 inches
GAUGE	Front, 66 inches; rear, 66 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Tubular
FRONT TIRES	40 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 5 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE . . .	Contracting on transmission shaft	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE .	Contracting on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically, under hood	GEAR CHANGES . . .	Four and reverse
		DRIVE	Spur gear to wheels
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes cab

**SAURER
MOTOR
COMPANY**

**WEST END AVE. &
64th STREET
NEW YORK, N. Y.**

Price, Chassis . . \$4800

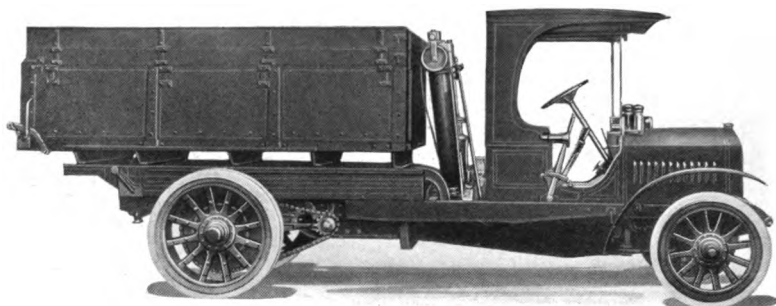


SAURER FIVE-TON TRUCK

COLOR	Lead	BORE AND STROKE	4½ x 5½ inches
CARRYING CAPACITY	10,000 pounds	LUBRICATION	Pump over and splash and gravity
POSITION OF DRIVER	Right side	RADIATOR	Honeycomb
WHEELBASE	153½ inches	COOLING	Water pump
GAUGE	66¼ inches	IGNITION	High-tension magneto
WHEELS	Wood	GASOLINE SYSTEM	Gravity
FRONT TIRES	36 x 5 inches, single solid	CLUTCH	Cone
REAR TIRES	42 x 5 inches, dual solid	TRANSMISSION	Selective sliding
SERVICE BRAKE	On differential	GEAR CHANGES	Four forward, one reverse
EMERGENCY BRAKE	Expanding on rear wheels	DRIVE	Chain
CYLINDERS	Four	REAR AXLE	Dead
ARRANGED	Vertically, under hood	STEERING GEAR	Worm and sector
CAST	In pairs		
HORSEPOWER	30.63 (N. A. C. C. Rating)		

**MACK BROTHERS
MOTOR CAR
COMPANY**

**64th STREET AND
WEST END AVE.,
NEW YORK, N. Y.**

Price, Chassis . . \$2700

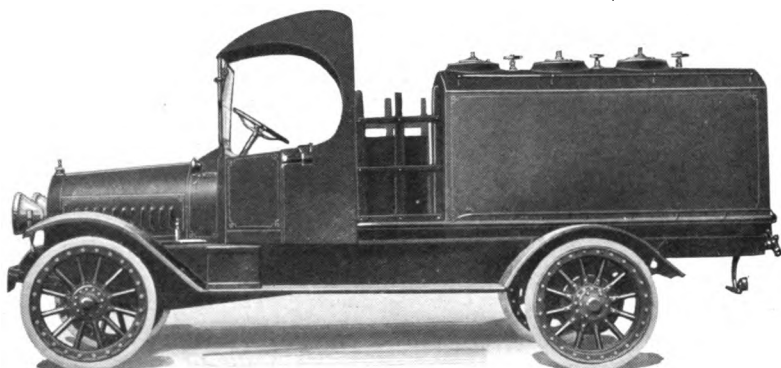


MACK TWO-TON TRUCK—AB

COLOR	Lead	HORSEPOWER	25.6 (N. A. C. C. Rating)
CARRYING CAPACITY	4000 pounds	BORE AND STROKE	4 x 5 inches
POSITION OF DRIVER	Back of motor	LUBRICATION	Pump over and splash and gravity
WHEELBASE	144 or 162 inches	RADIATOR	Honeycomb
GAUGE	58½ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 4 inches, single solid	GASOLINE SYSTEM	Gravity
REAR TIRES	36 x 4 inches, dual solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	In pairs	STEERING GEAR	Worm and sector

**K E L L Y -
S P R I N G F I E L D
M O T O R T R U C K
C O M P A N Y
S P R I N G F I E L D
O H I O**

Price. \$2000

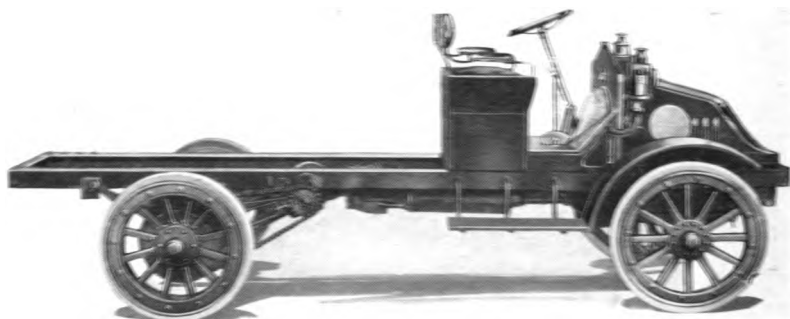


KELLY-SPRINGFIELD ONE-AND-ONE-HALF-TON TRUCK—K-30

COLOR	Optional	CAST	En bloc
CARRYING CAPACITY	3000 pounds	HORSEPOWER	22.5
POSITION OF DRIVER	Back of motor	(N. A. C. C. Rating)	
WHEELBASE	120, 144, 168 and 180 inches	BORE AND STROKE	3 $\frac{1}{4}$ x 5 $\frac{1}{4}$ inches
GAUGE	Front, 56 inches; rear, 60 inches	LUBRICATION	Force feed
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 3 $\frac{1}{2}$ inches, single solid	COOLING	Water pump
REAR TIRES	36 x 5 inches, single solid	IGNITION	High-tension magneto
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Gravity
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
		DRIVE	Side chain
		REAR AXLE	Dead
		SUFFERING GEAR	Worm and gear

**K E L L Y -
SPRINGFIELD
MOTOR TRUCK
C O M P A N Y
SPRINGFIELD
O H I O**

Price, \$3400

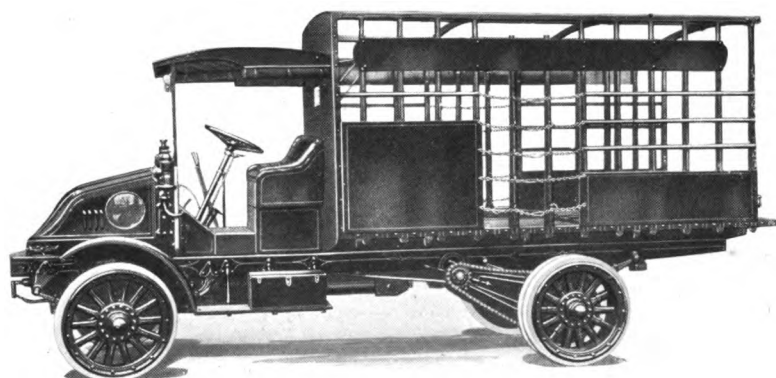


KELLY-SPRINGFIELD THREE-AND-ONE-HALF-TON TRUCK—K-40

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY	7000 pounds	HORSEPOWER	32.4 (N. A. C. C. Rating)
POSITION OF DRIVER	Back of motor	BORE AND STROKE	4½ x 6½ inches
WHEELBASE	150, 172, 194 or 208 inches	LUBRICATION	Force feed
GAUGE	Front, 68 inches; rear, 73 inches	RADIATOR	Cellular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 5 inches, single solid	IGNITION	High-tension magneto
REAR TIRES	40 x 5 inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on rear wheels	CLUTCH	Cone
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

**K E L L Y -
SPRINGFIELD
MOTOR TRUCK
C O M P A N Y
SPRINGFIELD
O H I O**

Price. \$2000

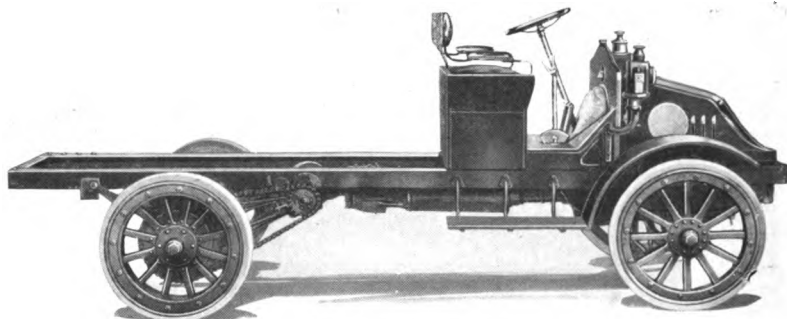


KELLY-SPRINGFIELD ONE-AND-ONE-HALF-TON TRUCK—K-30

COLOR	Optional	CAST	En bloc
CARRYING CAPACITY .	3000 pounds	HORSEPOWER	22.5
POSITION OF DRIVER	Back of motor		(N. A. C. C. Rating)
WHEELBASE	120, 144, 168 and 180 inches	BORE AND STROKE . .	3¾ x 5¼ inches
		LUBRICATION	Force feed
GAUGE	Front, 56 inches; rear, 60 inches	RADIATOR	Cellular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 3½ inches, single solid	IGNITION	High-tension magneto
REAR TIRES	36 x 5 inches, single solid	GASOLINE SYSTEM . .	Gravity
SERVICE BRAKE . . .	Contracting on rear wheels	CLUTCH	Cone
EMERGENCY BRAKE .	Expanding on rear wheels	TRANSMISSION . . .	Selective sliding
CYLINDERS	Four	GEAR CHANGES . . .	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR . . .	Worm and gear

**K E L L Y -
SPRINGFIELD
MOTOR TRUCK
C O M P A N Y
SPRINGFIELD
O H I O**

Price, \$3400

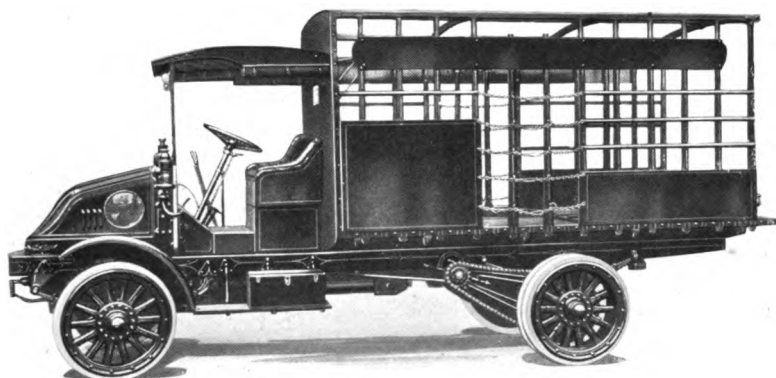


KELLY-SPRINGFIELD THREE-AND-ONE-HALF-TON TRUCK—K-40

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY	7000 pounds	HORSEPOWER	32.4 (N. A. C. C. Rating)
POSITION OF DRIVER	Back of motor	BORE AND STROKE	4½ x 6½ inches
WHEELBASE	150, 172, 194 or 208 inches	LUBRICATION	Force feed
GAUGE	Front, 68 inches; rear, 73 inches	RADIATOR	Cellular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 5 inches, single solid	IGNITION	High-tension magneto
REAR TIRES	40 x 5 inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on rear wheels	CLUTCH	Cone
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

**K E L L Y -
SPRINGFIELD
MOTOR TRUCK
C O M P A N Y**
**SPRINGFIELD
O H I O**

Price, \$4250

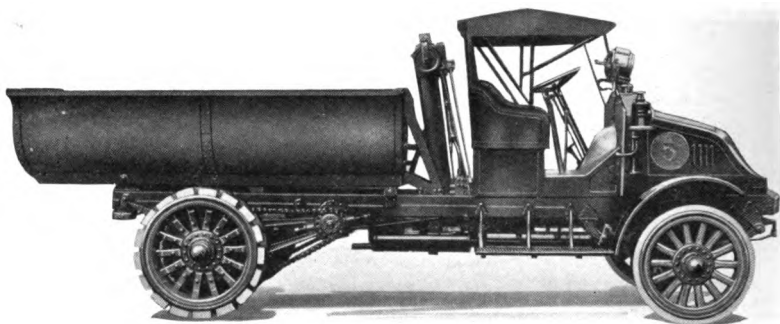


KELLY-SPRINGFIELD FIVE-TON TRUCK—K-50

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY	10,000 pounds	HORSEPOWER	32.4
POSITION OF DRIVER	Back of motor	(N. A. C. C. Rating)	
WHEELBASE	150, 172, 194 or 208 inches	BORE AND STROKE	4½ x 6½ inches
GAUGE	Front, 68 inches; rear, 75½ inches	LUBRICATION	Force feed
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Gravity
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
		DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

**STUDEBAKER
CORPORATION
OF AMERICA**
DETROIT
MICHIGAN


Price, Chassis	\$785
Express Body	850
Panel Body	875
Combination Passenger and Express	875
One-Ton Express	1200
One-Ton Stake Body	1250
Sixteen-Passenger Bus	1400

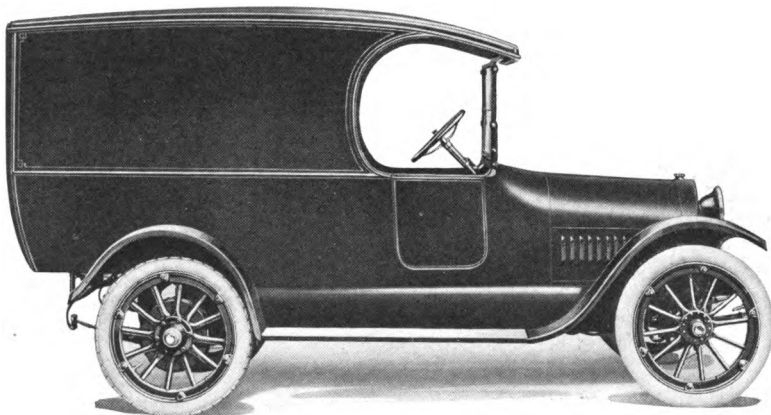

STUDEBAKER 1000-POUND COMMERCIAL CAR—SF

COLOR	Body, blue; running gear, black	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY	1000 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	24.03 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3½ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, wind-shield, speedometer, battery indicator and demountable rims.

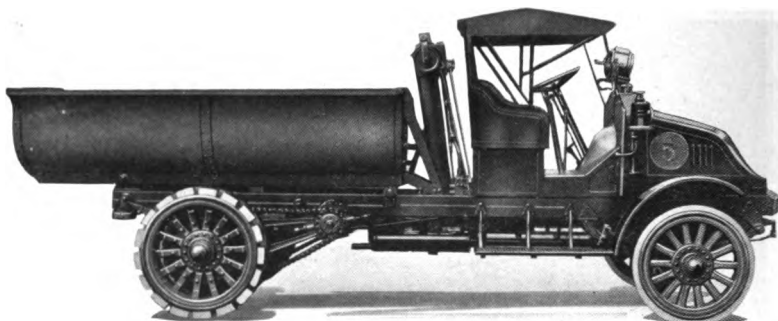


KELLY-SPRINGFIELD FIVE-TON TRUCK—K-50

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY	10,000 pounds	HORSEPOWER	32.4
POSITION OF DRIVER	Back of motor	(N. A. C. C. Rating)	
WHEELBASE	150, 172, 194 or 208 inches	BORE AND STROKE	4½ x 6½ inches
GAUGE	Front, 68 inches; rear, 75½ inches	LUBRICATION	Force feed
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE	Contracting on rear wheels	GASOLINE SYSTEM	Gravity
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
		DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

**STUDEBAKER
CORPORATION
OF AMERICA**
DETROIT
MICHIGAN

Price, Chassis	\$785
Express Body	850
Panel Body	875
Combination Passenger and Express	875
One-Ton Express	1200
One-Ton Stake Body	1250
Sixteen-Passenger Bus	1400

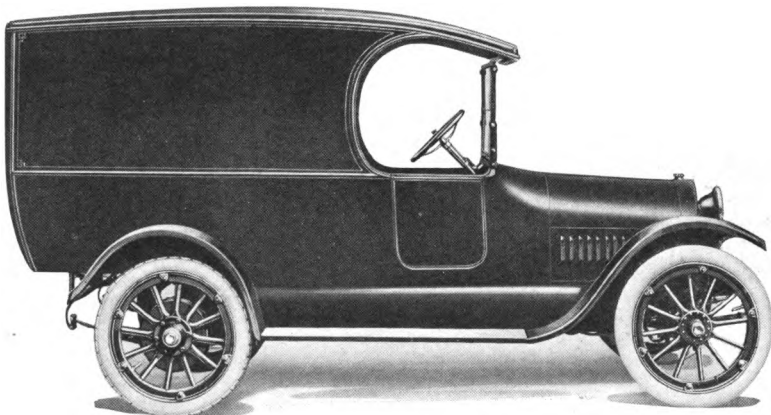


STUDEBAKER 1000-POUND COMMERCIAL CAR—SF

COLOR	Body, blue; running gear, black	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY	1000 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	112 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to crank shaft
FRONT TIRES	34 x 4 inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4 inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Single
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
CYLINDERS	Four	CLUTCH	Cone
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	En bloc	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	24.03 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	3 $\frac{1}{4}$ x 5 inches	REAR AXLE	Full floating
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes top, windshield, speedometer, battery indicator and demountable rims.

**P A C K A R D
M O T O R C A R
C O M P A N Y
D E T R O I T
M I C H I G A N**

Price, Chassis. \$2200
With Electric Starting and
Lighting 2425
One and One-half Ton . . . 2500
Two-Ton 2800

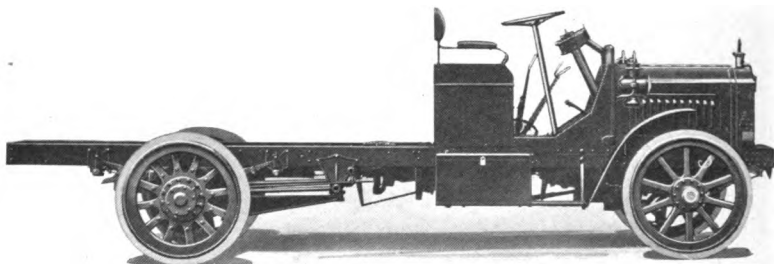


PACKARD ONE-TON TRUCK—ID

COLOR	Body, Packard blue with Packard light derby red striping; wheels, blue; chassis black	CAST	En bloc
CARRYING CAPACITY .	2000 pounds	HORSEPOWER	25.6 (N. A. C. C. Rating)
POSITION OF DRIVER .	Left side	BORE AND STROKE . .	4 x 5½ inches
WHEELBASE	126 or 144 inches	LUBRICATION	Force feed
GAUGE	56 inches	RADIATOR	Cellular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	34 x 3½ inches, single solid	IGNITION	High-tension magneto and storage battery
REAR TIRES	34 x 6 inches, single solid	GASOLINE SYSTEM . .	Pressure
SERVICE BRAKE . . .	Propeller shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE . .	Expanding on rear wheels	TRANSMISSION . . .	Progressive sliding
CYLINDERS	Four	GEAR CHANGES . . .	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and wheel

**PACKARD
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

Price, Chassis \$3400
**With Electric Light-
ing and Starting . 3625**
Four-Ton 3800

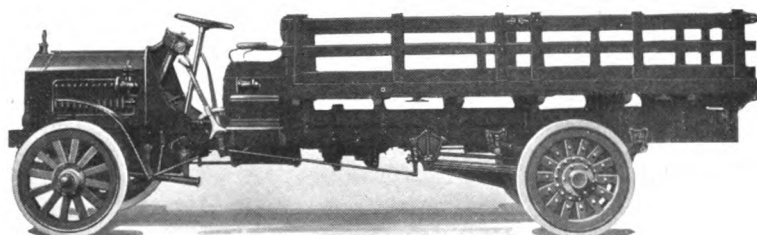

PACKARD THREE-TON TRUCK—3D

COLOR Body, Packard
blue, with Pack-
ard light derby
red striping;
wheels, Packard
light derby red,
with Packard
blue striping;
chassis, black

CARRYING CAPACITY . 6000 pounds

POSITION OF DRIVER . Left side

WHEELBASE 156 or 186 inches

GAUGE Rear wheels, 66
inches; front
wheels, 69½
inches

WHEELS Wood

FRONT TIRES 36 x 5 inches,
single solid

REAR TIRES 36 x 5 inches,
dual solid

SERVICE BRAKE . . . Propeller shaft

EMERGENCY BRAKE . Expanding on
rear wheels

CYLINDERS Four

ARRANGED Vertically

CAST En bloc

HORSEPOWER 32.4
(N. A. C. C. Rating)

BORE AND STROKE . 4½ x 5½ inches

LUBRICATION Full force feed

RADIATOR Cellular

COOLING Water pump

IGNITION High-tension
magneto and
storage battery

GASOLINE SYSTEM . Pressure

CLUTCH Dry multiple disc

TRANSMISSION . . . Progressive
sliding

GEAR CHANGES . . Three forward,
one reverse


DRIVE Worm

REAR AXLE Full floating

STEERING GEAR . . . Worm and wheel

**PACKARD
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

Price, Chassis.	\$2200
With Electric Starting and Lighting	2425
One and One-half Ton . . .	2500
Two-Ton	2800

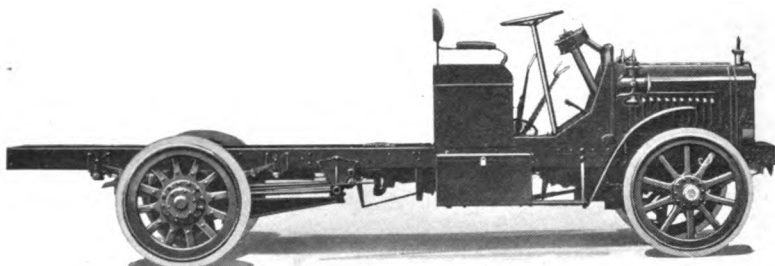


PACKARD ONE-TON TRUCK—ID

COLOR	Body, Packard blue with Pack- ard light derby red striping; wheels, blue; chassis black	CAST	En bloc
CARRYING CAPACITY	2000 pounds	HORSEPOWER	25.6 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	4 x 5½ inches
WHEELBASE	126 or 144 inches	LUBRICATION	Force feed
GAUGE	56 inches	RADIATOR	Cellular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	34 x 3½ inches, single solid	IGNITION	High-tension magneto and storage battery
REAR TIRES	34 x 6 inches, single solid	GASOLINE SYSTEM	Pressure
SERVICE BRAKE	Propeller shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Progressive sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR	Worm and wheel

**PACKARD
MOTOR CAR
COMPANY
DETROIT
MICHIGAN**

**Price, Chassis \$3400
With Electric Light-
ing and Starting . . 3625
Four-Ton 3800**

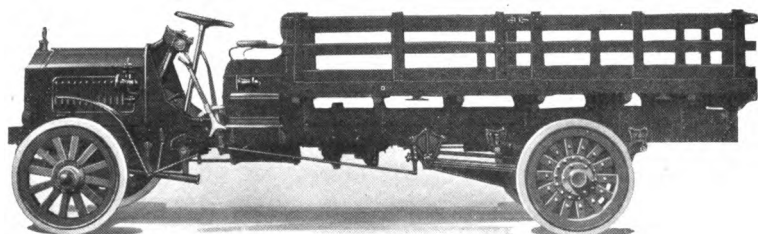


PACKARD THREE-TON TRUCK—3D

COLOR	Body, Packard blue, with Packard light derby red striping; wheels, Packard light derby red, with Packard blue striping; chassis, black	CYLINDERS	Four
CARRYING CAPACITY .	6000 pounds	ARRANGED	Vertically
POSITION OF DRIVER .	Left side	CAST	En bloc
WHEELBASE	156 or 186 inches	HORSEPOWER	32.4 (N. A. C. C. Rating)
GAUGE	Rear wheels, 66 inches; front wheels, 69 $\frac{3}{8}$ inches	BORE AND STROKE . .	4 $\frac{1}{2}$ x 5 $\frac{1}{2}$ inches
WHEELS	Wood	LUBRICATION	Full force feed
FRONT TIRES	36 x 5 inches, single solid	RADIATOR	Cellular
REAR TIRES	36 x 5 inches, dual solid	COOLING	Water pump
SERVICE BRAKE . . .	Propeller shaft	IGNITION	High-tension magneto and storage battery
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Pressure
		CLUTCH	Dry multiple disc
		TRANSMISSION . . .	Progressive sliding
		GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR . . .	Worm and wheel

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**

ELMIRA N. Y.

Price, \$9000

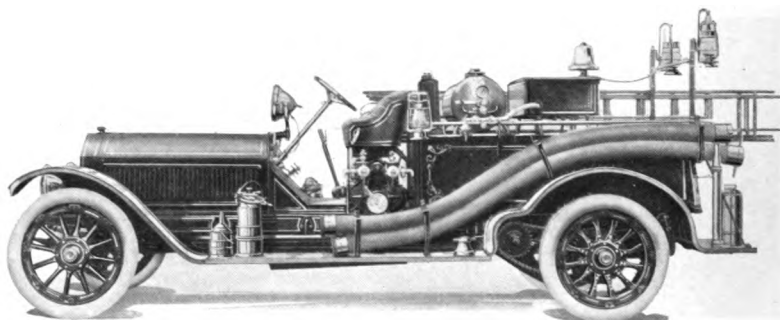


AMERICAN-LA FRANCE PUMPING ENGINE—TYPE 12

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	156¼ inches	COOLING	Water pump
GAUGE	Front, 62 inches; rear, 71¼ inches	IGNITION	High tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4½ inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	38 x 4½ inches, dual cushion	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	72.6	GEAR CHANGES	Three forward, one reverse
(N. A. C. C. Rating)		DRIVE	Side chain
BORE AND STROKE	5½ x 6 inches	REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes
speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**
AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.
ELMIRA N. Y.

Price, \$5500

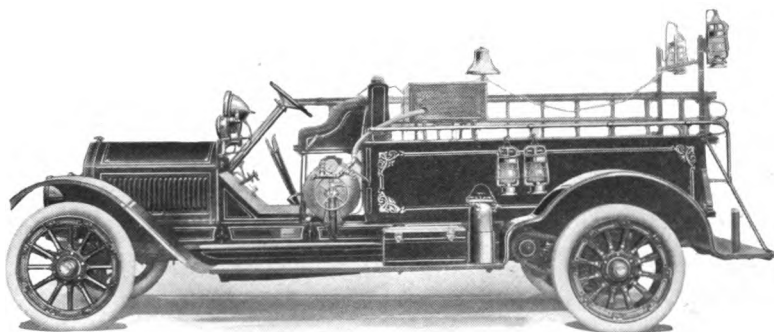


**AMERICAN-LA FRANCE CHEMICAL ENGINE AND HOSE CAR—
TYPE 10**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	156¾ inches	COOLING	Water pump
GAUGE	Front, 62 inches; rear, 71¼ inches	IGNITION	High tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4½ inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	38 x 4½ inches, dual cushion	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	48.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	5½ x 6 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes
speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**
INCORPORATED IN THE STATE OF NEW YORK
ELMIRA N. Y.

Price, \$10,000

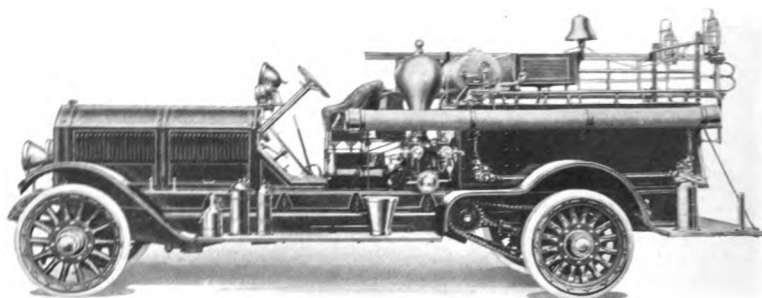

AMERICAN-LA FRANCE PUMPING ENGINE—TYPE 19


COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	165 inches	COOLING	Water pump
GAUGE	Front, 71 $\frac{3}{4}$ inches; rear, 81 $\frac{3}{4}$ inches	IGNITION	High tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 5 inches, single solid	STARTER OPERATED	Chain to crank shaft
REAR TIRES	38 x 4 inches, dual solid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Twelve
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	93.7 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	6 $\frac{1}{4}$ x 8 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes
speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**

ELMIRA N. Y.

Price, \$4500

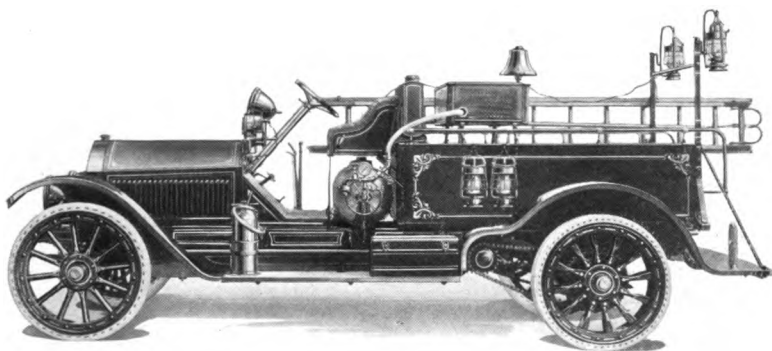


**AMERICAN-LA FRANCE CHEMICAL ENGINE AND HOSE CAR—
TYPE 20**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER.	Right side	RADIATOR	Cellular
WHEELBASE	140 $\frac{3}{4}$ inches	COOLING	Water pump
GAUGE	Front, 62 inches; rear, 71 $\frac{1}{4}$ inches	IGNITION	High-tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4 inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	38 x 3 $\frac{1}{2}$ inches, dual cushion	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Six	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In threes	TRANSMISSION	Selective sliding
HORSEPOWER	38.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	4 x 5 $\frac{1}{2}$ inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes
speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**
ELMIRA N. Y.

Price, \$3000

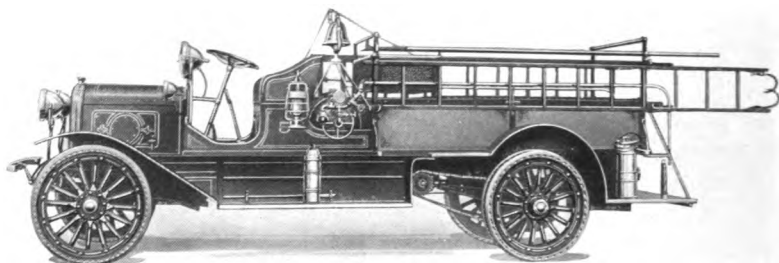


**AMERICAN-LA FRANCE COMBINATION CHEMICAL ENGINE
AND HOSE CAR—TYPE B**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	140 inches	COOLING	Water pump
GAUGE	58 inches	IGNITION	High tension magneto
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	36 x 4 inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	36 x 5 inches, dual cushion	LIGHTING SYSTEM	Gas
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	27.23 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	4½ x 5¼ inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**
ELMIRA N. Y.

Price, \$6000

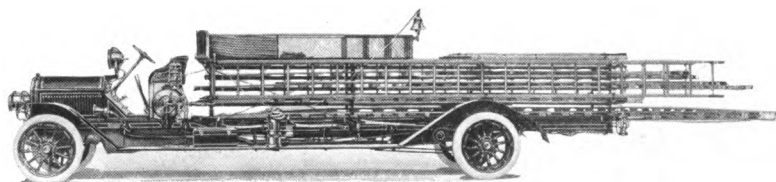


**AMERICAN-LA FRANCE SERVICE HOOK AND LADDER TRUCK—
TYPE 14**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER.	Right side	RADIATOR	Cellular
WHEELBASE	246 inches	COOLING	Water pump
GAUGE	Front, 62 inches; rear, 71¼ inches	IGNITION	High-tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4½ inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	38 x 4½ inches, dual cushion	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	48.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	5½ x 6 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**
ELMIRA N. Y.


Price, \$3000

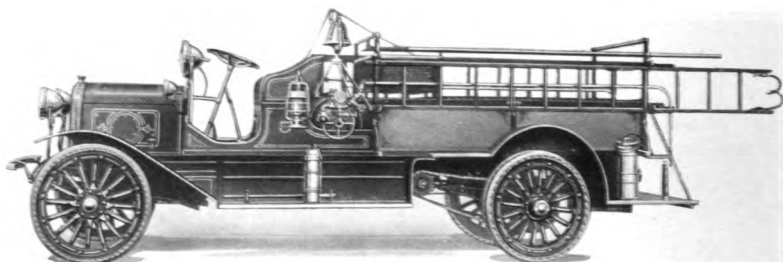

**AMERICAN-LA FRANCE COMBINATION CHEMICAL ENGINE
AND HOSE CAR—TYPE B**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	140 inches	COOLING	Water pump
GAUGE	58 inches	IGNITION	High tension magneto
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	36 x 4 inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	36 x 5 inches, dual cushion	LIGHTING SYSTEM	Gas
SERVICE BRAKE	Contracting on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Cone
CAST	En bloc	TRANSMISSION	Selective sliding
HORSEPOWER	27.23 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	4 1/8 x 5 1/4 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

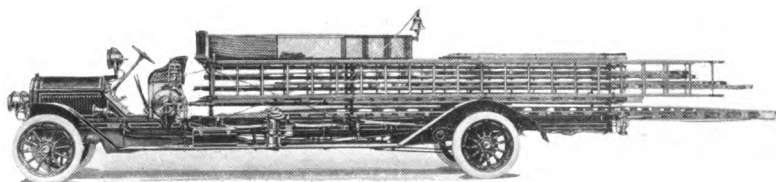


**AMERICAN-LA FRANCE SERVICE HOOK AND LADDER TRUCK—
TYPE 14**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	246 inches	COOLING	Water pump
GAUGE	Front, 62 inches; rear, 71¼ inches	IGNITION	High-tension magneto and storage battery
WHEELS	Wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4½ inches, single cushion	STARTER OPERATED	Gear to fly wheel
REAR TIRES	38 x 4½ inches, dual cushion	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on rear wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on rear wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	48.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	5½ x 6 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and gear

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

**REO MOTOR
CAR COMPANY**
**LANSING
MICHIGAN**

Price, Chassis	\$1650
With Low Stake Body	1800
With High Stake Body	1825
With Express Body	1810
Express Body with Top	1960
Express Body with Top and Screen Sides	2035

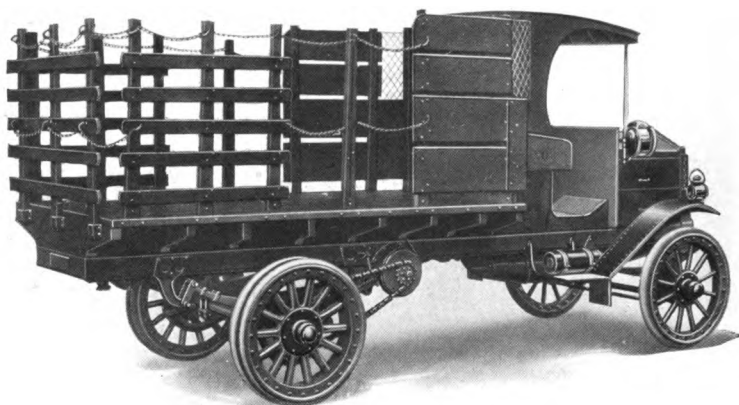


REO TWO-TON TRUCK—J

COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	4000 pounds	HORSEPOWER	27.23 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	4 1/4 x 4 1/2 inches
WHEELBASE	146 inches	LUBRICATION	Splash with circulating pump
GAUGE	Front, 59 3/4 inches; rear, 62 7/8 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 4 inches, solid	IGNITION	Low tension magneto and dry cells
REAR TIRES	36 x 3 1/2 inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on jack shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain drive to rear wheels
		REAR AXLE	Dead
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes cab

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.**
ELMIRA N. Y.

Price, \$8500

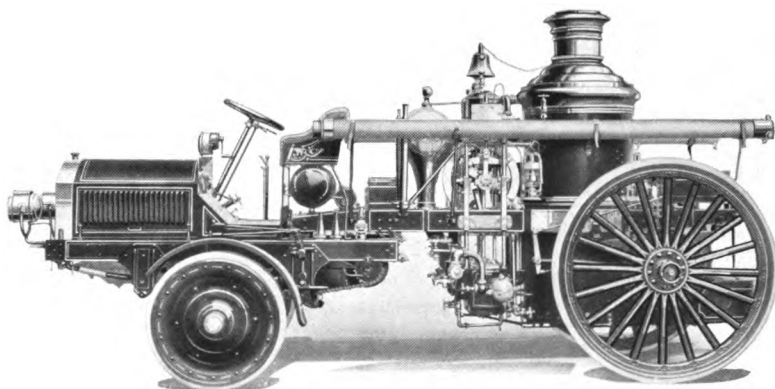


AMERICAN-LA FRANCE MOTOR STEAM FIRE ENGINE—TYPE 31

COLOR	Optional
POSITION OF DRIVER	Right side
WHEELBASE	126 inches
GAUGE	Front inner, 67¼ inches; front outer, 76¾ inches; rear, 62 inches
WHEELS	Front, cast steel; rear, wood
FRONT TIRES	38 x 4 inches dual solid
REAR TIRES	60 x 4 inches single solid
SERVICE BRAKE	Expanding on front wheels
EMERGENCY BRAKE	Expanding on front wheels
CYLINDERS	Four
ARRANGED	Vertically
CAST	In pairs
HORSEPOWER	48.4
(N. A. C. Rating)	

BORE AND STROKE	5½ x 6 inches
LUBRICATION	Force feed and splash
RADIATOR	Cellular
COOLING	Water pump
IGNITION	High tension magneto and storage battery
STARTING SYSTEM	Two unit
STARTER OPERATED	Gear to fly wheel
LIGHTING SYSTEM	Electric
VOLTAGES	Six
WIRING SYSTEM	Single
GASOLINE SYSTEM	Gravity
CLUTCH	Dry multiple disc
TRANSMISSION	Selective sliding
GEAR CHANGES	Three forward, one reverse
DRIVE	Side chain
REAR AXLE	Dead
STEERING GEAR	Worm and sleeve

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

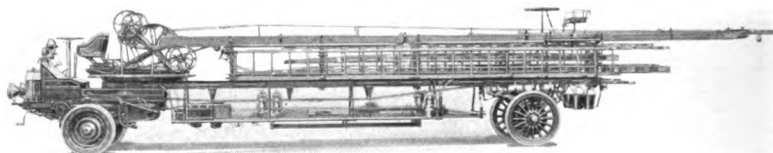


AMERICAN LA-FRANCE AERIAL HOOK AND LADDER TRUCK— TYPE 31

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	333 inches	COOLING	Water pump
GAUGE	Front inner, 67¼ inches; front outer, 76¾ inches; rear, 62 inches	IGNITION	High tension magneto and storage battery
WHEELS	Front, cast steel; rear, wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4 inches dual solid	STARTER OPERATED	Gear to fly wheel
REAR TIRES	42 x 4 inches single solid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on front wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on front wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	48.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	5½ x 6 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Front, worm and sleeve; rear, worm and sector

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.
ELMIRA N. Y.**

Price, \$8500

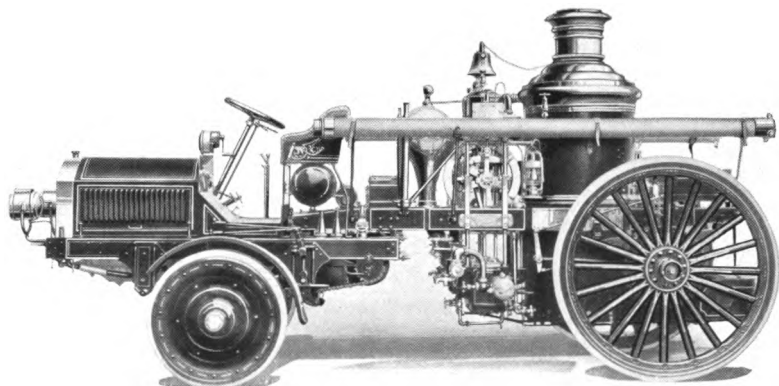


AMERICAN-LA FRANCE MOTOR STEAM FIRE ENGINE—TYPE 31

COLOR	Optional	BORE AND STROKE	5½ x 6 inches
POSITION OF DRIVER	Right side	LUBRICATION	Force feed and splash
WHEELBASE	126 inches	RADIATOR	Cellular
GAUGE	Front inner, 67¼ inches; front outer, 76¾ inches; rear, 62 inches	COOLING	Water pump
WHEELS	Front, cast steel; rear, wood	IGNITION	High tension magneto and storage battery
FRONT TIRES	38 x 4 inches dual solid	STARTING SYSTEM	Two unit
REAR TIRES	60 x 4 inches single solid	STARTER OPERATED	Gear to fly wheel
SERVICE BRAKE	Expanding on front wheels	LIGHTING SYSTEM	Electric
EMERGENCY BRAKE	Expanding on front wheels	VOLTAGES	Six
CYLINDERS	Four	WIRING SYSTEM	Single
ARRANGED	Vertically	GASOLINE SYSTEM	Gravity
CAST	In pairs	CLUTCH	Dry multiple disc
HORSEPOWER	48.4	TRANSMISSION	Selective sliding
(N. A. C. C. Rating)		GEAR CHANGES	Three forward, one reverse
		DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Worm and sleeve

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

**REO MOTOR
CAR COMPANY**
LANSING
MICHIGAN


Price, Chassis	\$1650
With Low Stake Body	1800
With High Stake Body	1825
With Express Body	1810
Express Body with Top	1960
Express Body with Top and Screen Sides	2035

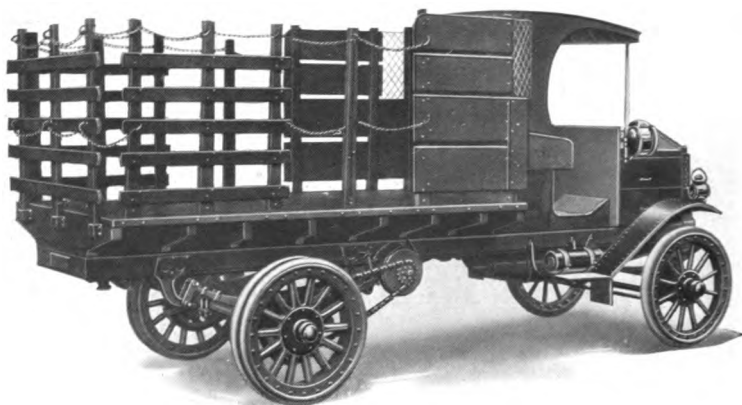

REO TWO-TON TRUCK—J

COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	4000 pounds	HORSEPOWER	27.23 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	4 1/8 x 4 1/2 inches
WHEELBASE	146 inches	LUBRICATION	Splash with circulating pump
GAUGE	Front, 59 3/4 inches; rear, 62 3/4 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 4 inches, solid	IGNITION	Low tension magneto and dry cells
REAR TIRES	36 x 3 1/2 inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on jack shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain drive to rear wheels
		REAR AXLE	Dead
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes cab

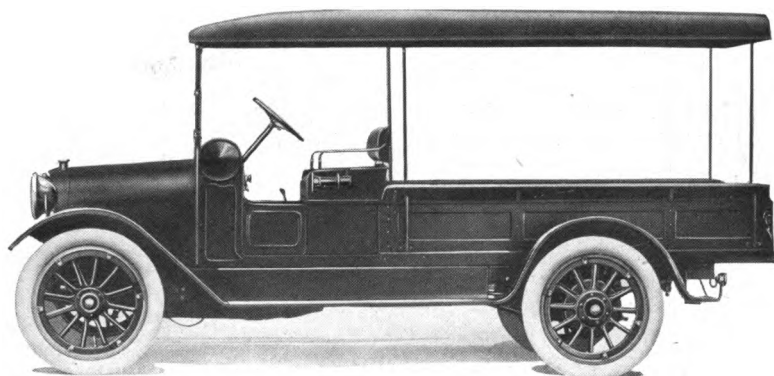


REO THREE-QUARTER-TON TRUCK—F

COLOR	Body, golden olive, running gear, red	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY	1500 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	120 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to transmission shaft
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	27.23 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	4½ x 4½ inches	REAR AXLE	Full floating
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, windshield, speedometer, ammeter and demountable rims

**REO MOTOR
CAR COMPANY**
**LANSING
MICHIGAN**


Price, Chassis	\$1650
With Low Stake Body	1800
With High Stake Body	1825
With Express Body	1810
Express Body with Top	1960
Express Body with Top and Screen Sides	2035

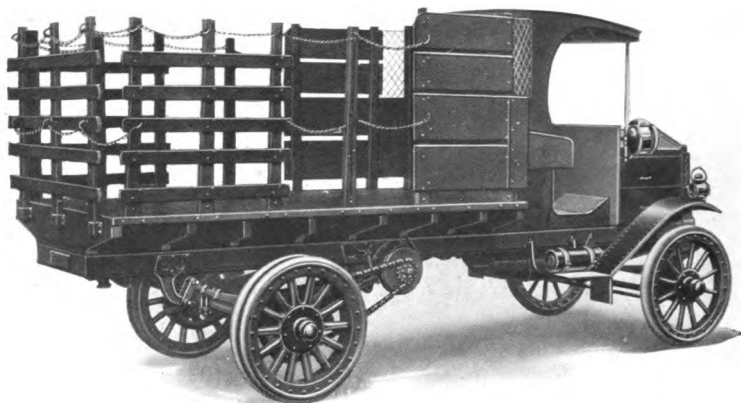

REO TWO-TON TRUCK—J

COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	4000 pounds	HORSEPOWER	27.23 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	4 1/8 x 4 1/2 inches
WHEELBASE	146 inches	LUBRICATION	Splash with circulating pump
GAUGE	Front, 59 3/4 inches; rear, 62 1/8 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 4 inches, solid	IGNITION	Low tension magneto and dry cells
REAR TIRES	36 x 3 1/2 inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on jack shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain drive to rear wheels
		REAR AXLE	Dead
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes cab

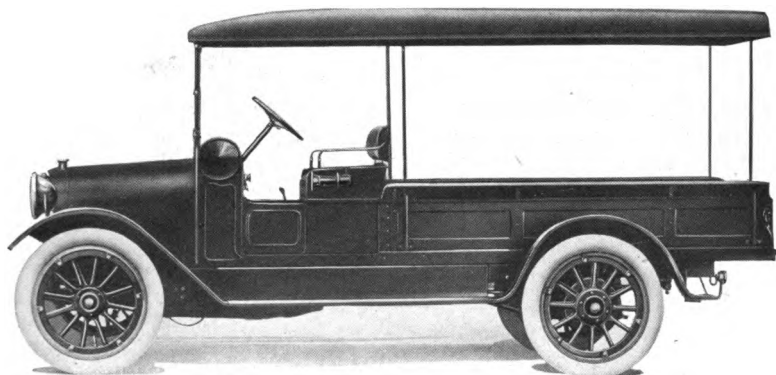

REO THREE-QUARTER-TON TRUCK—F

COLOR	Body, golden olive, running gear, red	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY .	1500 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	120 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM . .	Two unit
WHEELS	Wood	STARTER OPERATED .	Chain to transmission shaft
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM . .	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE . . .	Contracting on rear wheels	WIRING SYSTEM . . .	Double
EMERGENCY BRAKE .	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES . . .	Three forward, one reverse
HORSEPOWER	27.23 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE .	4½ x 4½ inches	REAR AXLE	Full floating
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, windshield, speedometer, ammeter and demountable rims


**THE GRAMM
MOTOR TRUCK
CO., MANUFAC-
TURERS OF
GARFORD
MOTOR
TRUCKS**

LIMA, OHIO

Price, Chassis . \$1800

One-Ton 1450

Two-Ton 2300

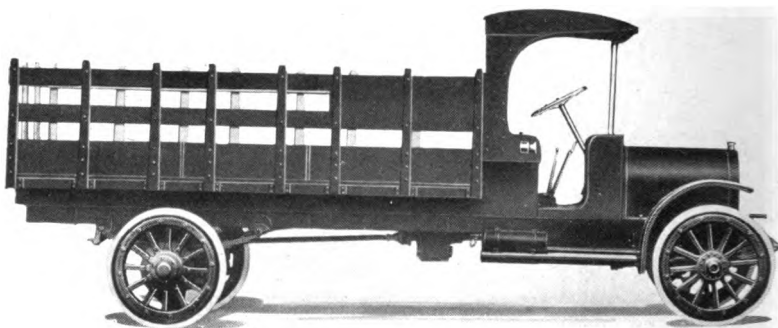


GARFORD ONE-AND-ONE-HALF-TON TRUCK—66

COLOR	Optional	CAST	En bloc
CARRYING CAPACITY	3000 pounds	HORSEPOWER	22.5
POSITION OF DRIVER	Optional	(N. A. C. C. Rating)	
WHEELBASE	142 or 166 inches	BORE AND STROKE	3¾ x 5½ inches
GAUGE	Front, 56½ inches; rear, 58¾ inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 3½ inches, solid	COOLING	Water pump
REAR TIRES	36 x 5 inches, solid	IGNITION	High-tension magneto
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
		DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR	Worm and nut

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

Price, Chassis \$4300
Three-Ton . . . 3400
Six-Ton . . . 4500

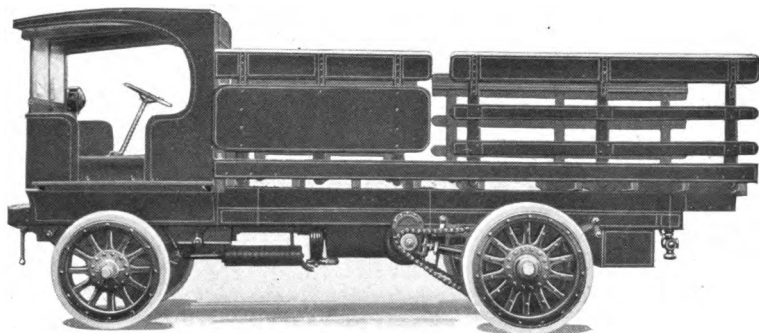


GARFORD FIVE-TON TRUCK—D

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY .	Five tons	HORSEPOWER	36.1
POSITION OF DRIVER	Right side	(N. A. C. C. Rating)	
WHEELBASE	128 or 150 inches	BORE AND STROKE .	4¾ x 5½ inches
GAUGE	Front, 62½ inches; rear, 71 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE . . .	Contracting on transmission countershaft	GASOLINE SYSTEM .	Gravity
EMERGENCY BRAKE .	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION . . .	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . .	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Dead
		STEERING GEAR . . .	Worm and nut

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS
LIMA, OHIO**

**Price, Chassis . \$1800
One-Ton . . . 1450
Two-Ton . . . 2300**

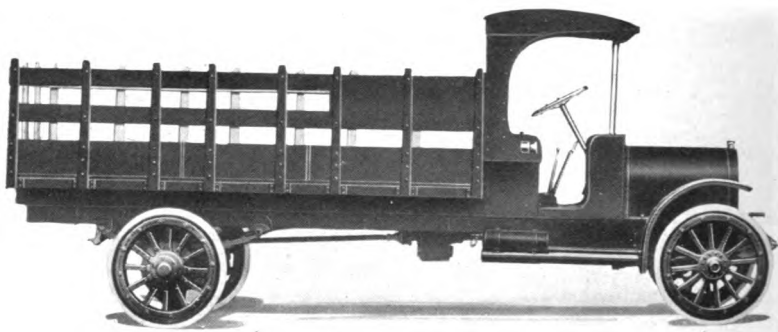


GARFORD ONE-AND-ONE-HALF-TON TRUCK—66

COLOR Optional
CARRYING CAPACITY . . . 3000 pounds
POSITION OF DRIVER . . . Optional
WHEELBASE 142 or 166 inches
GAUGE Front, 56½ inches;
rear, 58¼ inches
WHEELS Wood
FRONT TIRES 36 x 3½ inches,
solid
REAR TIRES 36 x 5 inches,
solid
SERVICE BRAKE Expanding on
rear wheels
EMERGENCY BRAKE . . . Contracting on
rear wheels
CYLINDERS Four
ARRANGED Vertical

CAST bloc
HORSEPOWER 15
(N. A. ing)
BORE AND STROKE x 5½ inches
LUBRICATION ash with cir
RADIATOR ating p
COOLING dilu
IGNITION W
G

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

**Price, Chassis \$4300
Three-Ton . . . 3400
Six-Ton . . . 4500**

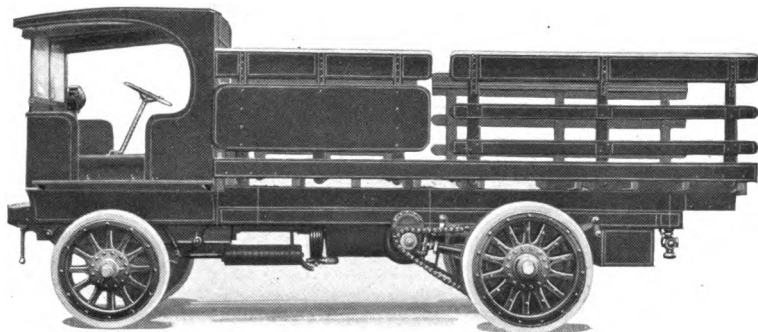

GARFORD FIVE-TON TRUCK—D

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY	Five tons	HORSEPOWER	36.1
POSITION OF DRIVER	Right side	(N. A. C. C. Rating)	
WHEELBASE	128 or 150 inches	BORE AND STROKE	4¾ x 5½ inches
GAUGE	Front, 62½ inches; rear, 71 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE	Contracting on transmission countershaft	GASOLINE SYSTEM	Gravity
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

2000年12月21日 星期四 晴

With Undertaker's Body . .	875
With Express Body	775




Journal Pre-proof

COLOR	Body, blue; wheels, red	BORE AND STROKE	3 x 4 1/2 inches
CARRYING CAPACITY	1000 pounds	LUBRICATION	Full splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	100 inches	COOLING	Water
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	LIGHTING SYSTEM	Gas
FRONT TIRES	31 x 4 inches	GASOLINE SYSTEM	Gravity
REAR TIRES	31 x 4 inches	CLUTCH	Cone
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Plain bevel
ARRANGED	Vertically	REAR AXLE	Three-quarters floating
CAST	En bloc	STEERING GEAR	Worm and sector
HORSEPOWER	14.4		
(N. A. C. C. Rating)			

© 2006 The Authors
Journal compilation © 2006 Blackwell Publishing Ltd

**KISSEL MOTOR
CAR COMPANY**
HARTFORD
WISCONSIN

Price, Chassis \$950
With Standard Stake or Express
Body 1075

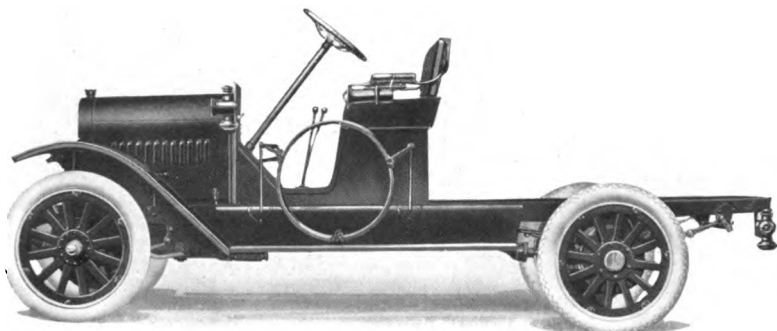


KISSEL-KAR ONE-THOUSAND-POUND DELIVERY

COLOR	Lead	HORSEPOWER	24.03 (N. A. C. C. Rating)
CARRYING CAPACITY	1000 pounds	BORE AND STROKE	3 $\frac{1}{4}$ x 5 $\frac{1}{2}$ inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	115 inches	RADIATOR	Square tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	32 x 4 inches	GASOLINE SYSTEM	Vacuum
REAR TIRES	32 x 4 inches, anti-skid	CLUTCH	Cone
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Contracting on rear wheels	GEAR CHANGES	Three
CYLINDERS	Four	DRIVE	Spiral bevel
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Split nut and worm

**AMERICAN-
LA FRANCE
FIRE ENGINE
COMPANY, INC.
ELMIRA N. Y.**


Price . . \$9500 to \$11,000

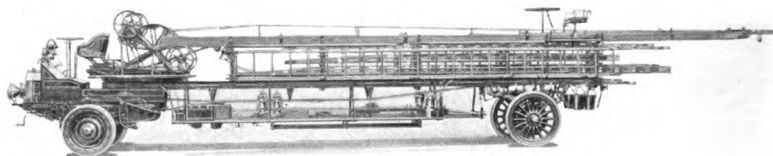

**AMERICAN LA-FRANCE AERIAL HOOK AND LADDER TRUCK—
TYPE 31**

COLOR	Optional	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Right side	RADIATOR	Cellular
WHEELBASE	333 inches	COOLING	Water pump
GAUGE	Front inner, 67¼ inches; front outer, 76¾ inches; rear, 62 inches	IGNITION	High tension magneto and storage battery
WHEELS	Front, cast steel; rear, wood	STARTING SYSTEM	Two unit
FRONT TIRES	38 x 4 inches dual solid	STARTER OPERATED	Gear to fly wheel
REAR TIRES	42 x 4 inches single solid	LIGHTING SYSTEM	Electric
SERVICE BRAKE	Expanding on front wheels	VOLTAGES	Six
EMERGENCY BRAKE	Expanding on front wheels	WIRING SYSTEM	Single
CYLINDERS	Four	GASOLINE SYSTEM	Gravity
ARRANGED	Vertically	CLUTCH	Dry multiple disc
CAST	In pairs	TRANSMISSION	Selective sliding
HORSEPOWER	48.4 (N. A. C. C. Rating)	GEAR CHANGES	Three forward, one reverse
BORE AND STROKE	5¼ x 6 inches	DRIVE	Side chain
		REAR AXLE	Dead
		STEERING GEAR	Front, worm and sleeve; rear, worm and sector

In addition to above specifications, price includes speedometer, ammeter, voltmeter and demountable rims

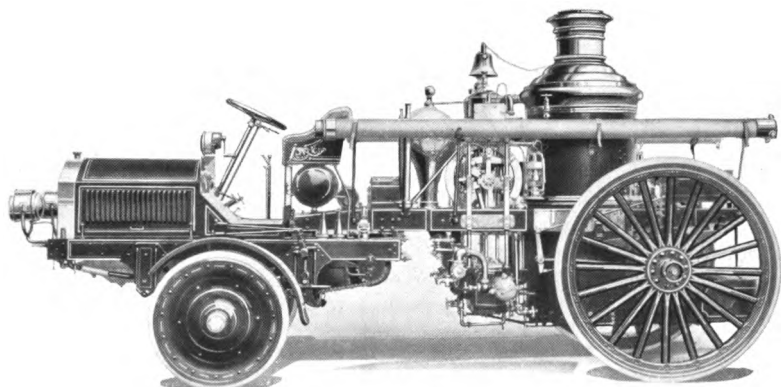

AMERICAN-LA FRANCE MOTOR STEAM FIRE ENGINE—TYPE 31


COLOR Optional
POSITION OF DRIVER. Right side
WHEELBASE 126 inches
GAUGE Front inner, 67¼
inches; front
outer, 76¼ in-
ches; rear, 62
inches
WHEELS Front, cast steel;
rear, wood
FRONT TIRES 38 x 4 inches
dual solid
REAR TIRES 60 x 4 inches
single solid
SERVICE BRAKE . . Expanding on
front wheels
EMERGENCY BRAKE . Expanding on
front wheels
CYLINDERS Four
ARRANGED Vertically
CAST In pairs
HORSEPOWER 48.4
(N. A. C. C. Rating)

BORE AND STROKE . . 5½ x 6 inches
LUBRICATION Force feed and
splash
RADIATOR Cellular
COOLING Water pump
IGNITION High tension
magneto and
storage battery
STARTING SYSTEM . . Two unit
STARTER OPERATED . Gear to fly wheel
LIGHTING SYSTEM . . Electric
VOLTAGES Six
WIRING SYSTEM . . . Single
GASOLINE SYSTEM . . Gravity
CLUTCH Dry multiple disc
TRANSMISSION . . . Selective sliding
GEAR CHANGES . . . Three forward,
one reverse
DRIVE Side chain
REAR AXLE Dead
STEERING GEAR . . . Worm and sleeve

In addition to above specifications, price includes
speedometer, ammeter, voltmeter and demountable rims

**REO MOTOR
CAR COMPANY**
LANSING
MICHIGAN


Price, Chassis	\$1650
With Low Stake Body	1800
With High Stake Body	1825
With Express Body	1810
Express Body with Top	1960
Express Body with Top and Screen Sides	2035

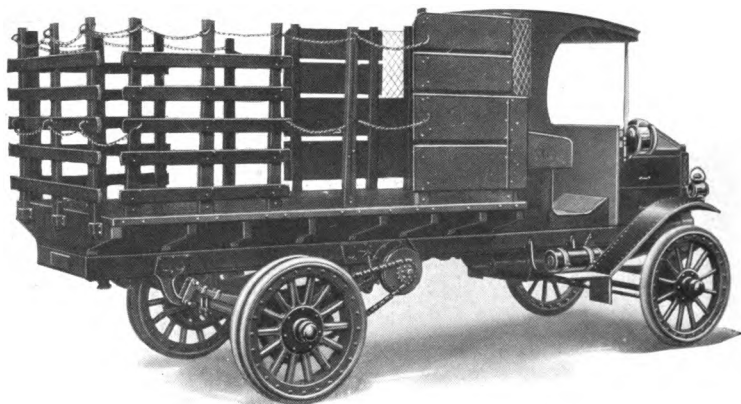

REO TWO-TON TRUCK—J

COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	4000 pounds	HORSEPOWER	27.23 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	4½ x 4½ inches
WHEELBASE	146 inches	LUBRICATION	Splash with circulating pump
GAUGE	Front, 59¾ inches; rear, 62½ inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 4 inches, solid	IGNITION	Low tension magneto and dry cells
REAR TIRES	36 x 3½ inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on jack shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain drive to rear wheels
		REAR AXLE	Dead
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes cab

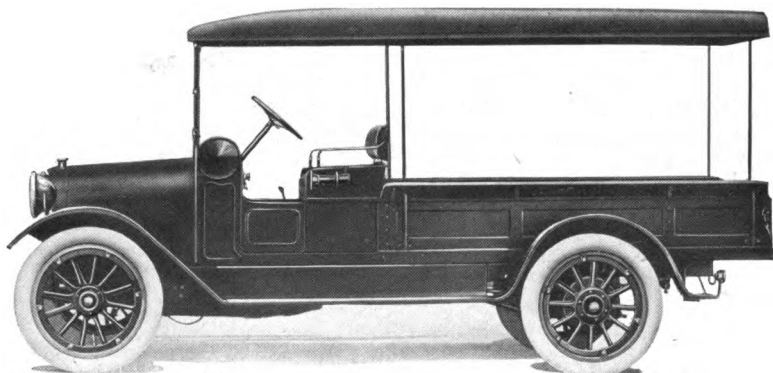


REO THREE-QUARTER-TON TRUCK—F

COLOR	Body, golden olive, running gear, red	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY	1500 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	120 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to transmission shaft
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	27.23 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	4⅞ x 4½ inches	REAR AXLE	Full floating
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, windshield, speedometer, ammeter and demountable rims

**REO MOTOR
CAR COMPANY**
LANSING
MICHIGAN


Price, Chassis	\$1650
With Low Stake Body	1800
With High Stake Body	1825
With Express Body	1810
Express Body with Top	1960
Express Body with Top and Screen Sides	2035

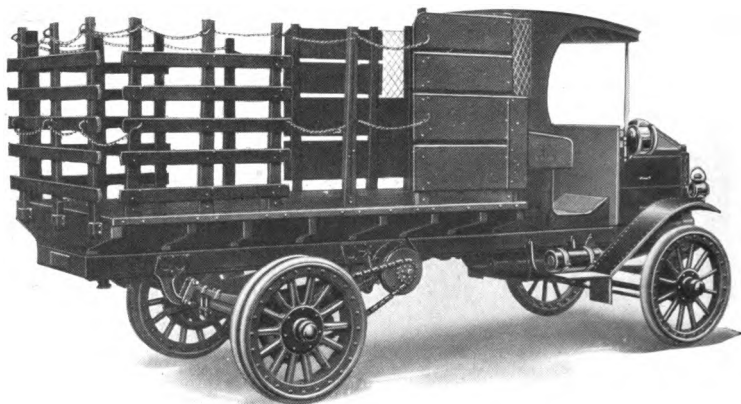

REO TWO-TON TRUCK—J

COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	4000 pounds	HORSEPOWER	27.23
POSITION OF DRIVER	Left side	(N. A. C. C. Rating)	
WHEELBASE	146 inches	BORE AND STROKE	4 1/8 x 4 1/2 inches
GAUGE	Front, 59 3/4 inches; rear, 62 1/8 inches	LUBRICATION	Splash with cir- culating pump
WHEELS	Wood	RADIATOR	Tubular
FRONT TIRES	36 x 4 inches, solid	COOLING	Water pump
REAR TIRES	36 x 3 1/2 inches, dual solid	IGNITION	Low tension magneto and dry cells
SERVICE BRAKE	Contracting on jack shaft	GASOLINE SYSTEM	Gravity
EMERGENCY BRAKE	Contracting on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three forward, one reverse
		DRIVE	Side chain drive to rear wheels
		REAR AXLE	Dead
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes cab

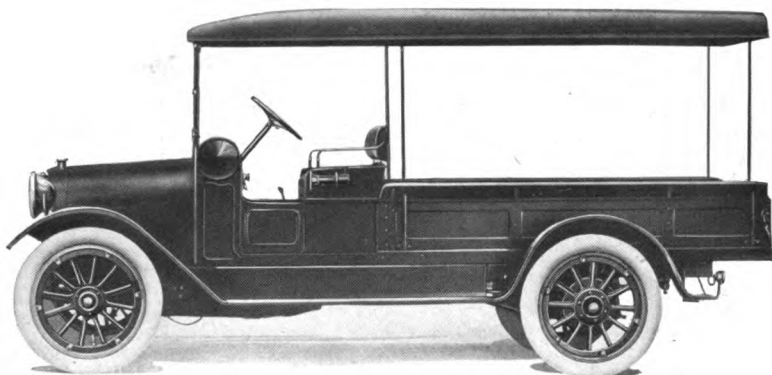


REO THREE-QUARTER-TON TRUCK—F

COLOR	Body, golden olive, running gear, red	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY	1500 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	120 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to transmission shaft
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	27.23	DRIVE	Plain bevel
(N. A. C. C. Rating)		REAR AXLE	Full floating
BORE AND STROKE	4⅞ x 4½ inches	STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, windshield, speedometer, ammeter and demountable rims

**REO MOTOR
CAR COMPANY**
LANSING
MICHIGAN

Price, Chassis	\$1650
With Low Stake Body	1800
With High Stake Body	1825
With Express Body	1810
Express Body with Top	1960
Express Body with Top and Screen Sides	2035

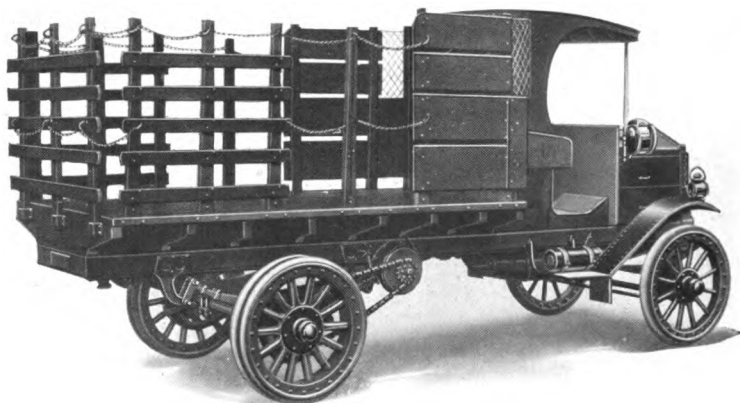

REO TWO-TON TRUCK—J


COLOR	Lead	CAST	In pairs
CARRYING CAPACITY	4000 pounds	HORSEPOWER	27.23 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	4½ x 4½ inches
WHEELBASE	146 inches	LUBRICATION	Splash with circulating pump
GAUGE	Front, 59¾ inches; rear, 62½ inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Water pump
FRONT TIRES	36 x 4 inches, solid	IGNITION	Low tension magneto and dry cells
REAR TIRES	36 x 3½ inches, dual solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on jack shaft	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three forward, one reverse
ARRANGED	Vertically	DRIVE	Side chain drive to rear wheels
		REAR AXLE	Dead
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes cab

REO MOTOR CAR COMPANY

LANSING
MICHIGAN

Price, \$1075

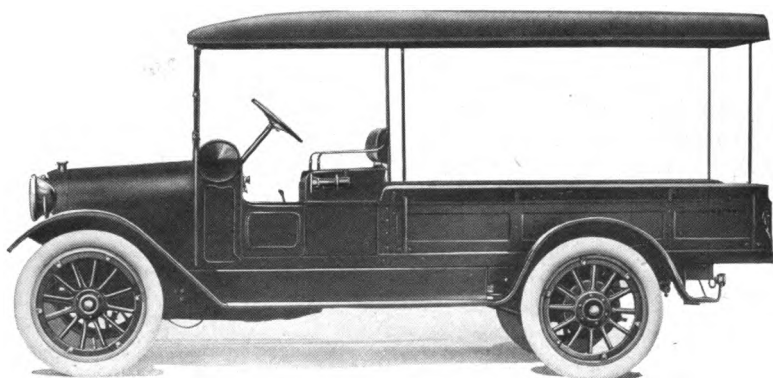


REO THREE-QUARTER-TON TRUCK—F

COLOR	Body, golden olive, running gear, red	LUBRICATION	Splash with circulating pump
CARRYING CAPACITY	1500 pounds	RADIATOR	Tubular
POSITION OF DRIVER	Left side	COOLING	Water pump
WHEELBASE	120 inches	IGNITION	Storage battery
GAUGE	56 inches	STARTING SYSTEM	Two unit
WHEELS	Wood	STARTER OPERATED	Chain to transmission shaft
FRONT TIRES	34 x 4½ inches	LIGHTING SYSTEM	Electric
REAR TIRES	34 x 4½ inches, anti-skid	VOLTAGES	Six
SERVICE BRAKE	Contracting on rear wheels	WIRING SYSTEM	Double
EMERGENCY BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Gravity
CYLINDERS	Four	CLUTCH	Dry multiple disc
ARRANGED	Vertically	TRANSMISSION	Selective sliding
CAST	In pairs	GEAR CHANGES	Three forward, one reverse
HORSEPOWER	27.23 (N. A. C. C. Rating)	DRIVE	Plain bevel
BORE AND STROKE	4½ x 4½ inches	REAR AXLE	Full floating
		STEERING GEAR	Pinion and sector

In addition to above specifications, price includes top, windshield, speedometer, ammeter and demountable rims

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

Price, Chassis . . \$1800
One-Ton. . . . 1450
Two-Ton. . . . 2300

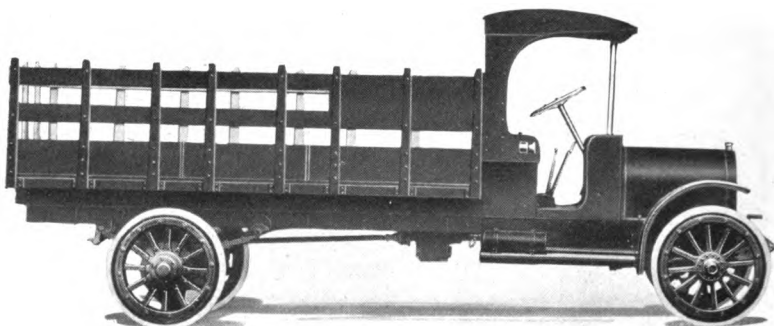


GARFORD ONE-AND-ONE-HALF-TON TRUCK—66

COLOR	Optional	CAST	En bloc
CARRYING CAPACITY .	3000 pounds	HORSEPOWER	22.5
POSITION OF DRIVER .	Optional	(N. A. C. C. Rating)	
WHEELBASE	142 or 166 inches	BORE AND STROKE .	3 3/4 x 5 1/2 inches
GAUGE	Front, 56 1/2 inches; rear, 58 3/4 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 3 1/2 inches, solid	COOLING	Water pump
REAR TIRES	36 x 5 inches, solid	IGNITION	High-tension magneto
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE . .	Contracting on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Three forward, one reverse
		DRIVE	Worm
		REAR AXLE	Full floating
		STEERING GEAR	Worm and nut

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

Price, Chassis \$4300
Three-Ton . . . 3400
Six-Ton . . . 4500

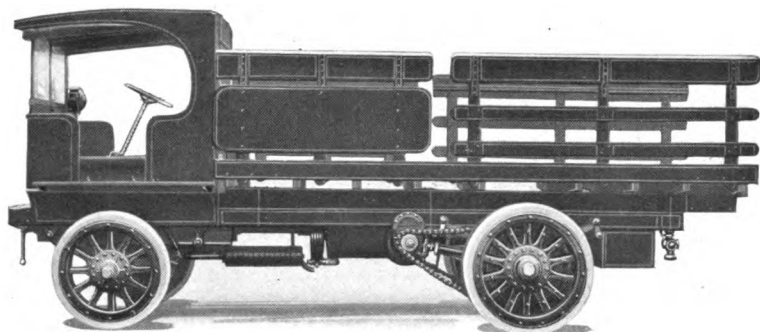


GARFORD FIVE-TON TRUCK—D

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY .	Five tons	HORSEPOWER	36.1
POSITION OF DRIVER	Right side		(N. A. C. C. Rating)
WHEELBASE	128 or 150 inches	BORE AND STROKE . .	4½ x 5½ inches
GAUGE	Front, 62½ inches; rear, 71 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE . . .	Contracting on transmission countershaft	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE .	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

Price, Chassis . \$1800
One-Ton. . . . 1450
Two-Ton. . . . 2300

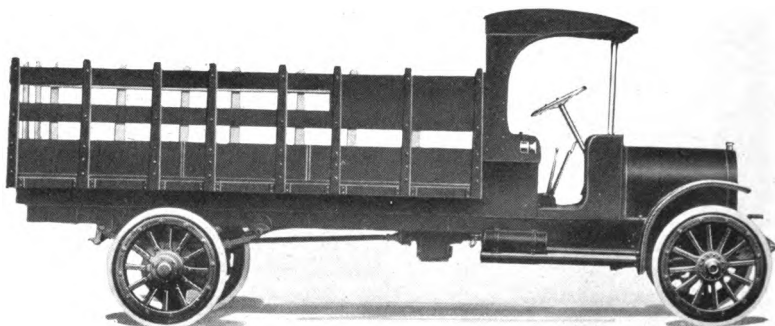


GARFORD ONE-AND-ONE-HALF-TON TRUCK—66

COLOR Optional
CARRYING CAPACITY 3000 pounds
POSITION OF DRIVER Optional
WHEELBASE 142 or 166 inches
GAUGE Front, 56½ inches; rear, 58¾ inches
WHEELS Wood
FRONT TIRES 36 x 3½ inches, solid
REAR TIRES 36 x 5 inches, solid
SERVICE BRAKE Expanding on rear wheels
EMERGENCY BRAKE Contracting on rear wheels
CYLINDERS Four
ARRANGED Vertically

CAST En bloc
HORSEPOWER 22.5
(N. A. C. C. Rating)
BORE AND STROKE 3¼ x 5½ inches
LUBRICATION Splash with circulating pump
RADIATOR Cellular
COOLING Water pump
IGNITION High-tension magneto
GASOLINE SYSTEM Gravity
CLUTCH Dry multiple disc
TRANSMISSION Selective sliding
GEAR CHANGES Three forward, one reverse
DRIVE Worm
REAR AXLE Full floating
STEERING GEAR Worm and nut

**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

Price, Chassis \$4300
Three-Ton . . . 3400
Six-Ton . . . 4500

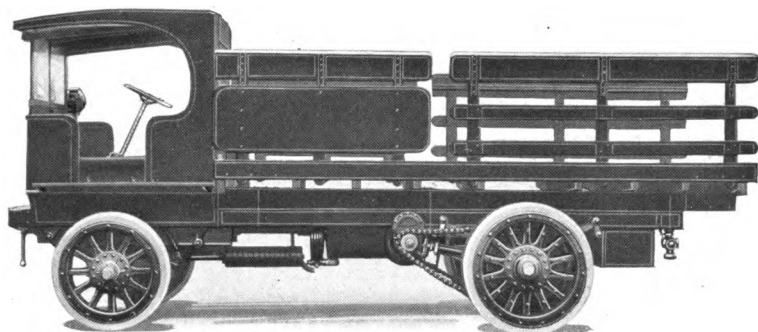


GARFORD FIVE-TON TRUCK—D

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY .	Five tons	HORSEPOWER	36.1
POSITION OF DRIVER	Right side		(N. A. C. C. Rating)
WHEELBASE	128 or 150 inches	BORE AND STROKE . .	4¾ x 5½ inches
GAUGE	Front, 62½ inches; rear, 71 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE	Contracting on transmission countershaft	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE . .	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

**THE GRAMM
MOTOR TRUCK
CO., MANUFAC-
TURERS OF
GARFORD
MOTOR
TRUCKS**
LIMA, OHIO

Price, Chassis . \$1800
One-Ton 1450
Two-Ton 2300

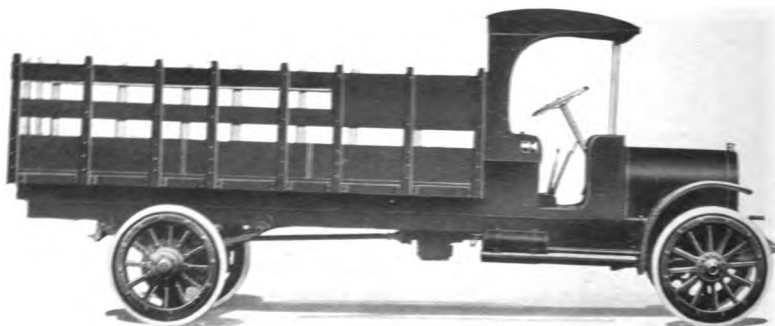

GARFORD ONE-AND-ONE-HALF-TON TRUCK—66

COLOR Optional
CARRYING CAPACITY . 3000 pounds
POSITION OF DRIVER . Optional
WHEELBASE 142 or 166 inches
GAUGE Front, 56½ inches; rear, 58¾ inches
WHEELS Wood
FRONT TIRES 36 x 3½ inches, solid
REAR TIRES 36 x 5 inches, solid
SERVICE BRAKE . . . Expanding on rear wheels
EMERGENCY BRAKE . Contracting on rear wheels
CYLINDERS Four
ARRANGED Vertically

CAST En bloc
HORSEPOWER 22.5
(N. A. C. C. Rating)
BORE AND STROKE . 3¼ x 5½ inches
LUBRICATION Splash with circulating pump
RADIATOR Cellular
COOLING Water pump
IGNITION High-tension magneto
GASOLINE SYSTEM . Gravity
CLUTCH Dry multiple disc
TRANSMISSION . . . Selective sliding
GEAR CHANGES . . Three forward, one reverse
DRIVE Worm
REAR AXLE Full floating
STEERING GEAR . . . Worm and nut


**THE GRAMM
MOTOR TRUCK
CO., MANUFACTURERS OF
GARFORD
MOTOR
TRUCKS**

LIMA, OHIO

Price, Chassis \$4300

Three-Ton . . . 3400

Six-Ton . . . 4500

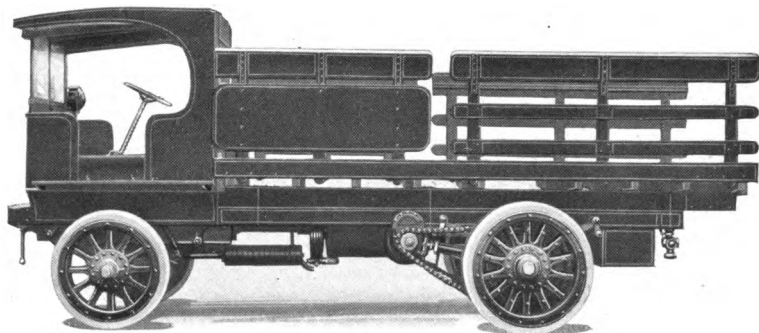


GARFORD FIVE-TON TRUCK—D

COLOR	Optional	CAST	In pairs
CARRYING CAPACITY .	Five tons	HORSEPOWER	36.1
POSITION OF DRIVER	Right side	(N. A. C. C. Rating)	
WHEELBASE	128 or 150 inches	BORE AND STROKE . .	4¾ x 5¼ inches
GAUGE	Front, 62½ inches; rear, 71 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Cellular
FRONT TIRES	36 x 6 inches, single solid	COOLING	Water pump
REAR TIRES	40 x 6 inches, dual solid	IGNITION	High-tension magneto
SERVICE BRAKE . . .	Contracting on transmission countershaft	GASOLINE SYSTEM . .	Gravity
EMERGENCY BRAKE .	Expanding on rear wheels	CLUTCH	Dry multiple disc
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES . . .	Four forward, one reverse
		DRIVE	Plain bevel
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

**VIM MOTOR
TRUCK
COMPANY**
MANUFACTURERS OF MOTOR TRUCKS, BUSES, AND AUTOMOBILES
PHILADELPHIA, PA.

Price	\$725
With Jitney Body	975
With Undertaker's Body	875
With Express Body	775

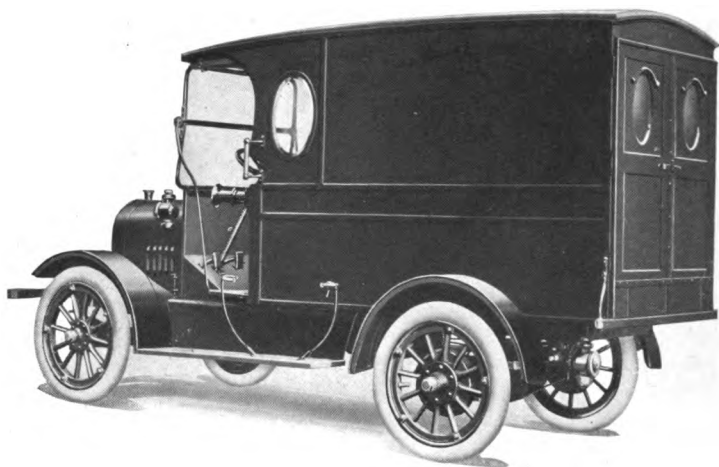


VIM HALF-TON DE LUXE DELIVERY

COLOR	Body, blue; wheels, red	BORE AND STROKE	3 x 4½ inches
CARRYING CAPACITY	1000 pounds	LUBRICATION	Full splash
POSITION OF DRIVER	Left side	RADIATOR	Cellular
WHEELBASE	100 inches	COOLING	Water
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	LIGHTING SYSTEM	Gas
FRONT TIRES	31 x 4 inches	GASOLINE SYSTEM	Gravity
REAR TIRES	31 x 4 inches	CLUTCH	Cone
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Plain bevel
ARRANGED	Vertically	REAR AXLE	Three-quarters floating
CAST	En bloc	STEERING GEAR	Worm and sector
HORSEPOWER	14.4 (N. A. C. C. Rating)		

In addition to above specifications, price includes top, top hood, windshield and demountable rims

**KISSEL MOTOR
CAR COMPANY**
**HARTFORD
WISCONSIN**

Price, Chassis \$950
With Standard Stake or Express
Body 1075

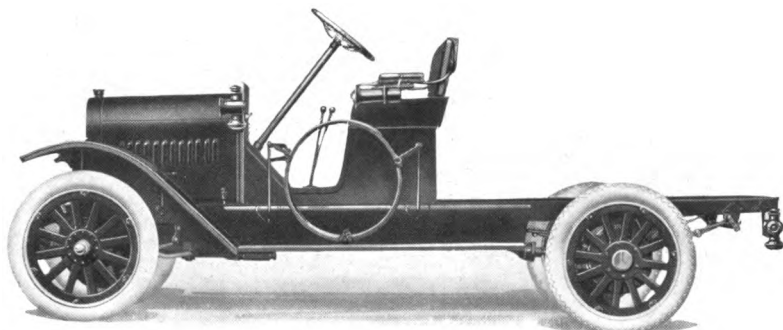

KISSEL-KAR ONE-THOUSAND-POUND DELIVERY


COLOR	Lead	HORSEPOWER	24.03 (N. A. C. C. Rating)
CARRYING CAPACITY.	1000 pounds	BORE AND STROKE	3 $\frac{1}{8}$ x 5 $\frac{1}{2}$ inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	115 inches	RADIATOR	Square tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	32 x 4 inches	GASOLINE SYSTEM	Vacuum
REAR TIRES	32 x 4 inches, anti-skid	CLUTCH	Cone
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Contracting on rear wheels	GEAR CHANGES	Three
CYLINDERS	Four	DRIVE	Spiral bevel
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Split nut and worm

KISSEL MOTOR CAR COMPANY

MASTERS OF THE MOTOR CAR BUSINESS SINCE 1901 1000 MAIN STREET, HARTFORD, CONNECTICUT

**HARTFORD
WISCONSIN**

Price, Chassis \$2100
With Standard Stake or Express
Body 2250

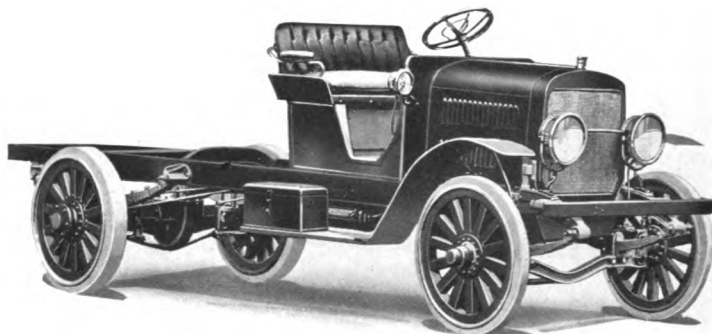


KISSEL-KAR TWO-TON TRUCK

COLOR	Lead	HORSEPOWER	28.9 (N. A. C. C. Rating)
CARRYING CAPACITY	Two tons	BORE AND STROKE	4 1/4 x 5 1/2 inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	144 inches	RADIATOR	Square tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	34 x 3 1/2 inches, single solid	GASOLINE SYSTEM	Vacuum
REAR TIRES	36 x 6 inches, single solid	CLUTCH	Cone
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Four
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Split nut and worm

**KISSEL MOTOR
CAR COMPANY**
**HARTFORD
WISCONSIN**

Price, Chassis \$1250
**With Standard Stake or Express
body 1400**

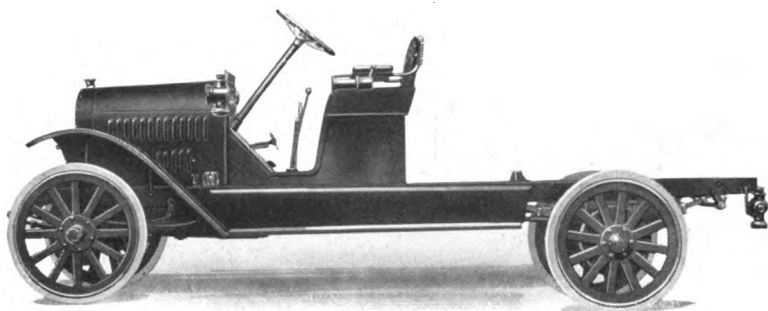


KISSEL-KAR ONE-TON TRUCK

COLOR	Lead	CAST	En bloc
CARRYING CAPACITY	One ton	HORSEPOWER	24.03
POSITION OF DRIVER	Left side		(N. A. C. C. Rating)
WHEELBASE	132 inches	BORE AND STROKE	3½ x 5½ inches
GAUGE	56 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Square tube
FRONT TIRES	35 x 4½ inches, plain, or 34 x 3 inches, solid	COOLING	Water pump
REAR TIRES	35 x 4½ inches, anti-skid, or 34 x 4 inches, solid	IGNITION	High-tension magneto
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three
		DRIVE	Worm
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and sector

KISSEL MOTOR CAR COMPANY

HARTFORD
WISCONSIN

Price, Chassis \$2100
With Standard Stake or Express
Body 2250

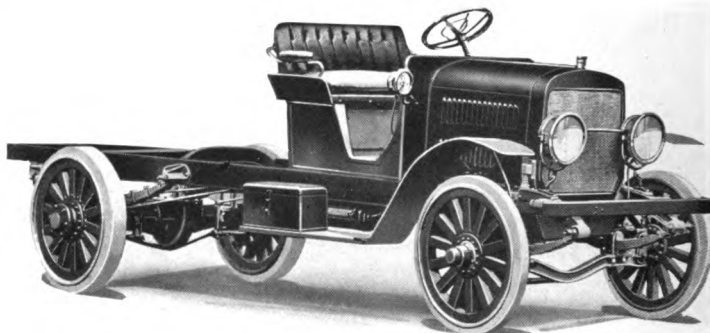


KISSEL-KAR TWO-TON TRUCK

COLOR	Lead	HORSEPOWER	28.9 (N. A. C. C. Rating)
CARRYING CAPACITY	Two tons	BORE AND STROKE	4 1/4 x 5 1/2 inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	144 inches	RADIATOR	Square tube
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	34 x 3 1/2 inches, single solid	GASOLINE SYSTEM	Vacuum
REAR TIRES	36 x 6 inches, single solid	CLUTCH	Cone
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Four
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Split nut and worm

**KISSEL MOTOR
CAR COMPANY**
HARTFORD
WISCONSIN

Price, Chassis \$1250
With Standard Stake or Express
body 1400

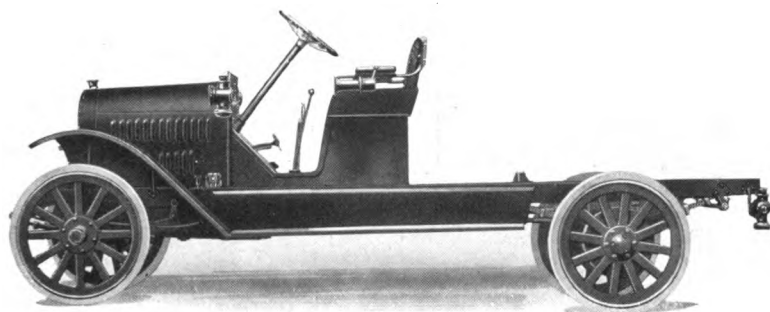


KISSEL-KAR ONE-TON TRUCK

COLOR	Lead	CAST	En bloc
CARRYING CAPACITY	One ton	HORSEPOWER	24.03
POSITION OF DRIVER	Left side	(N. A. C. C. Rating)	
WHEELBASE	132 inches	BORE AND STROKE	3 7/8 x 5 1/2 inches
GAUGE	56 inches	LUBRICATION	Splash with circulating pump
WHEELS	Wood	RADIATOR	Square tube
FRONT TIRES	35 x 4 1/2 inches, plain, or 34 x 3 inches, solid	COOLING	Water pump
REAR TIRES	35 x 4 1/2 inches, anti-skid, or 34 x 4 inches, solid	IGNITION	High-tension magneto
SERVICE BRAKE	Expanding on rear wheels	GASOLINE SYSTEM	Vacuum
EMERGENCY BRAKE	Expanding on rear wheels	CLUTCH	Cone
CYLINDERS	Four	TRANSMISSION	Selective sliding
ARRANGED	Vertically	GEAR CHANGES	Three
		DRIVE	Worm
		REAR AXLE	Semi-floating
		STEERING GEAR	Worm and sector

**PEERLESS
MOTOR CAR
COMPANY**
CLEVELAND, OHIO

Price, Chassis, \$3000

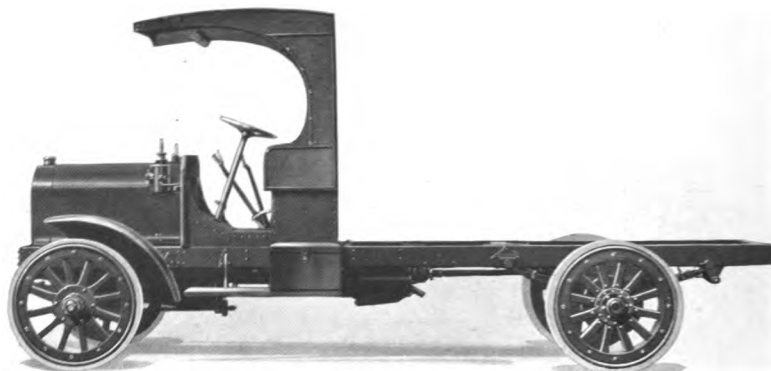


PEERLESS TWO-TON TRUCK—TC-2

COLOR	Lead	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY	Two tons	BORE AND STROKE	4½ x 6½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Full splash
WHEELBASE	145 inches	RADIATOR	Tubular
GAUGE	68 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto and storage battery
FRONT TIRES	36 x 4 inches, single solid	GASOLINE SYSTEM	Gravity
REAR TIRES	36 x 4 inches, dual solid	CLUTCH	Cone
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Live
CAST	In pairs	STEERING GEAR	Worm and sector

**PEERLESS
MOTOR CAR
COMPANY**

CLEVELAND, OHIO

Price, Chassis . . \$4500
Three-Ton . . . 3700
Four-Ton . . . 4000
Six-Ton . . . 6000

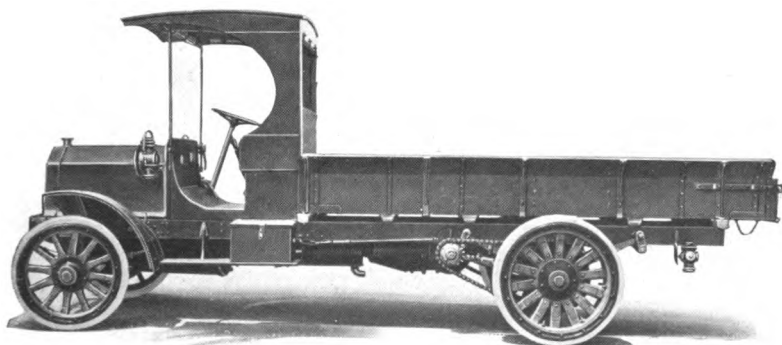


PEERLESS FIVE-TON TRUCK—TC-5

COLOR	Lead	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY	10,000 pounds	BORE AND STROKE	4½ x 6½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Full splash
WHEELBASE	151 inches	RADIATOR	Tubular
GAUGE	68 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto and storage battery
FRONT TIRES	38 x 6 inches, single solid	GASOLINE SYSTEM	Gravity
REAR TIRES	42 x 6 inches, dual solid	CLUTCH	Cone
SERVICE BRAKE	Contracting on jack shaft	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Four forward, one reverse
CYLINDERS	Four	DRIVE	Side chain
ARRANGED	Vertically	REAR AXLE	Dead
CAST	In pairs	STEERING GEAR	Worm and sector

**PEERLESS
MOTOR CAR
COMPANY**
CLEVELAND, OHIO

Price, Chassis, \$3000

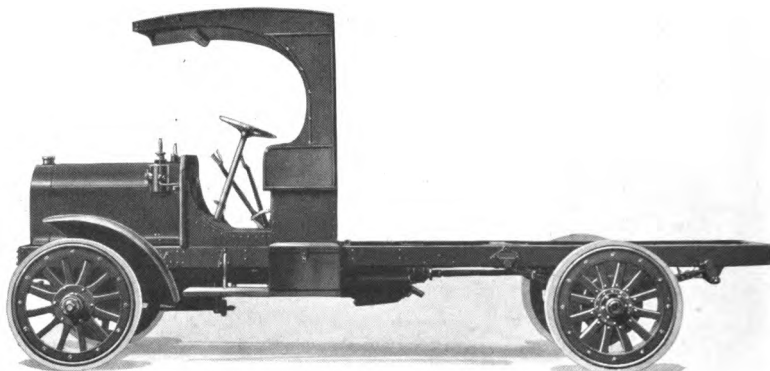


PEERLESS TWO-TON TRUCK—TC-2

COLOR	Lead	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY	Two tons	BORE AND STROKE	4½ x 6½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Full splash
WHEELBASE	145 inches	RADIATOR	Tubular
GAUGE	68 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto and storage battery
FRONT TIRES	36 x 4 inches, single solid	GASOLINE SYSTEM	Gravity
REAR TIRES	36 x 4 inches, dual solid	CLUTCH	Cone
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Live
CAST	In pairs	STEERING GEAR	Worm and sector

**PEERLESS
MOTOR CAR
COMPANY**

CLEVELAND, OHIO

Price, Chassis . . \$4500
Three-Ton . . . 3700
Four-Ton . . . 4000
Six-Ton 6000

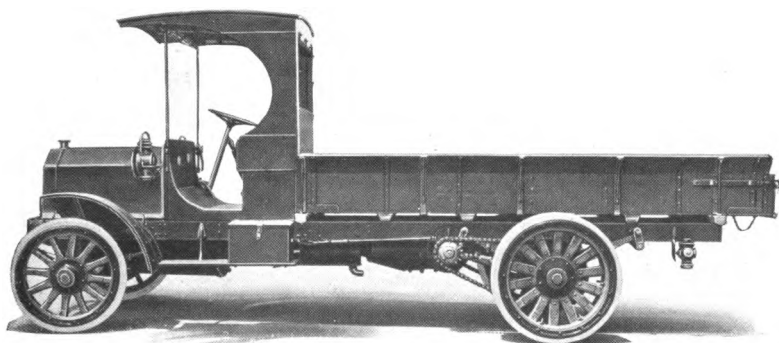


PEERLESS FIVE-TON TRUCK—TC-5

COLOR	Lead	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY	10,000 pounds	BORE AND STROKE . .	4½ x 6½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Full splash
WHEELBASE	151 inches	RADIATOR	Tubular
GAUGE	68 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto and storage battery
FRONT TIRES	38 x 6 inches, single solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	42 x 6 inches, dual solid	CLUTCH	Cone
SERVICE BRAKE . . .	Contracting on jack shaft	TRANSMISSION . . .	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Four forward, one reverse
CYLINDERS	Four	DRIVE	Side chain
ARRANGED	Vertically	REAR AXLE	Dead
CAST	In pairs	STEERING GEAR . . .	Worm and sector

THE WHITE COMPANY

CLEVELAND, OHIO

Price, Chassis \$2100
With Standard Body 2250

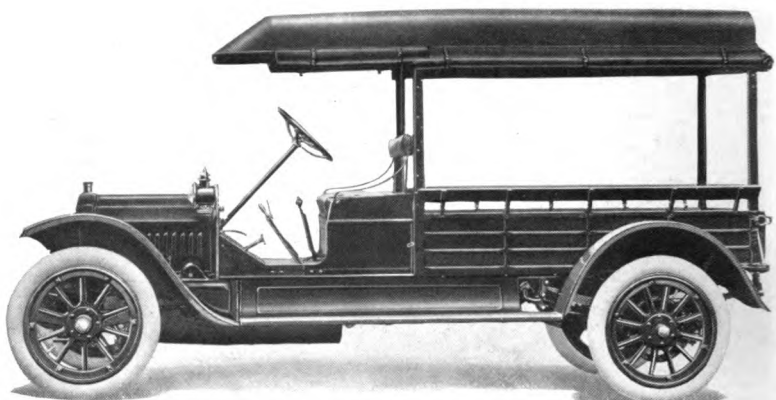

WHITE THREE-QUARTER-TON TRUCK—GBBE


COLOR	Chassis, red; body, dark green	HORSEPOWER	22.5 (N. A. C. C. Rating)
CARRYING CAPACITY	1500 pounds	BORE AND STROKE	3¼ x 5½ inches
POSITION OF DRIVER	Left side	LUBRICATION	Force feed and splash
WHEELBASE	133½ inches	RADIATOR	Honeycomb
GAUGE	56 inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	34 x 4 inches, pneumatic	LIGHTING SYSTEM	Gas
REAR TIRES	34 x 4 inches, pneumatic	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on rear wheels	CLUTCH	Single plate in oil
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Four
ARRANGED	Vertically	DRIVE	Plain bevel
CAST	En bloc	REAR AXLE	Semi-floating
		STEERING GEAR	Worm and sector

In addition to above specifications, price includes prestolite tank and demountable rims

THE WHITE COMPANY

CLEVELAND, OHIO

Price, Chassis \$3000
With Standard Body . . 3150

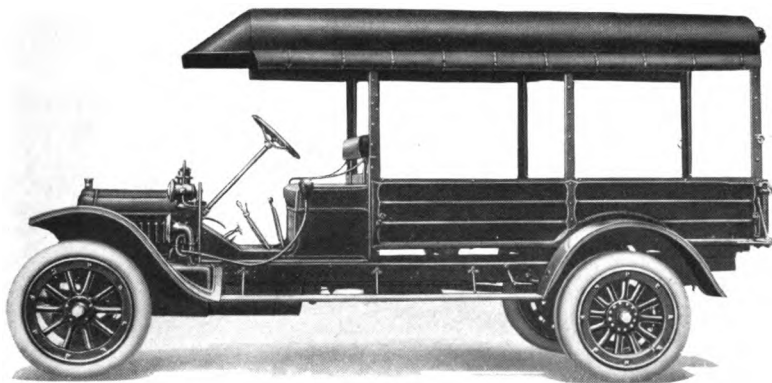

WHITE ONE-AND-ONE-HALF-TON TRUCK—TBC


COLOR	Red	BORE AND STROKE . .	3¼ x 5½ inches
CARRYING CAPACITY .	3000 pounds	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Honeycomb
WHEELBASE	145½ inches	COOLING	Water pump
GAUGE	56 inches	IGNITION	High-tension magneto
WHEELS	Wood	LIGHTING SYSTEM . .	Gas
FRONT TIRES	36 x 4½ inches	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 4½ inches, dual solid	CLUTCH	Single plate in oil
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Four
CYLINDERS	Four	DRIVE	Plain bevel
ARRANGED	Vertically	REAR AXLE	Semi-floating
CAST	En bloc	STEERING GEAR . . .	Worm and sector
HORSEPOWER	22.5 (N. A. C. C. Rating)		

In addition to above specifications, price includes demountable rims

THE WHITE COMPANY


CLEVELAND, OHIO

Price, Chassis, \$3700
With Standard Body . 3850

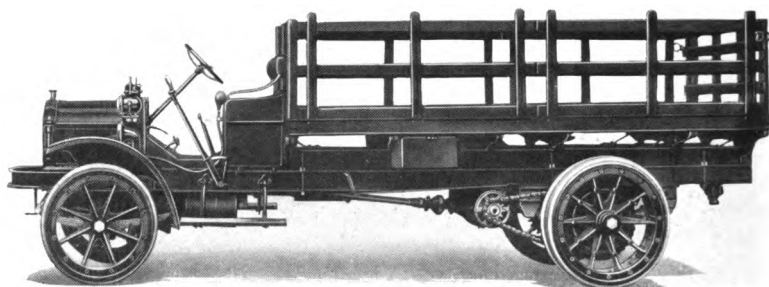

WHITE THREE-TON TRUCK—TAD

COLOR	Red	BORE AND STROKE	3¼ x 5¼ inches
CARRYING CAPACITY.	Three tons	LUBRICATION	Force feed and splash
POSITION OF DRIVER	Left side	RADIATOR	Honeycomb
WHEELBASE	163 inches	COOLING	Water pump
GAUGE	Front, 64 inches	IGNITION	High-tension magneto
WHEELS	Cast steel	LIGHTING SYSTEM . . .	Gas
FRONT TIRES	36 x 5 inches, single solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	40 x 5 inches, dual solid	CLUTCH	Single plate in oil
SERVICE BRAKE . . .	Contracting on jack shaft drums	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Four
CYLINDERS	Four	DRIVE	Double side chain
ARRANGED	Vertically	REAR AXLE	Dead
CAST	En bloc	STEERING GEAR . . .	Worm and sector
HORSEPOWER	22.5 (N. A. C. C. Rating)		

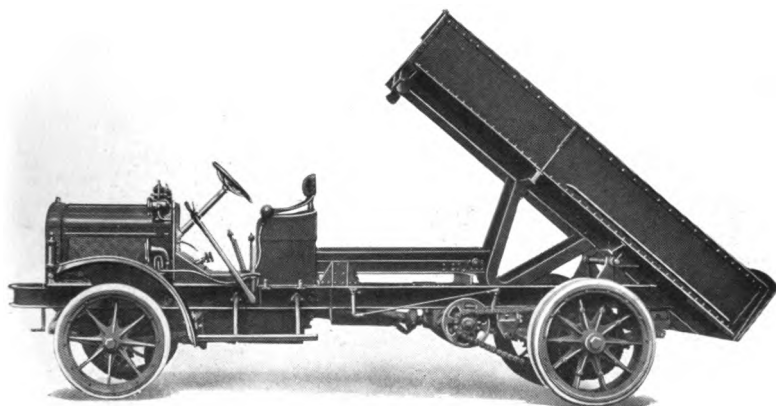


WHITE FIVE-TON POWER DUMPING TRUCK—ATCD

COLOR	Red	BORE AND STROKE . .	4¼ x 6½ inches
CARRYING CAPACITY .	Five tons	LUBRICATION	Force feed and splash
POSITION OF DRIVER .	Left side	RADIATOR	Honeycomb
WHEELBASE	149 inches	COOLING	Water pump
GAUGE	Front, 64 inches	IGNITION	High-tension magneto
WHEELS	Cast steel	LIGHTING SYSTEM . .	Gas
FRONT TIRES	36 x 5 inches, single solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	40 x 6 inches, dual solid	CLUTCH	Single plate in oil
SERVICE BRAKE . . .	Contracting on jack shaft drums	TRANSMISSION	Selective sliding
EMERGENCY BRAKE . .	Expanding on rear wheels	GEAR CHANGES . . .	Four
CYLINDERS	Four	DRIVE	Double side chain
ARRANGED	Vertically	REAR AXLE	Dead
CAST	En bloc	STEERING GEAR . . .	Worm and sector
HORSEPOWER	28.9 (N. A. C. C. Rating)		

**S E L D E N
M O T O R
V E H I C L E
C O M P A N Y
R O C H E S T E R
N E W Y O R K**

Price, Chassis, \$1700

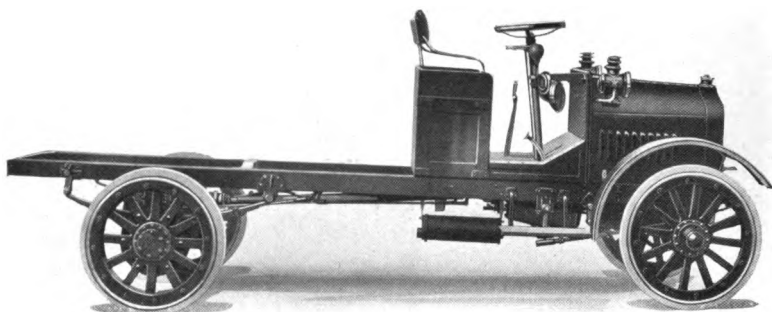


S E L D E N O N E - T O N T R U C K — T

COLOR	Optional	HORSEPOWER	19.6 (N. A. C. C. Rating)
CARRYING CAPACITY	One and one-quarter tons	BORE AND STROKE	3½ x 5 inches
POSITION OF DRIVER	Right side	LUBRICATION	Splash with circulating pump
WHEELBASE	126½ inches	RADIATOR	Tubular
GAUGE	Front, 56 inches; rear, 58 inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	34 x 3 inches, solid	GASOLINE SYSTEM	Gravity
REAR TIRES	34 x 4 inches, solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Worm and nut

**S E L D E N
M O T O R
V E H I C L E
C O M P A N Y
R O C H E S T E R
N E W Y O R K**

Price, Chassis, \$2250

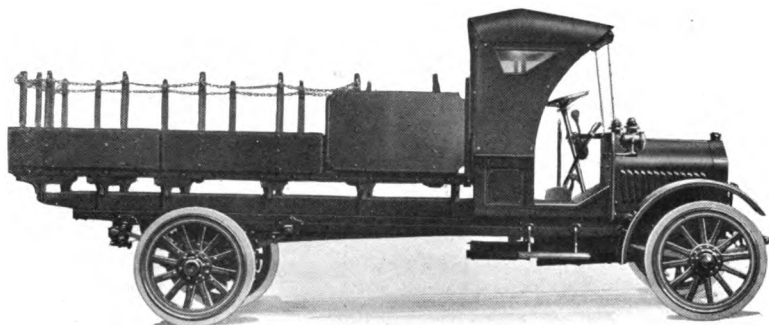


SELDEN TWO-TON TRUCK—JWL

COLOR	Optional	HORSEPOWER	27.23 (N. A. C. C. Rating)
CARRYING CAPACITY .	Two tons	BORE AND STROKE . .	4½ x 5¼ inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	150 inches	RADIATOR	Cellular
GAUGE	Front, 56 inches; rear, 58¼ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 4 inches, solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 6 inches, solid	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION . . .	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR . . .	Worm and nut

**S E L D E N
M O T O R
V E H I C L E
C O M P A N Y
R O C H E S T E R
N E W Y O R K**

Price, Chassis, \$1700

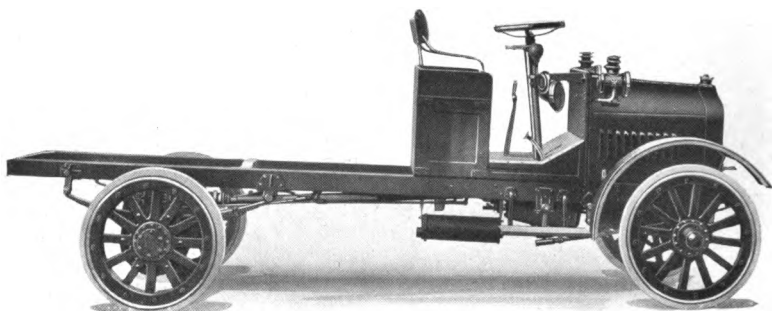


SELDEN ONE-TON TRUCK—T

COLOR	Optional	HORSEPOWER	19.6 (N. A. C. C. Rating)
CARRYING CAPACITY	One and one-quarter tons	BORE AND STROKE	3½ x 5 inches
POSITION OF DRIVER	Right side	LUBRICATION	Splash with circulating pump
WHEELBASE	126½ inches	RADIATOR	Tubular
GAUGE	Front, 56 inches; rear, 58 inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	34 x 3 inches, solid	GASOLINE SYSTEM	Gravity
REAR TIRES	34 x 4 inches, solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Worm and nut

**SELDEN
MOTOR
VEHICLE
COMPANY**
ROCHESTER
NEW YORK

Price, Chassis, \$2250

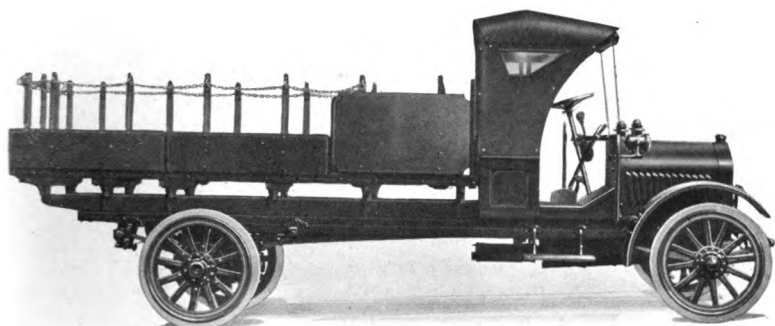


SELDEN TWO-TON TRUCK—JWL

COLOR	Optional	HORSEPOWER	27.23 (N. A. C. C. Rating)
CARRYING CAPACITY .	Two tons	BORE AND STROKE . .	4½ x 5¼ inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	150 inches	RADIATOR	Cellular
GAUGE	Front, 56 inches; rear, 58¼ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 4 inches, solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 6 inches, solid	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Three forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	En bloc	STEERING GEAR	Worm and nut

**SELDEN
MOTOR
VEHICLE
COMPANY**
ROCHESTER
NEW YORK

Price, Chassis, \$2000

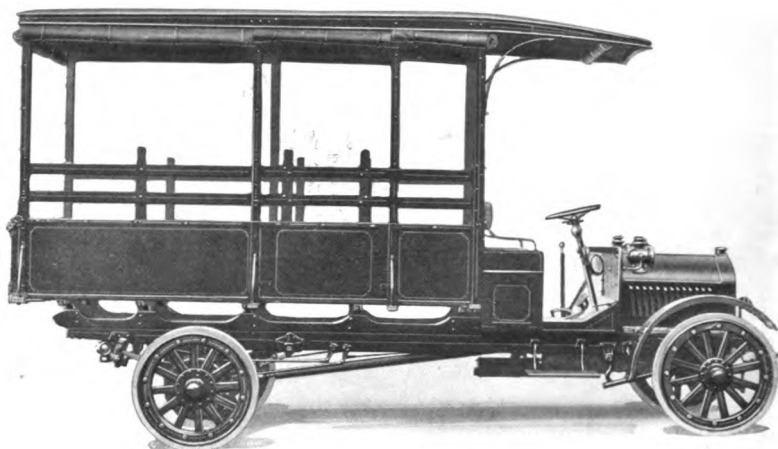


SELDEN TWO-TON TRUCK—JC

COLOR	Optional	HORSEPOWER	22.5 (N. A. C. C. Rating)
CARRYING CAPACITY .	Two tons	BORE AND STROKE .	3¼ x 5¼ inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	150 inches	RADIATOR	Tubular
GAUGE	Front, 56 inches; rear, 58¾ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 4 inches, solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 6 inches, solid	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Three forward, one reverse
CYLINDERS	Four	DRIVE	Internal gear
ARRANGED	Vertically	REAR AXLE	Dead
CAST	En bloc	STEERING GEAR	Worm and nut

**SELDEN
MOTOR
VEHICLE
COMPANY
ROCHESTER
NEW YORK**

Price, Chassis, \$2950

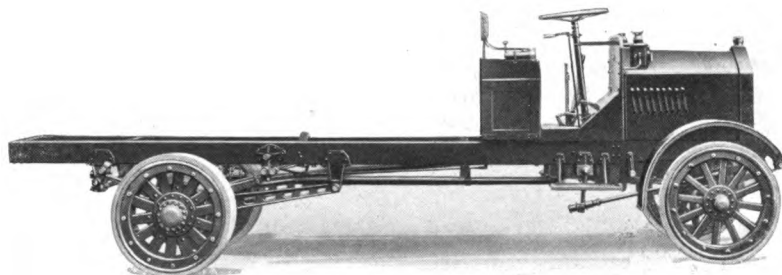


SELDEN THREE-AND-ONE-HALF-TON TRUCK—N

COLOR	Optional	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY .	3½ tons	BORE AND STROKE . .	4½ x 5½ inches
POSITION OF DRIVER	Right side	LUBRICATION	Splash with circulating pump
WHEELBASE	164 inches	RADIATOR	Cellular
GAUGE	Front, 61 inches; rear, 66¾ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 5 inches, solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 5 inches, dual solid	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Four forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	In pairs	STEERING GEAR	Worm and nut

**S E L D E N
M O T O R
V E H I C L E
C O M P A N Y
R O C H E S T E R
N E W Y O R K**

Price, Chassis, \$2000

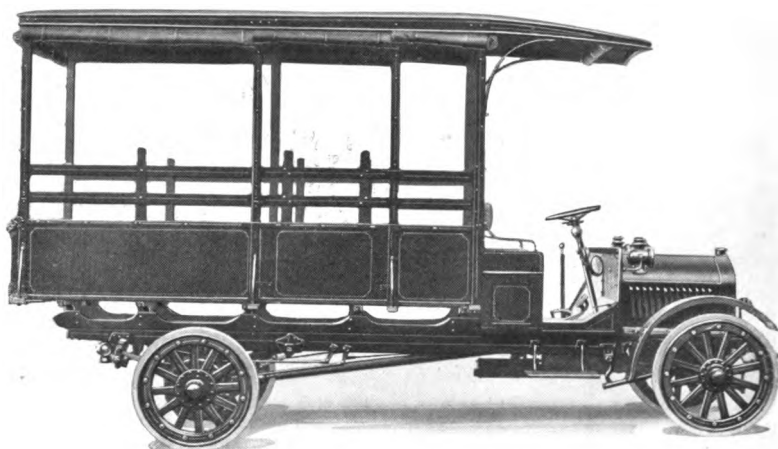


SELDEN TWO-TON TRUCK—JC

COLOR Optional
CARRYING CAPACITY . . . Two tons
POSITION OF DRIVER . . . Left side
WHEELBASE 150 inches
GAUGE Front, 56 inches;
rear, 58 $\frac{1}{4}$ inches
WHEELS Wood
FRONT TIRES 36 x 4 inches,
solid
REAR TIRES 36 x 6 inches,
solid
SERVICE BRAKE . . . Contracting on
rear wheels
EMERGENCY BRAKE . . Expanding on
rear wheels
CYLINDERS Four
ARRANGED Vertically
CAST En bloc

HORSEPOWER 22.5
(N. A. C. C. Rating)
BORE AND STROKE . . . 3 $\frac{3}{4}$ x 5 $\frac{1}{4}$ inches
LUBRICATION Splash with cir-
culating pump
RADIATOR Tubular
COOLING Water pump
IGNITION High-tension
magneto
GASOLINE SYSTEM . . . Gravity
CLUTCH Dry multiple disc
TRANSMISSION Selective sliding
GEAR CHANGES Three forward,
one reverse
DRIVE Internal gear
REAR AXLE Dead
STEERING GEAR Worm and nut

**SELDEN
MOTOR
VEHICLE
COMPANY
ROCHESTER
NEW YORK**

Price, Chassis, \$2950

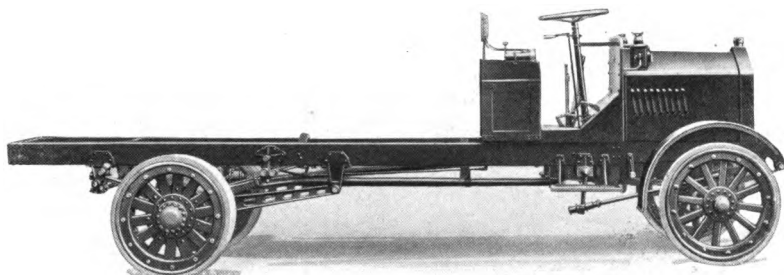


SELDEN THREE-AND-ONE-HALF-TON TRUCK—N

COLOR	Optional	HORSEPOWER	32.4 (N. A. C. C. Rating)
CARRYING CAPACITY .	3½ tons	BORE AND STROKE . .	4½ x 5¼ inches
POSITION OF DRIVER	Right side	LUBRICATION	Splash with circulating pump
WHEELBASE	164 inches	RADIATOR	Cellular
GAUGE	Front, 61 inches; rear, 66¾ inches	COOLING	Water pump
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 5 inches, solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 5 inches, dual solid	CLUTCH	Dry multiple disc
SERVICE BRAKE . . .	Expanding on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE .	Expanding on rear wheels	GEAR CHANGES . . .	Four forward, one reverse
CYLINDERS	Four	DRIVE	Worm
ARRANGED	Vertically	REAR AXLE	Full floating
CAST	In pairs	STEERING GEAR	Worm and nut

**D E N B Y
MOTOR TRUCK
C O M P A N Y
D E T R O I T
M I C H I G A N**

Price	\$890
With Electric Starter, Generator, Battery and Lights	975
With Removable Panel Body and Windshield	980
With Full Tarpaulin Top and Windshield	950

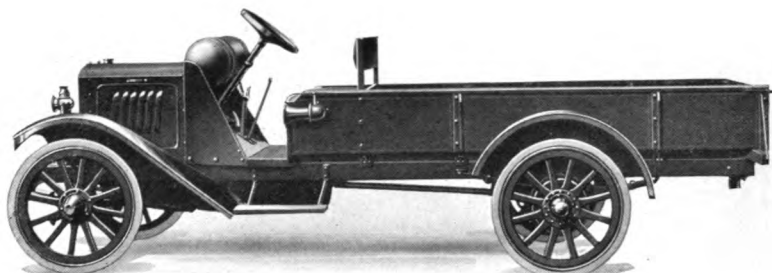


**DENBY THREE-QUARTER-TON TRUCK WITH EXPRESS BODY—
TYPE U**

COLOR	Body, blue; chassis, red	CAST	En bloc
CARRYING CAPACITY	$\frac{3}{4}$ tons	HORSEPOWER	15.63 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	$3\frac{1}{8} \times 4\frac{1}{2}$ inches
WHEELBASE	119 inches	LUBRICATION	Splash with cir- culating pump
GAUGE	56 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Thermo-syphon
FRONT TIRES	34×3 inches, solid	IGNITION	High-tension magneto
REAR TIRES	$34 \times 3\frac{1}{2}$ inches solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on rear wheels	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three
ARRANGED	Vertically	DRIVE	Internal gear
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

D E N B Y
MOTOR TRUCK
C O M P A N Y

D E T R O I T
M I C H I G A N

Price, Chassis \$1685
 With Standard Stake Body . 1845
 With Baggage Transfer Body 1840
 With Coal and Coke Body . . 2000

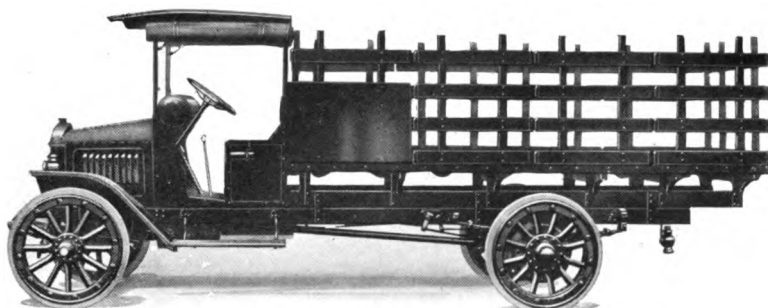


**DENBY ONE-AND-ONE-HALF-TON TRUCK WITH STANDARD
 STAKE BODY—TYPE D**

COLOR	Lead	HORSEPOWER	22.5 (N. A. C. C. Rating)
CARRYING CAPACITY .	1½ tons	BORE AND STROKE . .	3¼ x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	144 inches	RADIATOR	Tubular
GAUGE	Front, 56½ inches; rear, 59½ inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 3½ inches, solid	GASOLINE SYSTEM . .	Gravity
REAR TIRES	36 x 5 inches solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE . .	Expanding on rear wheels	GEAR CHANGES . . .	Three
CYLINDERS	Four	DRIVE	Internal gear
ARRANGED	Vertically	REAR AXLE	Dead
CAST	En bloc	STEERING GEAR	Worm and wheel

**D E N B Y
MOTOR TRUCK
C O M P A N Y
D E T R O I T
M I C H I G A N**

Price	\$890
With Electric Starter, Generator, Battery and Lights	975
With Removable Panel Body and Windshield	980
With Full Tarpaulin Top and Windshield	950

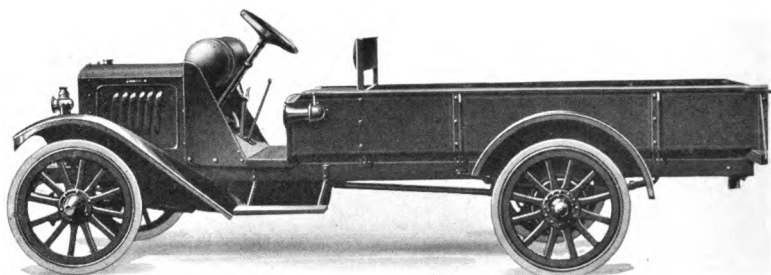


**DENBY THREE-QUARTER-TON TRUCK WITH EXPRESS BODY—
TYPE U**

COLOR	Body, blue; chassis, red	CAST	En bloc
CARRYING CAPACITY	$\frac{3}{4}$ tons	HORSEPOWER	15.63 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	$3\frac{1}{2} \times 4\frac{1}{2}$ inches
WHEELBASE	119 inches	LUBRICATION	Splash with cir- culating pump
GAUGE	56 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Thermo-syphon
FRONT TIRES	34×3 inches, solid	IGNITION	High-tension magneto
REAR TIRES	$34 \times 3\frac{1}{2}$ inches solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on rear wheels	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three
ARRANGED	Vertically	DRIVE	Internal gear
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

D E N B Y
MOTOR TRUCK
C O M P A N Y

D E T R O I T
M I C H I G A N

Price, Chassis \$1685
 With Standard Stake Body . . 1845
 With Baggage Transfer Body . . 1840
 With Coal and Coke Body . . 2000

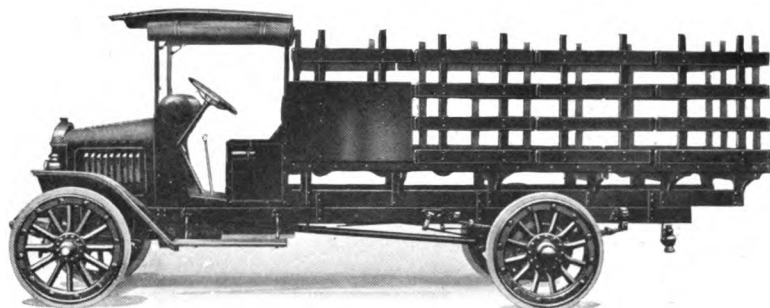


**DENBY ONE-AND-ONE-HALF-TON TRUCK WITH STANDARD
 STAKE BODY—TYPE D**

COLOR	Lead	HORSEPOWER	22.5 (N. A. C. C. Rating)
CARRYING CAPACITY . .	1½ tons	BORE AND STROKE . . .	3¼ x 5 inches
POSITION OF DRIVER . .	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	144 inches	RADIATOR	Tubular
GAUGE	Front, 56½ inches; rear, 59½ inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 3½ inches, solid	GASOLINE SYSTEM . . .	Gravity
REAR TIRES	36 x 5 inches solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE . . .	Expanding on rear wheels	GEAR CHANGES	Three
CYLINDERS	Four	DRIVE	Internal gear
ARRANGED	Vertically	REAR AXLE	Dead
CAST	En bloc	STEERING GEAR	Worm and wheel

D E N B Y
MOTOR TRUCK
COMPANY

D E T R O I T
M I C H I G A N

Price	\$890
With Electric Starter, Generator, Battery and Lights	975
With Removable Panel Body and Windshield	980
With Full Tarpaulin Top and Windshield	950

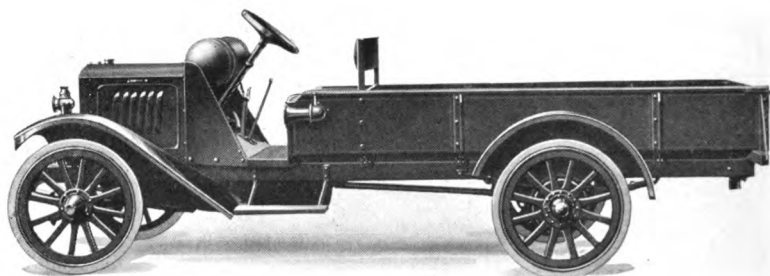


**DENBY THREE-QUARTER-TON TRUCK WITH EXPRESS BODY—
 TYPE U**

COLOR	Body, blue; chassis, red	CAST	En bloc
CARRYING CAPACITY	$\frac{3}{4}$ tons	HORSEPOWER	15.63 (N. A. C. C. Rating)
POSITION OF DRIVER	Left side	BORE AND STROKE	$3\frac{1}{4} \times 4\frac{1}{4}$ inches
WHEELBASE	119 inches	LUBRICATION	Splash with cir- culating pump
GAUGE	56 inches	RADIATOR	Tubular
WHEELS	Wood	COOLING	Thermo-syphon
FRONT TIRES	34×3 inches, solid	IGNITION	High-tension magneto
REAR TIRES	$34 \times 3\frac{1}{2}$ inches solid	GASOLINE SYSTEM	Gravity
SERVICE BRAKE	Contracting on rear wheels	CLUTCH	Dry multiple disc
EMERGENCY BRAKE	Expanding on rear wheels	TRANSMISSION	Selective sliding
CYLINDERS	Four	GEAR CHANGES	Three
ARRANGED	Vertically	DRIVE	Internal gear
		REAR AXLE	Dead
		STEERING GEAR	Worm and nut

**D E N B Y
MOTOR TRUCK
C O M P A N Y
D E T R O I T
M I C H I G A N**

Price, Chassis \$1685
With Standard Stake Body . . 1845
With Baggage Transfer Body 1840
With Coal and Coke Body . . 2000

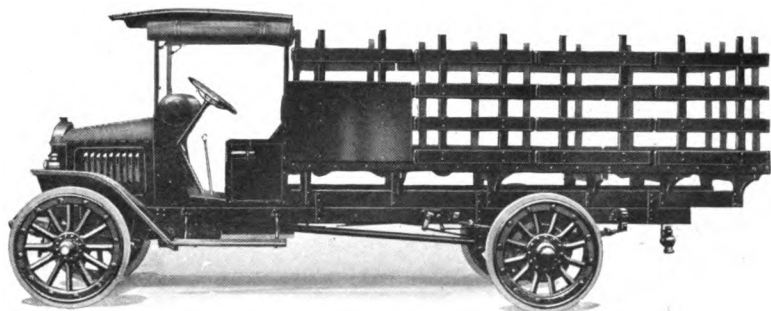

**DENBY ONE-AND-ONE-HALF-TON TRUCK WITH STANDARD
STAKE BODY—TYPE D**

COLOR	Lead	HORSEPOWER	22.5 (N. A. C. C. Rating)
CARRYING CAPACITY	1½ tons	BORE AND STROKE	3¼ x 5 inches
POSITION OF DRIVER	Left side	LUBRICATION	Splash with circulating pump
WHEELBASE	144 inches	RADIATOR	Tubular
GAUGE	Front, 56½ inches; rear, 59½ inches	COOLING	Thermo-syphon
WHEELS	Wood	IGNITION	High-tension magneto
FRONT TIRES	36 x 3½ inches, solid	GASOLINE SYSTEM	Gravity
REAR TIRES	36 x 5 inches solid	CLUTCH	Dry multiple disc
SERVICE BRAKE	Contracting on rear wheels	TRANSMISSION	Selective sliding
EMERGENCY BRAKE	Expanding on rear wheels	GEAR CHANGES	Three
CYLINDERS	Four	DRIVE	Internal gear
ARRANGED	Vertically	REAR AXLE	Dead
CAST	En bloc	STEERING GEAR	Worm and wheel

THE UNIVERSITY OF MICHIGAN

DATE DUE

APR 22 1996

UNIVERSITY OF MICHIGAN



3 9015 02247 4772

THE UNIVERSITY OF MICHIGAN

DATE DUE

APR 22 1996



3 9015 02247 4772

